



PANEL THICKNESS	X
0.75-1.25 [.030-.049]	19.2 [.756]
1.25-2.0 [.049-.079]	19.4 [.764]
2.0-3.0 [.079-.118]	19.8 [.780]







SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	OFF	DN
1a-1	DPEN	1-1b



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY.
4. RATING: 15A @125VAC OR
6A @250VAC
5. MECHANICAL LIFE: 15,000 cycles
6. ELECTRICAL LIFE: 10,000 cycles
7. INSULATION RESISTANCE: >1000 Mega Ω
8. CONTACT RESISTANCE: <20 Mega Ω
9. DIELECTRIC STRENGTH: >1500 V 1 minute
>3000 V between poles
10. ▲ DENOTES CRITICAL PARAMETER.

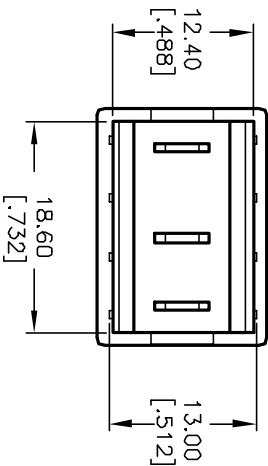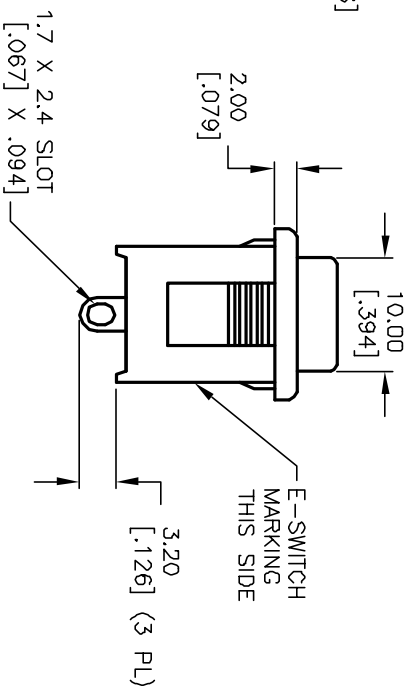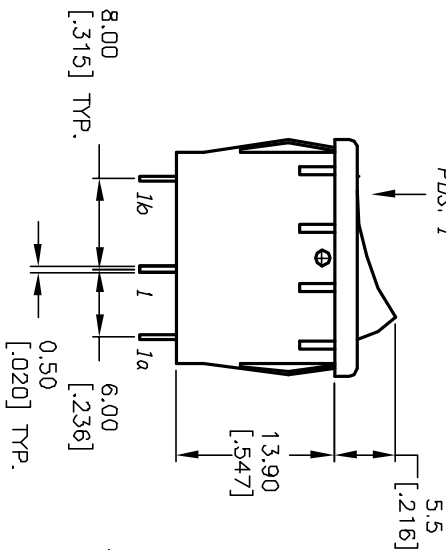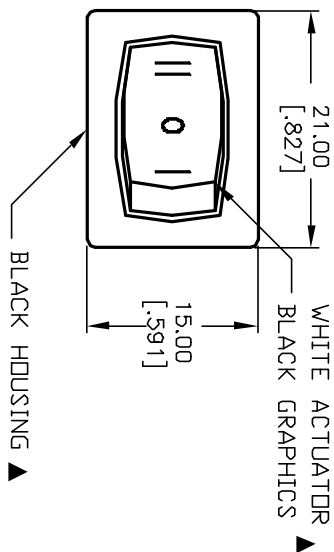

REV.	ECN No.	DESCRIPTION	DATE	CHKD	AR
A	13076	RELEASED FOR PRODUCTION	4/23/03		AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE					
R1966DBLKWHTBS					
SCALE	1.5:1	DATE	4/23/03	DR	AR
				DWG	M309322
REV	A				

E-SWITCH®