


RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.75-1.25	30.0-30.2
1.25-2.00	30.2-30.4
2.00-3.00	30.6-30.8

NEON BULB





CIRCUIT: DPST ON-OFF



PARAMETERS	SYMBOL	MAX.	UNITS
LAMP VOLTAGE (AC)	V	250	V
STARTUP VOLTAGE	Vs	95	V
CURRENT	I	.73	mA
SERIES RESISTANCE	R	150	KΩ

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 20A @125VAC;
15A @250VAC.
- MATERIAL:
CONTACT SURFACE: SILVER ALLOY
TERMINAL: COPPER ALLOY w/SILVER PLATE
- ELECTRICAL LIFE: 10,000 CYCLES
- MECHANICAL LIFE: 30,000 CYCLES
- CONTACT RESISTANCE: <20 mΩ INITIAL
- DIELECTRIC STRENGTH: >1,500V AC 1MIN
- ▲ DENOTES CRITICAL PARAMETER.

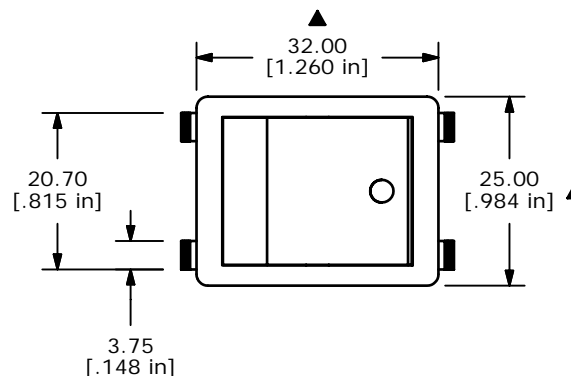

ISOMETRIC

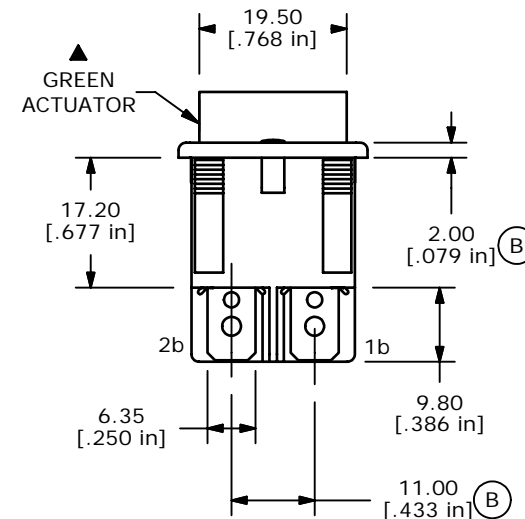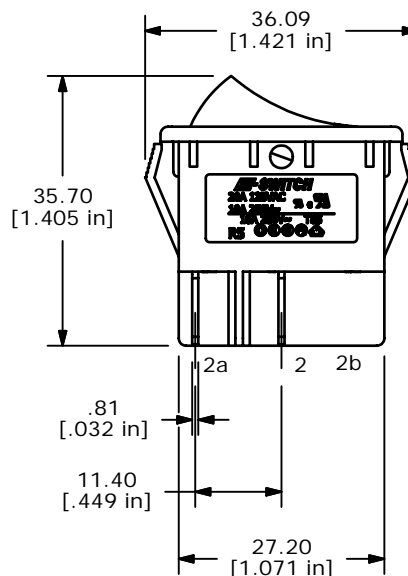

REV	PCR NO	DESCRIPTION	DATE	BY
B	15241	CHANGES NOTED WITH (B)	9/6/05	PH
A	15024 (B)	RELEASED FOR PRODUCTION	6/28/05	JB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE R5BBLKGRNAF2				
SCALE 1:1	DATE 6/28/2005	DR JB	DWG M050247	REV B