



PANEL THICKNESS	X dimension
0.75~1.25 [.030~.049]	30.0 ± 0.2 [1.181]
1.25~2.0 [.049~.079]	30.2 ± 0.2 [1.189]
2.0~3.0 [.079~.118]	30.6 ± 0.2 [1.205]

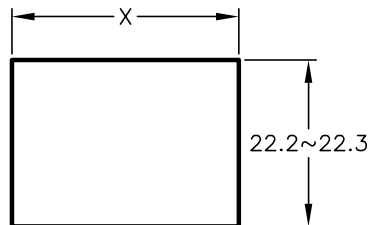




RECOMMENDED PANEL MOUNTING
NOT TO SCALE



CIRCUIT: DPDT
ON-ON

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 20A @125VAC;
15A @250VAC. (Normal Conditions)
5. MATERIAL:
CONTACT SURFACE: Coin Silver, Silver Plated.
TERMINAL: Copper ALLOY w/Silver plate
6. ELECTRICAL LIFE: $\geq 10,000$ cycles
7. MECHANICAL LIFE: 30,000 cycles
8. CONTACT RESISTANCE: < 20 mILLI-Ohms initial
9. DIELECTRIC STRENGTH: $> 1,500$ V AC 1min
 $> 3,000$ V between poles.

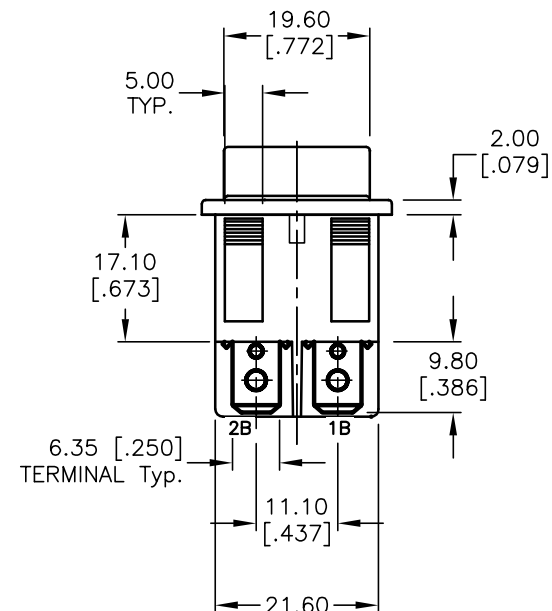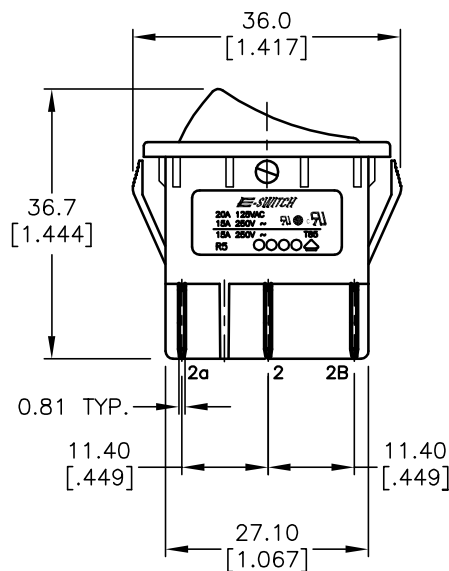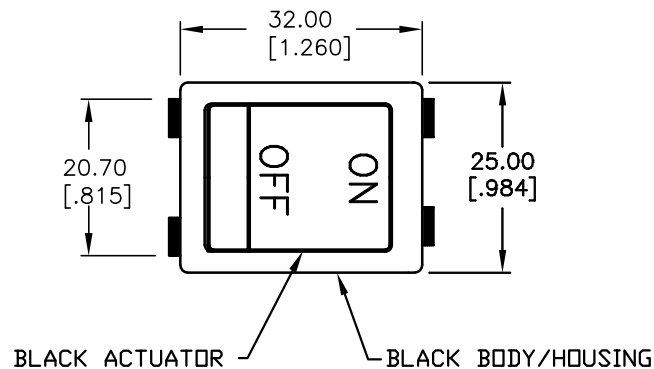

A	13798	RELEASED FOR PRODUCTION	2/24/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE

R5CBLKBLKIF0

SCALE

1:1

DATE

2/24/04

DR

AR

DWG

M050237

REV

A