



PANEL THICKNESS	X dimension
0.75~1.25 [.030~.049]	30.0 +0.2 [1.181]
1.25~2.0 [.049~.079]	30.2 +0.2 [1.189]
2.0~3.0 [.079~.118]	30.6 +0.2 [1.205]

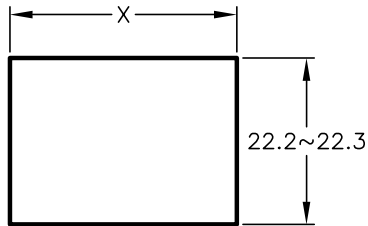




RECOMMENDED PANEL MOUNTING
NOT TO SCALE



▲ CIRCUIT: DPDT
ON-(ON)
(ON) = MOMENTARY

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 20A @125VAC;
15A @250VAC. (Normal Conditions)
- MATERIAL:
CONTACT SURFACE: Coin Silver, Silver Plated.
TERMINAL: Copper ALLOY w/Silver plate
- ELECTRICAL LIFE: ≥10,000 cycles
- MECHANICAL LIFE: 30,000 cycles
- CONTACT RESISTANCE: <20 mLLI-Ohms initial
- DIELECTRIC STRENGTH: >1,500V AC 1min
>3,000V between poles.
- ▲DENOTES CRITICAL PARAMETER.

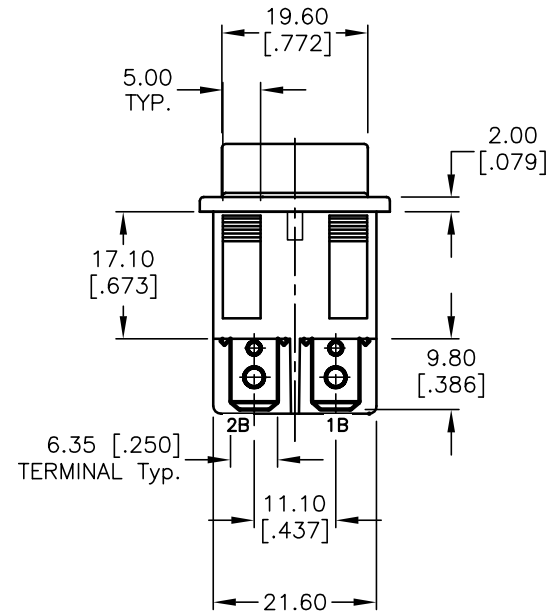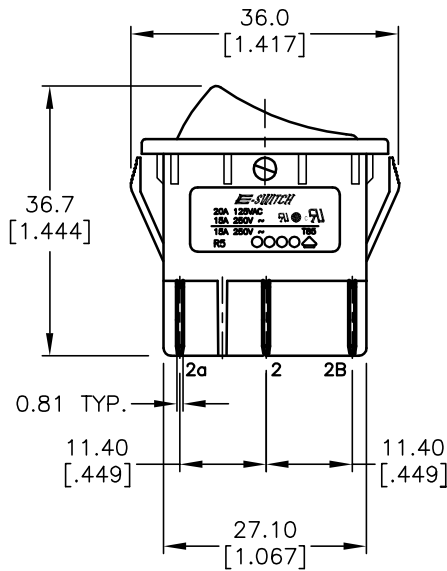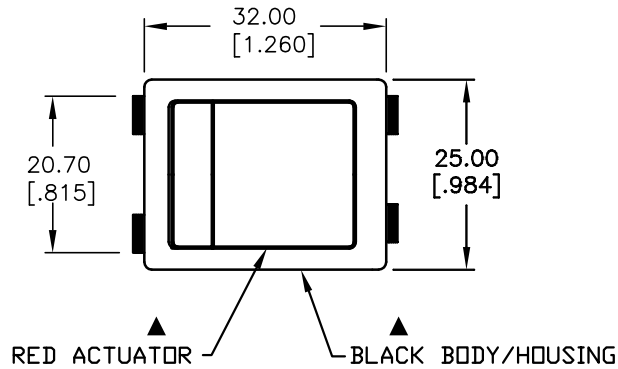

E-SWITCH®

TITLE **R5E BLK RE DEF 0**

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	14106	RELEASED FOR PRODUCTION	6/18/04	AR

SCALE	DATE	DR	DWG	REV
1:1	6/18/04	AR	M050239	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED