



PANEL THICKNESS	X dimension
0.75~1.25 [0.30-.049]	29.5-29.6 ⑦
1.25~2.0 [0.49-.079]	30.5-30.6 ⑦
2.0~3.0 [0.79-.118]	30.65-30.75 ⑦

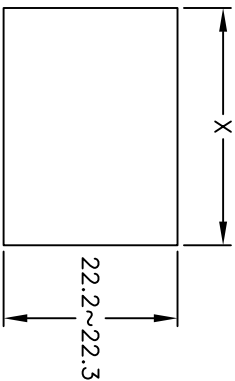

RECOMMENDED PANEL MOUNTING



NOT TO SCALE



CIRCUIT: DPDT
▲ (ON)-OFF-(ON) ⑦
(ON) = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 15A @125VAC;
10A @250VAC. (Normal Conditions)
5. MATERIAL:
CONTACT SURFACE: Coin Silver, Silver Plated.
TERMINAL: Copper ALLOY w/Silver plate
6. ELECTRICAL LIFE: 10,000 cycles
7. MECHANICAL LIFE: 30,000 cycles
8. CONTACT RESISTANCE: <20 mΩ-Ohms initial
9. DIELECTRIC STRENGTH: >1,500V AC 1min
>3,000V between poles.
10. ▲ DENOTES CRITICAL PARAMETER.

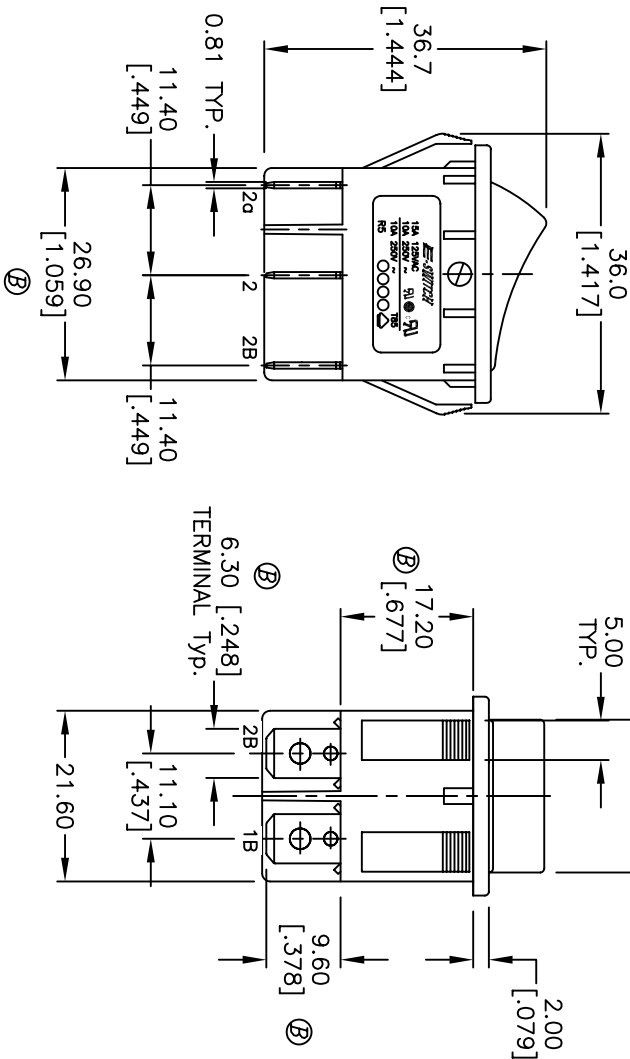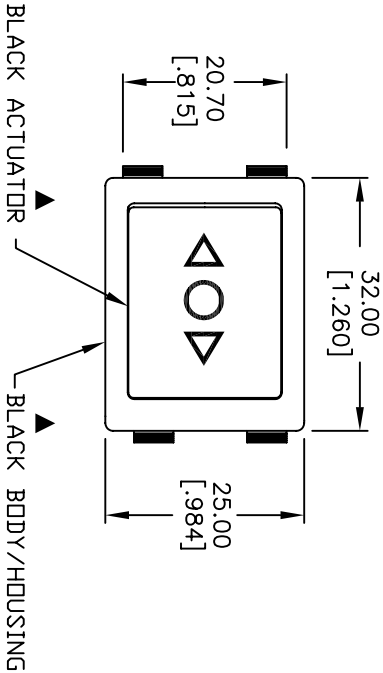

CHANGES NOTED				TITLE			
B	15745		2/8/06	PH	R5GBLKBKHF0		
A	14102	RELEASED FOR PRODUCTION	6/17/04	AR			
REV.	ECN NO.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					1:1	6/17/04	AR
							DWG
							M050238
							REV
							B

E-SWITCH®