

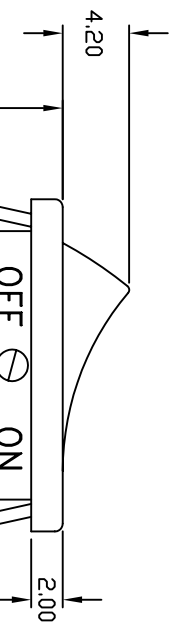


PANEL CUTOUT

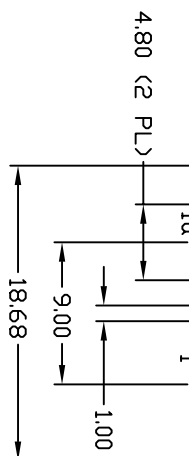


PANEL THICKNESS	X
0.75-1.25	19.20
1.25-2.0	19.40
2.00-3.00	19.60

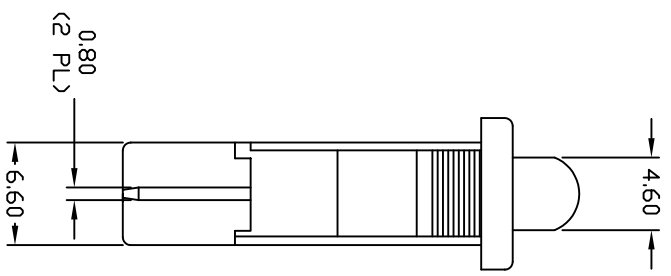

SWITCH FUNCTION	
POS. 1	POS. 2
DN	OFF
1-1a	DPEN

CONTACT CONFIGURATION



CIRCUIT: SPST

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: 0.0=±0.4; 0.00=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. RATING: 4(1)A 250VAC, 10A 125VAC, 6A 250VAC
 5. MECHANICAL LIFE: OVER 30,000 CYCLES
 6. ELECTRICAL LIFE: OVER 10,000 CYCLES
 7. CONTACT RESISTANCE: < 20 MEGA-OHMS (INITIAL)
 8. INSULATION RESISTANCE: > 1000 MEGA-OHMS @ 500VDC
 9. DIELECTRIC STRENGTH: >1500VAC 1 MINUTE (INITIAL)
>3000V BETWEEN POLES
 10. 2002/95/EC (ROHS) COMPLIANT



E-SWITCH

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	16949	17.6 DIM CHANGED TO 17.3	1/31/07	TN
B	16940	UPDATE NOTES, FIXED 17.6 DIM	1/30/07	TN
A	10793	RELEASED FOR PRODUCTION	8/2/00	GLG

TITLE		SCALE	DATE	DR	DWG	REV
R6ABLKREDDFF		2:1	1/31/07	TN	M060305	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED