



PANEL THICKNESS	X dimension
0.75-1.25 [0.030-.049]	19.2-0.1 [0.756]
1.25-2.0 [0.049-.079]	19.4-0.1 [0.764]
2.0-3.0 [0.079-.118]	19.8-0.1 [0.780]

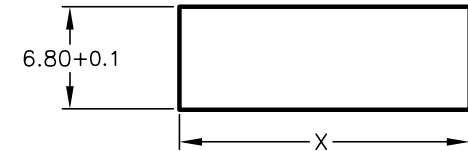

PANEL CUTOUT
NOT TO SCALE

SWITCH FUNCTION	
POS. 1	POS. 2
<ON>	OFF
1-1a	OPEN

()=Momentary



CIRCUIT: SPST

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4; X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- RATING: 4(1)A @250VAC, 6A @250VAC, 10A @125VAC
- MATERIALS: TERMINALS: COPPER ALLOY W/SILVER PLATING
CONTACTS: COIN SILVER
- MECHANICAL LIFE: >50,000 CYCLES
- ELECTRICAL LIFE: >10,000 CYCLES
- CONTACT RESISTANCE: < 20 milli-OHMS (INITIAL)
- INSULATION RESISTANCE: > 1000 MEGA-OHMS @ 500VDC
- DIELECTRIC STRENGTH: >1500VAC 1 MINUTE (INITIAL)
>3000V BETWEEN POLES
- HOUSING & ACTUATOR COLOR:
HOUSING; BLACK
ACTUATOR; BLACK
- ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

TITLE

R6BBLKBLKAF

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13925	RELEASED FOR PRODUCTION	4/20/04	AR

SCALE

1.5:1

DATE

4/20/04

DR

AR

DWG

M060350

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED