




PANEL THICKNESS	X dimension
0.75-1.25 [.030-.049]	19.2-0.1 [.756]
1.25-2.0 [.049-.079]	19.4-0.1 [.764]
2.0-3.0 [.079-.118]	19.8-0.1 [.780]

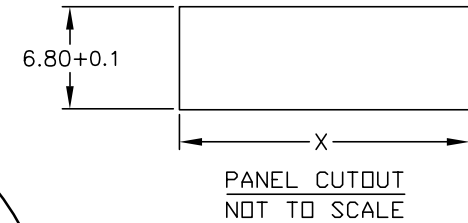

SWITCH FUNCTION	
POS. 1	POS. 2
<ON>	OFF
1-1α	OPEN

()=Momentary



NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X=±0.4; X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- RATING: 4(1)A @250VAC, 6A @250VAC, 10A @125VAC
- MATERIALS: TERMINALS: COPPER ALLOY W/SILVER PLATING
CONTACTS: COIN SILVER
- MECHANICAL LIFE: >50,000 CYCLES
- ELECTRICAL LIFE: >10,000 CYCLES
- CONTACT RESISTANCE: < 20 milli-OHMS (INITIAL)
- INSULATION RESISTANCE: > 1000 MEGA-OHMS @ 500VDC
- DIELECTRIC STRENGTH: >1500VAC 1 MINUTE (INITIAL)
>3000V BETWEEN POLES
- ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

TITLE					R6BBLKBLKFF				
SCALE	DATE	DR	DWG	REV	SCALE	DATE	DR	DWG	REV
1.5:1	11/5/03	AR	M060355	A	1.5:1	11/5/03	AR	M060355	A

A	13578	RELEASED FOR PRODUCTION	11/5/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED