


RECOMMENDED P.C.B. LAYOUT

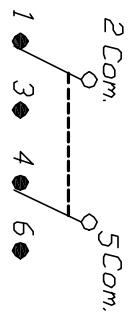


CONTACT CONFIGURATION

DPDT



SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	DEF	DN
2-1,5-4	DPEN	2-3,5-6

NOTES:


1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 5A@120V AC OR 28V DC, 2A@250V AC
5. FIXED AND MOVING: COPPER ALLOY W/ SILVER PLATE
6. CONTACT RESISTANCE: 10mΩ TYP
7. INSULATION RESISTANCE: 1,000 MΩ min.
8. ELECTRICAL LIFE: 30,000 ACTUATIONS @ FULL LOAD
9. OPERATING TEMP: -30°C TO 85°C
10. TRAVEL: 2.16 MM
11. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL



SEE NOTES

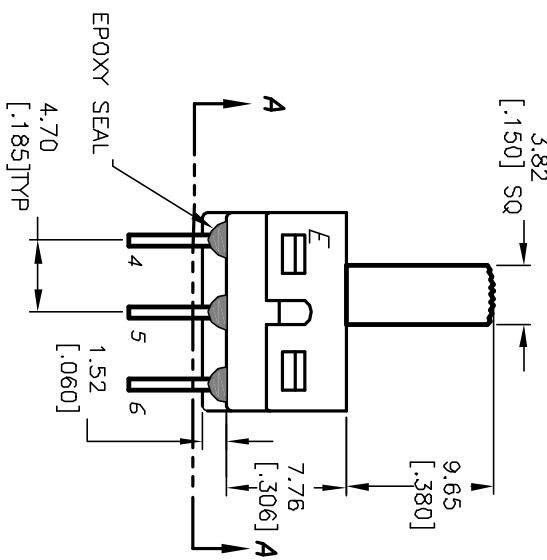

VIEW A-A

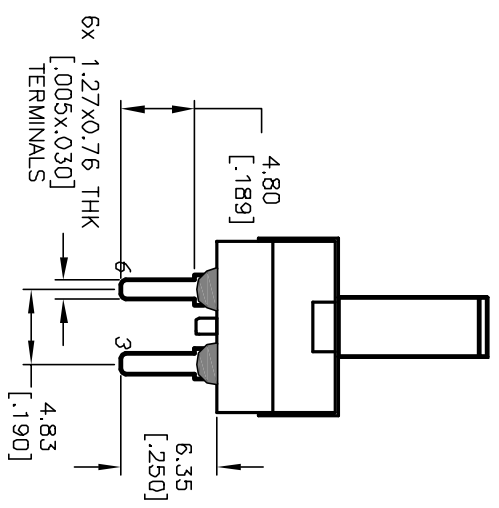

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	11817	RELEASED	8/1/02	CJC

TITLE	SCALE	DATE	DR	DWG	REV
500 SDP-3 S3 M2 Q E A	2:1	8/1/02	CJC	T521013	A

E-SWITCH®

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED