




RECOMMENDED PANEL LAYOUT



CIRCUIT: SPDT

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	DN	DN	DN
2-1	DPEN	2-3	

CONTACT CONFIGURATION

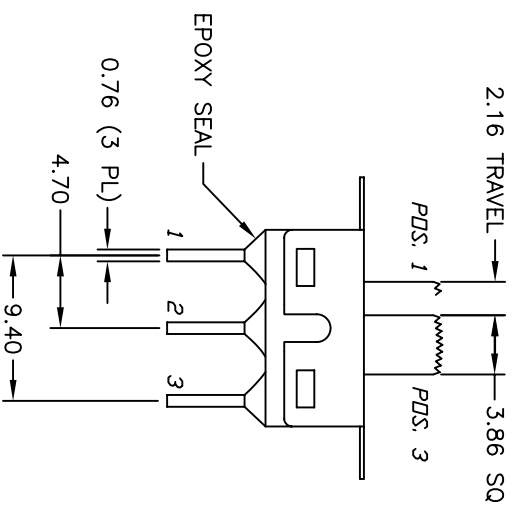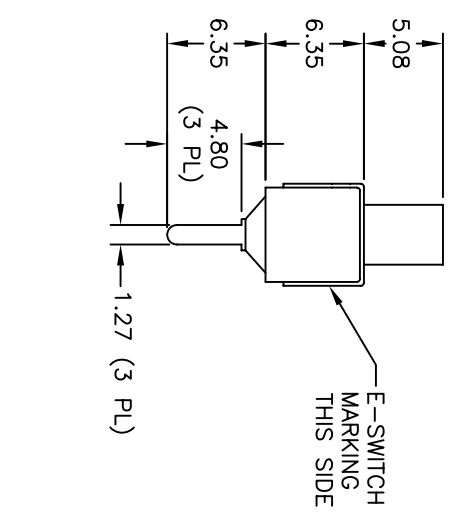

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5 AMPS @ 120VAC OR 28VDC;
2 AMPS @ 250VAC
5. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
6. INSULATION RESISTANCE: 1,000 Mega-ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C



A	10667	RELEASED FOR PRODUCTION	6-7-00	GLG
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
500 SSP-1 S1 M2 Q E B				
SCALE	DATE	DR	DWG	REV
2:1	6-7-00	GLG	TS11027	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED