



| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| POS. 1          | POS. 2 | POS. 3 |
|                 |        |        |
| ON              | NONE   | ON     |
| 2-1             | OPEN   | 2-3    |



**NOTE:**

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 2A @250VAC  
5A @120VAC OR 28 VDC
6. ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

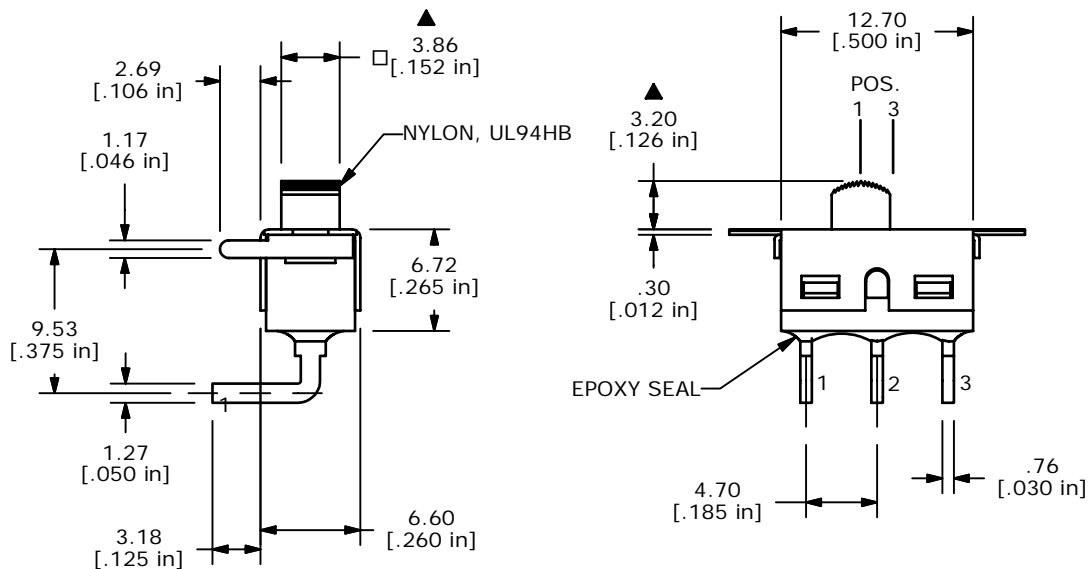

|     |        |                         |         |    |
|-----|--------|-------------------------|---------|----|
| B   | 15220  | CHANGES TO NOTE 5       | 9/1/05  | PH |
| A   | 15009  | RELEASED FOR PRODUCTION | 6/17/05 | JB |
| REV | PCR NO | DESCRIPTION             | DATE    | BY |

|                      |                |       |             |       |
|----------------------|----------------|-------|-------------|-------|
| TITLE 500SSP1S4M6QEB |                |       |             |       |
| SCALE 2:1            | DATE 6/17/2005 | DR JB | DWG T507001 | REV B |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED