

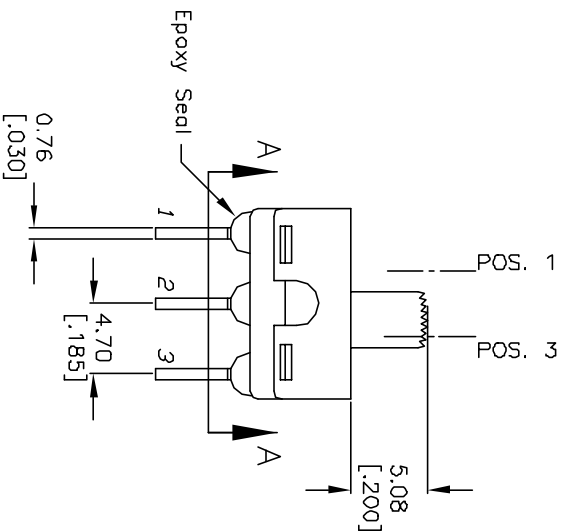


RECOMMENDED P.C.B. LAYOUT

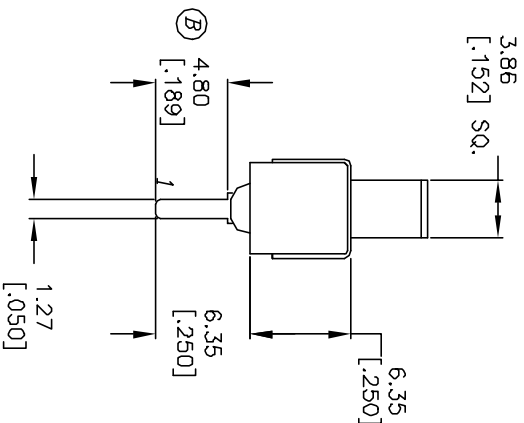

CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
(DN)	NONE	DN
2-1	OPEN	2-3

() = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) max. @20V max. (AC or DC)
5. CONTACT RESISTANCE: 10m ohm typical.
6. ELECTRICAL LIFE: 30,000 Actuations at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C.

REV.	ECN NO.	PART DESCRIPTION	DATE	CHKD
B	11545	SSP-3	6/19/01	CB

TITLE		SCALE	DATE	DR	DWG	REV
500 SSP-2 S1 M2 R E A		2:1	8/19/96	MM	T531001	B

E-SWITCH®

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED