




RECOMMENDED P.C.B. LAYOUT

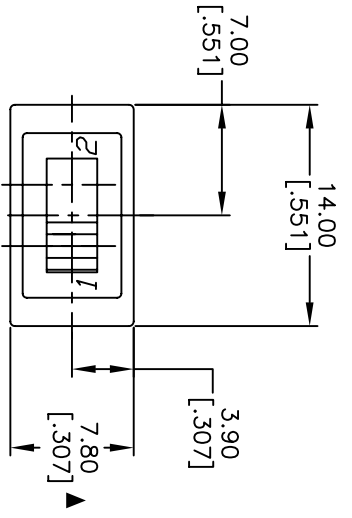

CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-1	N/A	2-3

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.XX=±0.4 X:XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. CONTACT RATING: 3A @ 120 VAC OR 28 VDC 1A @ 250 VAC
 5. FIXED TERM & MOVING CONTACT:
COPPER ALLOY W/SILVER PLATE
 6. CONTACT RESISTANCE: 10MΩ MAX
 7. MECHANICAL LIFE: 20,000 OPERATIONS
 8. INSULATION RESISTANCE: 1000 MΩ UNDER 500V
 9. OPERATING TEMP: -40°C TO 85°C
 10. BREAKING CAPACITY: 1A 30VDC
 11. ▲ DENOTES CRITICAL PARAMETER
 12. 2002/95/EC (ROHS) COMPLIANT

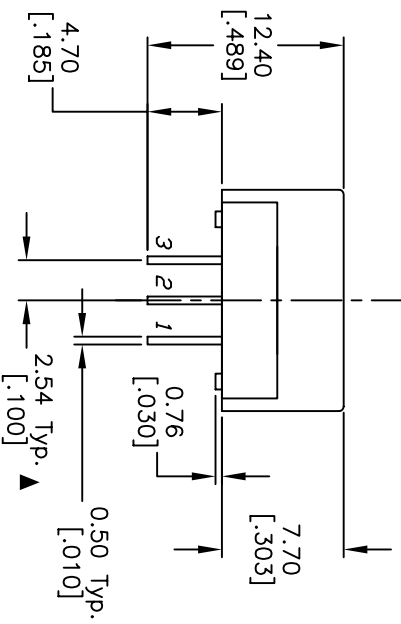

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
F	17384	Contact rating was 5A@120VAC	6/14/07	RC
E	17382	ADDED CENTERLINE DIMS	6/13/07	TN
D	16454	DIM. FROM '0.40' TO '0.76'	9/13/06	BD
C	15902	EDIT DIM, SWITCH FUNCTION	3/27/06	PH
B	11718	REVISED, AND REDRAWN	10/08/01	CJC

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

SCALE: 2:1

DATE: 6/13/07

DR: TN

DWG: T611005

REV: F

TITLE: 600SP1S1M1QE