



RECOMMENDED P.C.B. LAYOUT

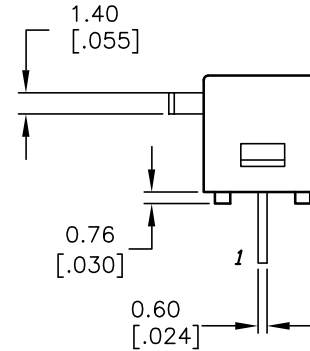

CIRCUIT: SPDT

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 0.4 VOLT-AMPS MAX. @20V MAX (AC OR DC)
5. FIXED TERM & MOVING CONTACT:  
▲ COPPER ALLOY W/GOLD PLATE
6. CONTACT RESISTANCE: 50MΩ MAX. INITIAL
7. MECHANICAL LIFE: 20,000 OPERATIONS
8. INSULATION RESISTANCE: 1000 MΩ MIN.
9. OPERATING TEMP: -40°C TO 80°C
10. BREAKING CAPACITY: 100 MILLIAMPS 30VDC
11. ▲ DENOTES CRITICAL PARAMETER.

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-1	OPEN	2-3

**E-SWITCH®**

TITLE				
600SP1S3M3RE				
SCALE	DATE	DR	DWG	REV
2:1	8/2/04	AR	T611011	A

A	14211	RELEASED FOR PRODUCTION	8/2/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED