

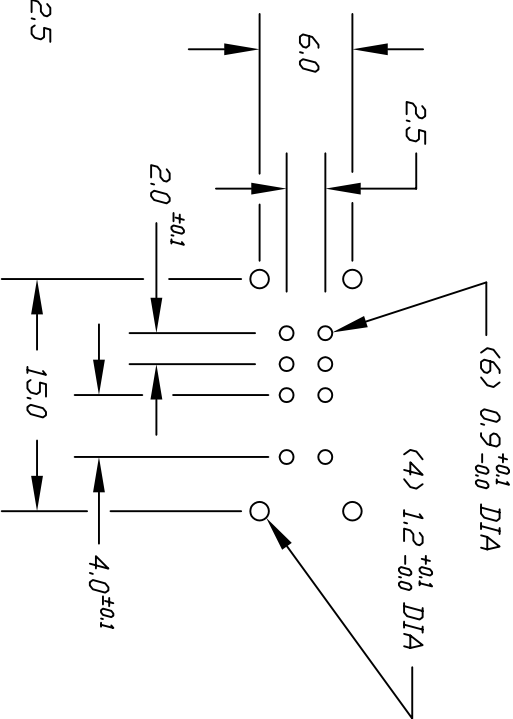
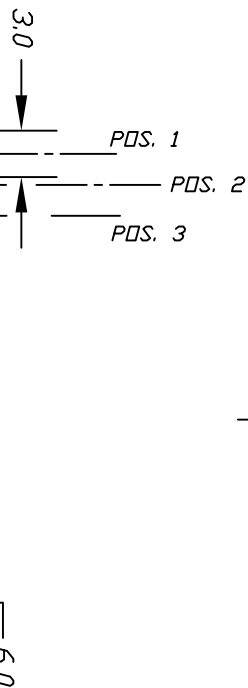



L → C → R: 300±100gf
L → C → R: 300±100gf

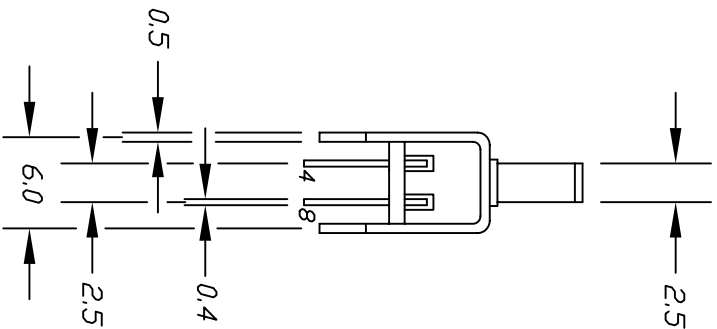

RECOMMEND P.C.B. HOLES

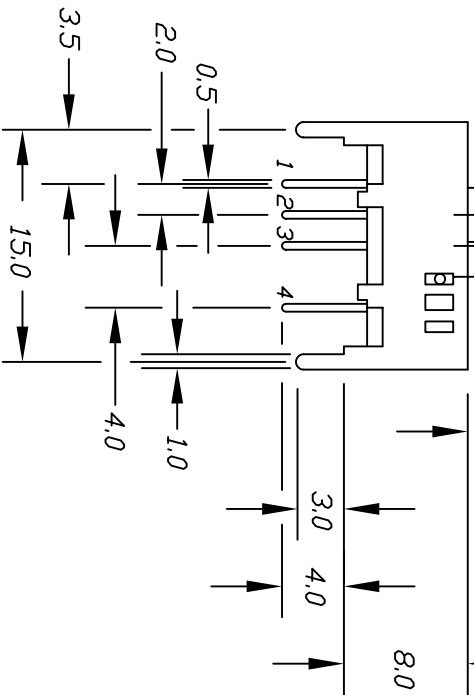

CIRCUIT: DP3T

CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
3-1	3-2	3-4	
7-5	7-6	7-8	

NOTES:

1. ALL DIMENSIONS IN MM [IN]
2. TERM. NOS. FOR REF ONLY
3. RATING: DC 30V, 0.2A
4. TRAVEL: 2.0mm TYP.
5. INITIAL CONTACT RESISTANCE: 20 milliohms typ.
6. LIFE CYCLE @FULL LOAD: 10,000 Cycles Typ.
7. DWV: 500VAC Terminal To Ground.

E-SWITCH®

6. LIFE CYCLE 20,000 10,000 Cycles Typ.			
7. DWG: 500VAC Terminal To Ground.			
C	REVISED & REDRAWN		
REV.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
TOLERANCES			
0.0	±0.4		
0.00	±0.25		
TITLE			
EG 2301A DP3T-Non-Specified			
SCALE	DATE	DR	DWG
2:1	5/11/94	MM	P040181
			REV
			C