


RECOMMENDED P.C.B. LAYOUT






CONTACT CONFIGURATION

DPDT


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NONE	DN
2-1,5-4	DPEN	2-3,5-6

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 0.4VA@20V (AC OR DC)
5. FIXED AND MOVING: COPPER ALLOY W/ GOLD PLATE OVER NICKEL PLATE
6. CONTACT RESISTANCE: 10mΩ TYP
7. INSULATION RESISTANCE: 1,000 MΩ min.
8. ELECTRICAL LIFE: 30,000 ACTUATIONS @ FULL LOAD
9. OPERATING TEMP: -30°C TO 85°C
10. TRAVEL: 2.16 MM
11. DIELECTRIC STRENGTH: 1,000 V RMS@SEA LEVEL

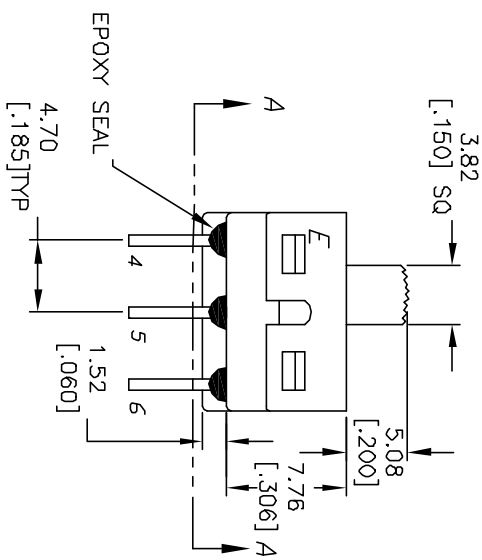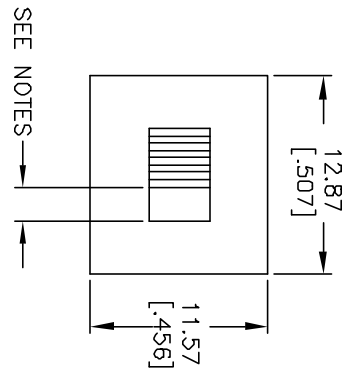

VIEW A-A

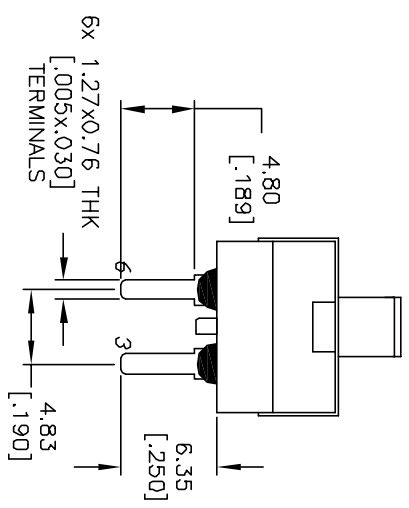

REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
B	11817	REVISED, AND REDRAWN	11/05/01	CJC	2:1	11/05/01	CJC	T521003	B
TITLE					500 SDP-1 S1 M2 R E A				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED					E-SWITCH®				