


HONEYWELL PART NUMBER
12SM4 - T
PRODUCT CODE
TXA0460
JG-80587

REV	DOCUMENT	CHANGED BY	CHECK
7	0038111	PK 20MAY08	ASD

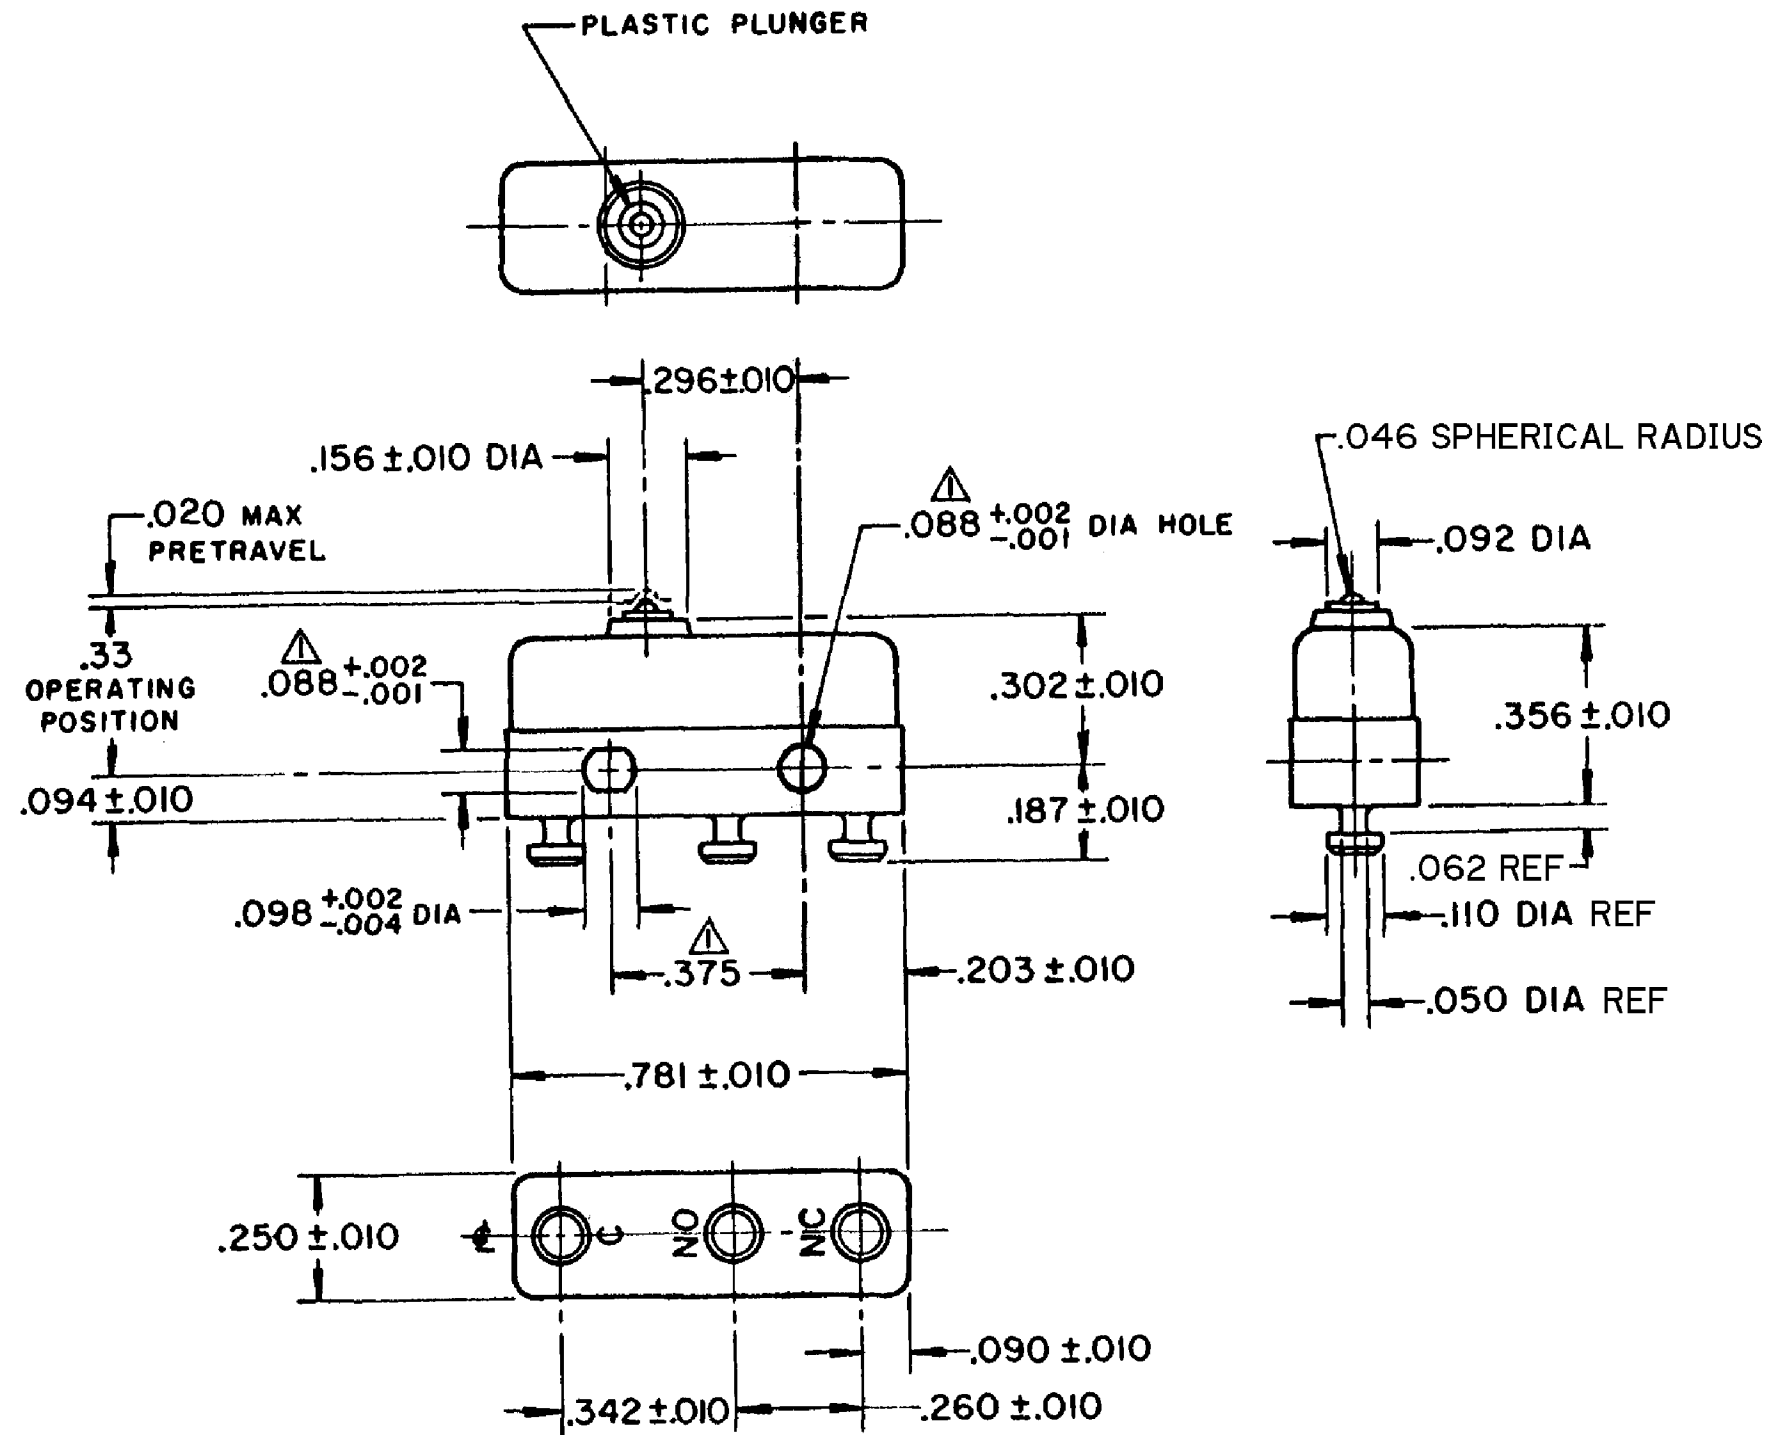

NOTE -
 ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 \pm .002 CENTERS
 2-TERMINALS ARE PLATED FOR SOLDERING
 3-SWITCH WILL WITHSTAND TEMPERATURE OF 250°
 4-CONTACT MATERIAL 24K GOLD PLATED

RELEASE NO.	ET S SR 9650
REPLACES	-

CHARACTERISTICS	
OPERATING FORCE - - - -	3 - 5 OZ
RELEASE FORCE - - - - -	1 OZ MIN
DIFFERENTIAL TRAVEL - - -	.004 MAX
OVERTRAVEL - - - - -	.003 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
30 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	1/2 AMP	1/2 AMP
RESISTIVE	1 AMP	1 AMP
MAXIMUM INRUSH 2 AMP		
APPROVALS	KEMA, CE	1A, 250V ~ T85 1E4
	UL, CSA	1A, 125 VAC
		CE
		UL
		BRAND L22

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X \pm
ONE PLACE .X \pm
TWO PLACE .XX \pm
THREE PLACE .XXX \pm
FOUR PLACE .XXXX \pm
ANGLES \pm
THIRD ANGLE PROJECTION

DRAWN	VK	17OCT07
CHECK	RJ	17OCT07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	12SM4-T	7
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1