
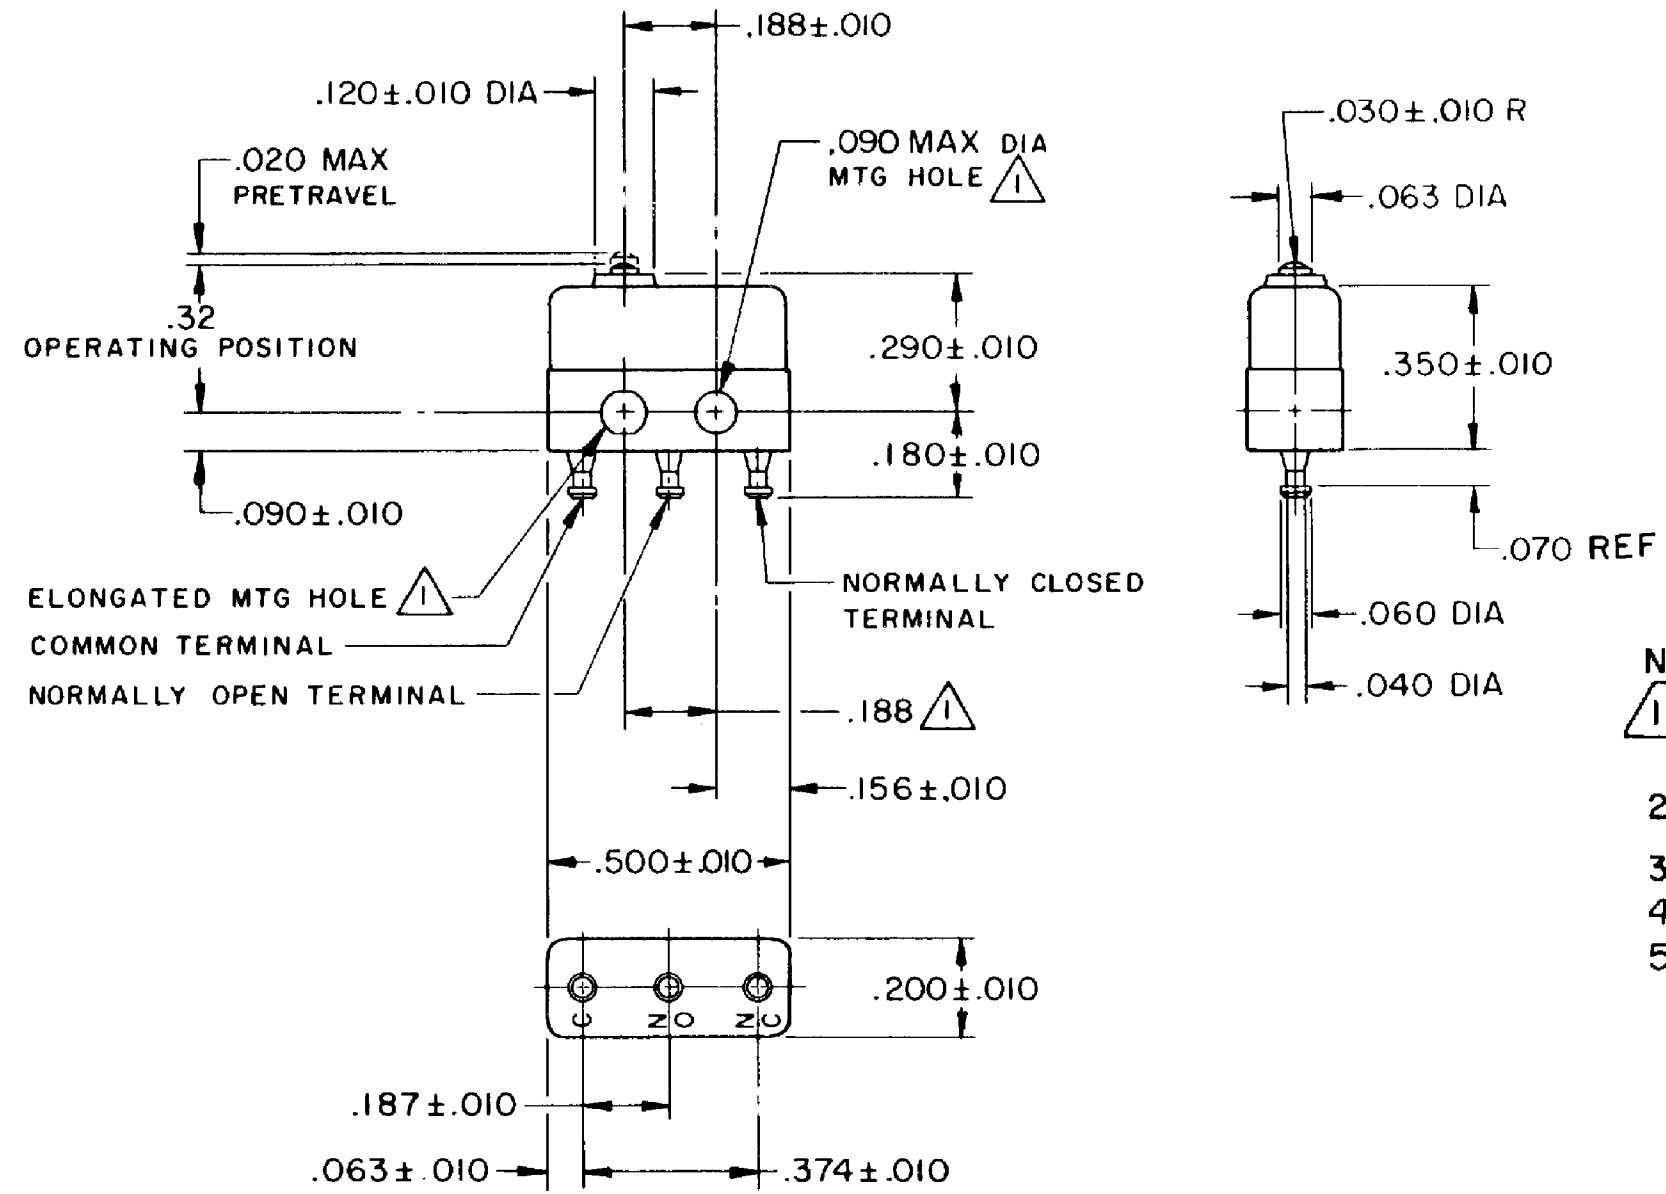


HONEYWELL PART NUMBER
12SX3-T
PRODUCT CODE VDK1075

REV	DOCUMENT	CHANGED BY	CHECK
11	0038449	VS 28APR08	BLR

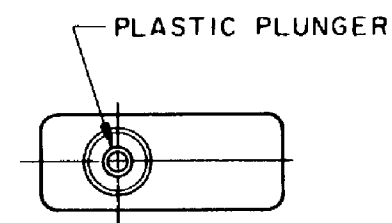

- NOTES**
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
  - 2 - TERMINALS ARE SOLDER DIPPED WITH RoHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
  - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
  - 4 - MOVABLE CONTACT MATERIAL - 24K SOLID GOLD
  - 5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR-1410
REPLACES	

**CHARACTERISTICS**

OPERATING FORCE -- 2.5 - 5 OZ MAX

RELEASE FORCE -- 1 OZ MIN

DIFFERENTIAL TRAVEL -- .001 MAX

OVERTRAVEL -- .004 MIN

**ELECTRICAL DATA**

CONTACT ARRANGEMENT  
SPDT

28 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	.010 AMP	
RESISTIVE	.010 AMP	

APPROVALS

KEMA, CE	1A 250 V - T125 25E3	UL, CSA	1A 125 VAC
----------	----------------------	---------	------------

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION

DRAWN	SPK	13FEB08
CHECK	RJ	13FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

**Honeywell**

TITLE: SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	12SX3-T	11
SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1