
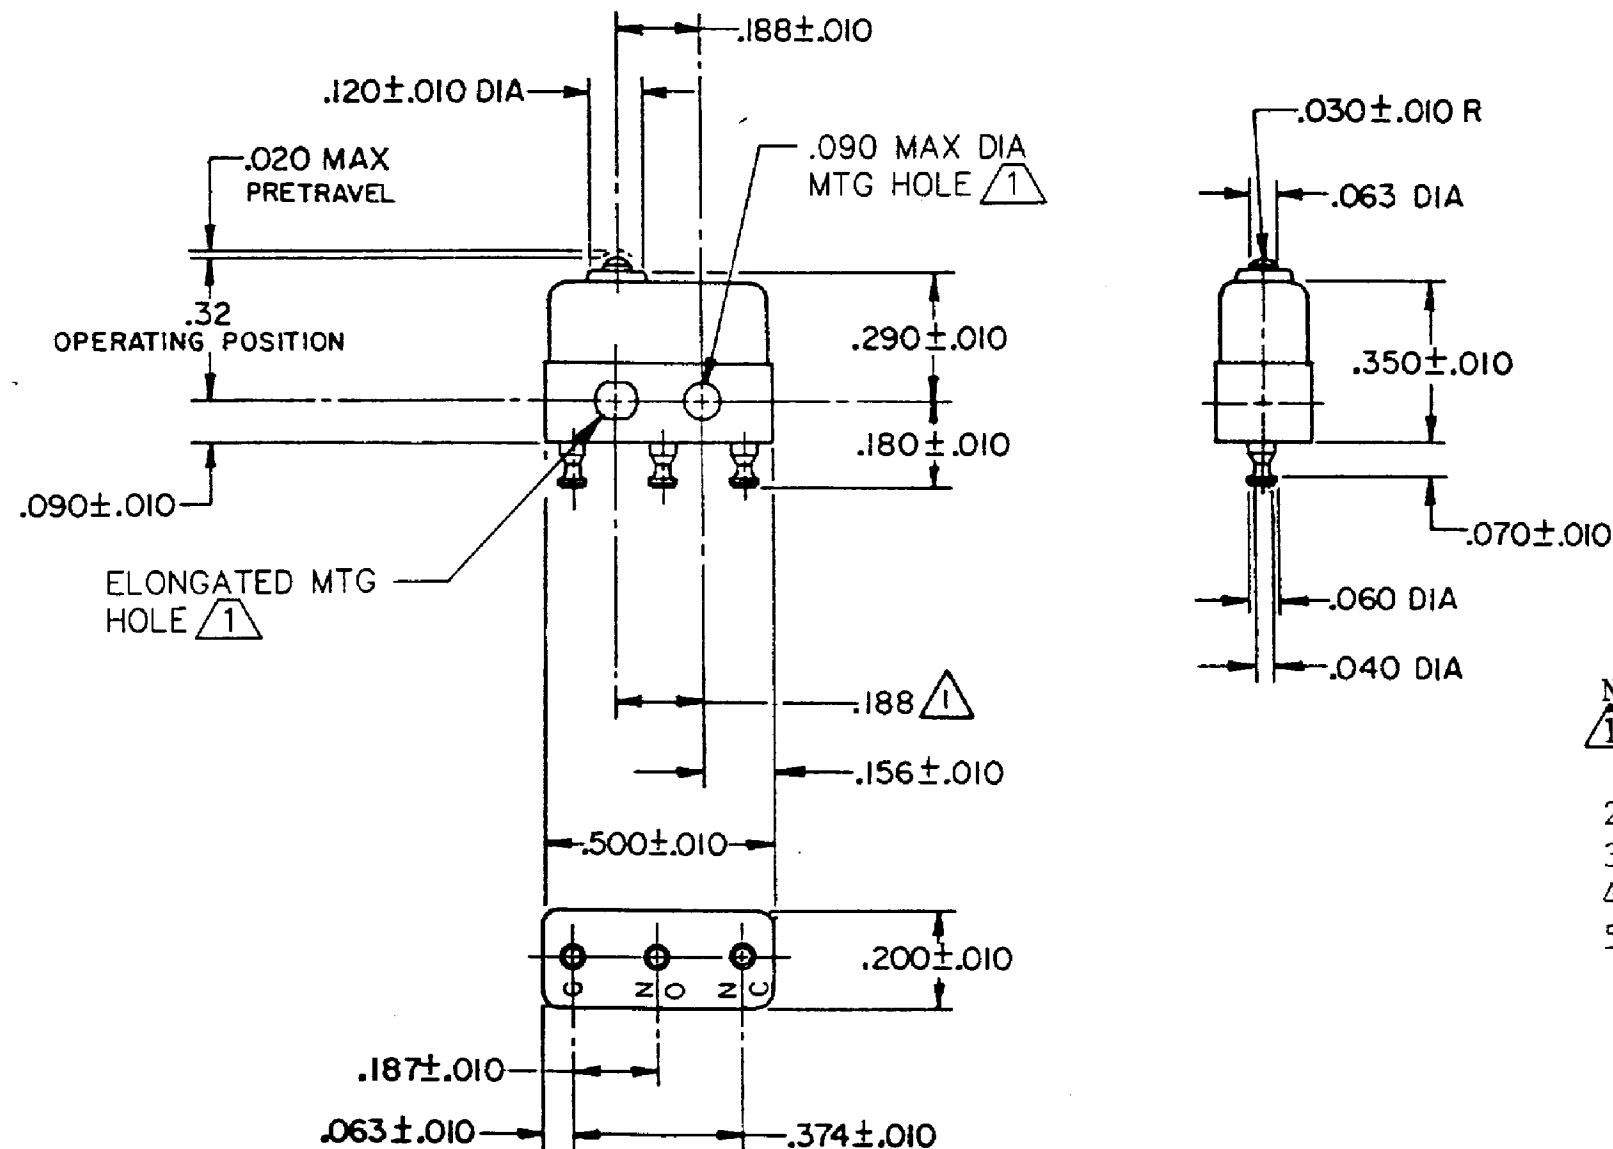


HONEYWELL PART NUMBER
413SX21-T
PRODUCT CODE VDX1321
MILITARY PART NUMBER M8805/106-02

REV	DOCUMENT	CHANGED BY	CHECK
3	0038558	SS 08MAY08	BLR



- NOTES**
- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
  - TERMINALS ARE PLATED FOR SOLDERING
  - SWITCH WILL WITHSTAND TEMPERATURE OF 400°F
  - MOVABLE CONTACT MATERIAL - 24K SOLID GOLD OVERLAY
  - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR-10353
REPLACES	

**CHARACTERISTICS**

OPERATING FORCE ----- 5 OZ MAX

RELEASE FORCE ----- 1 OZ MIN

DIFFERENTIAL TRAVEL -- .002 MAX

OVERTRAVEL ----- .004 MIN

**ELECTRICAL DATA**

CONTACT ARRANGEMENT  
SPDT

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

0.030  
0.015  
0.005

DRAWN	SPK	29FEB08
CHECK	RJ	29FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

<b>Honeywell</b>			
TITLE <b>SWITCH - BASIC</b>			
SIZE	TYPE	DRAWING NAME	REV
<b>B</b>	<b>I</b>	<b>413SX21-T</b>	<b>3</b>
SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1

APPROVALS

MILITARY	M8805/106-02	BRAND
----------	--------------	-------

