



HONEYWELL PART NUMBER
11SM23-T
PRODUCT CODE
TWT2360
JG-80220

REV	DOCUMENT	CHANGED BY	CHECK
7	0038091	VS 28APR08	BLR

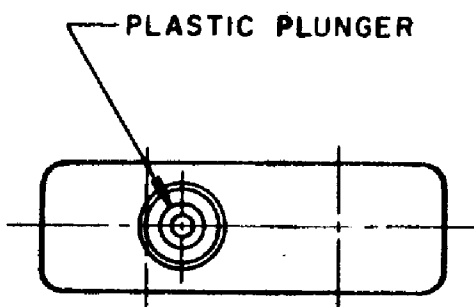

PLASTIC PLUNGER

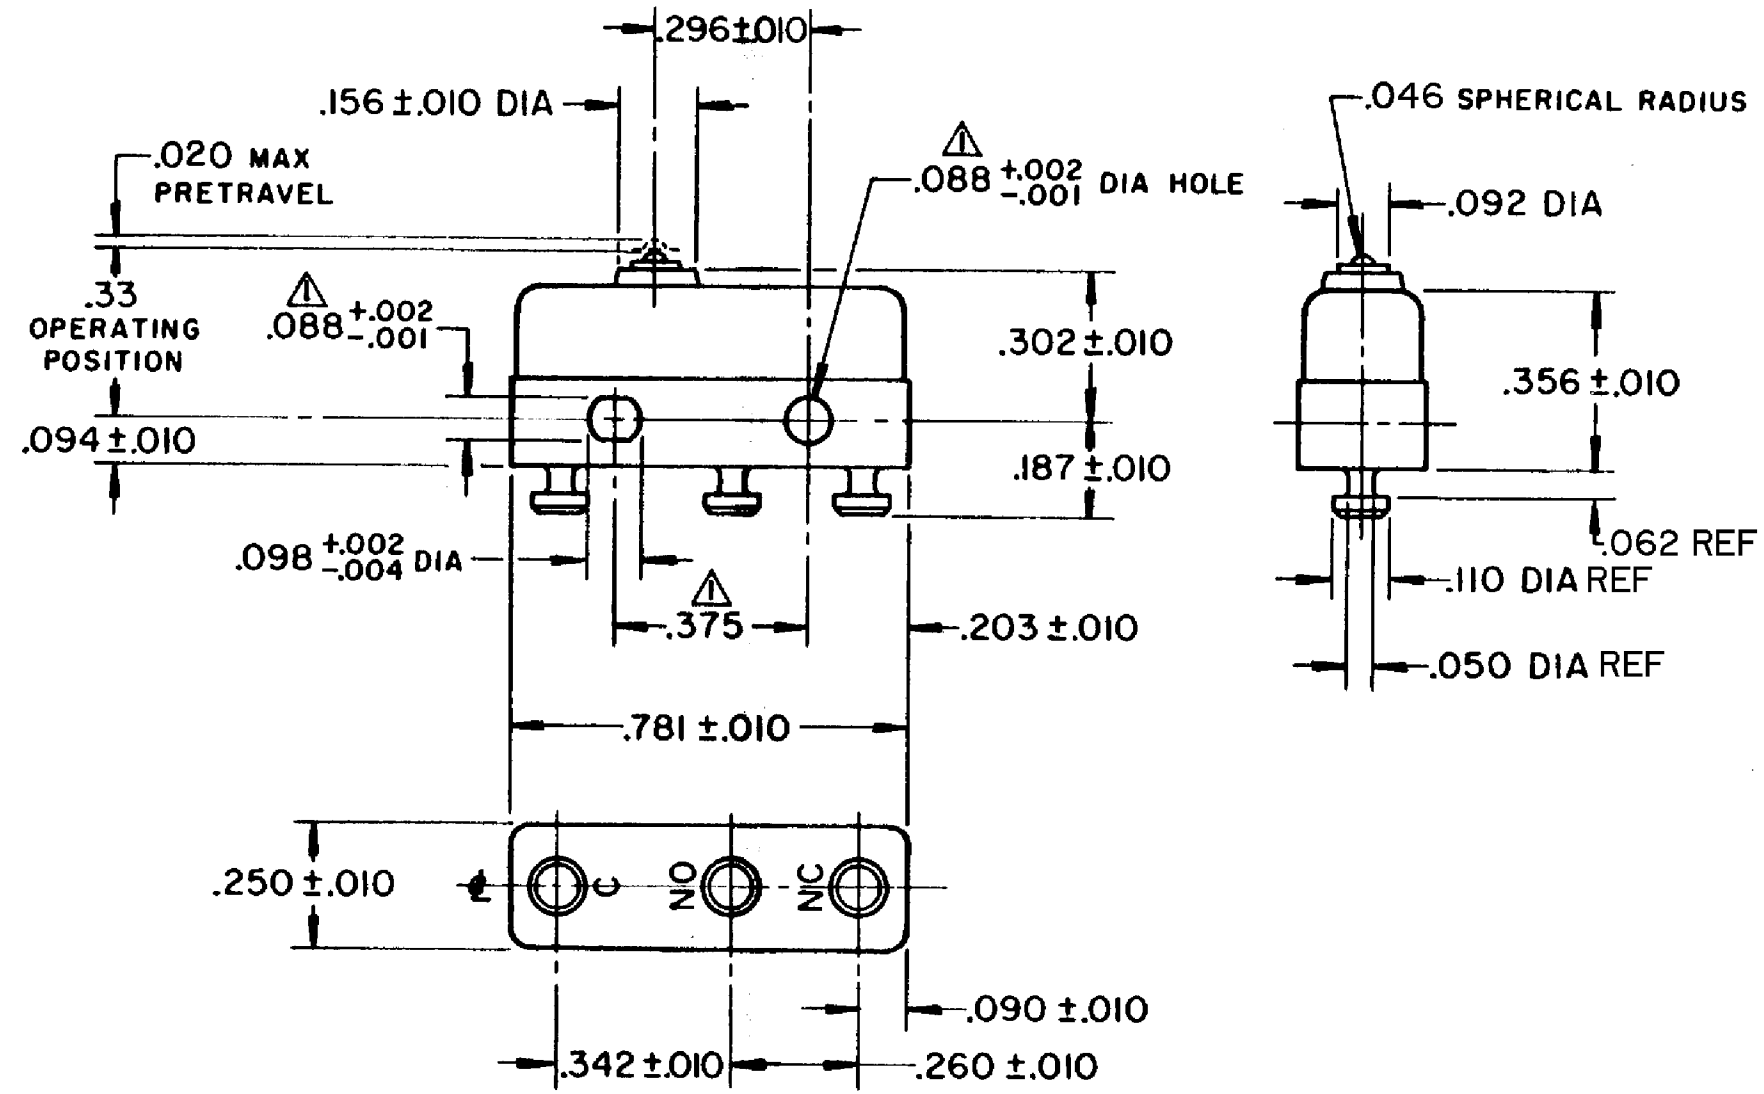

**NOTE -**  
 ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS  
 2-TERMINALS ARE PLATED FOR SOLDERING  
 3-MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO.	-
REPLACES	-

**CHARACTERISTICS**

OPERATING FORCE - - - - 3-5 OZ

RELEASE FORCE - - - - 1 OZ MIN

DIFFERENTIAL TRAVEL - - - .004 MAX

OVERTRAVEL - - - - - .005 MIN

**ELECTRICAL DATA**

CONTACT ARRANGEMENT  
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	1/2 AMP	1/2 AMP
RESISTIVE	1 AMP	1 AMP

MAXIMUM INRUSH 2 AMP

APPROVALS

KEMA, CE	1A, 250V ~ T85 1E4	CE
UL, CSA	1A, 125 VAC	UL, CSA

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION

DRAWN	VK	27 NOV 07
CHECK	RJ	27 NOV 07

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

RASTER

**Honeywell**

TITLE  
**SWITCH - BASIC**

SIZE	TYPE	DRAWING NAME	REV
<b>B</b>	<b>I</b>	<b>11SM23-T</b>	<b>7</b>

SCALE - WEIGHT .006 LB MAX SHEET 1 OF 1