
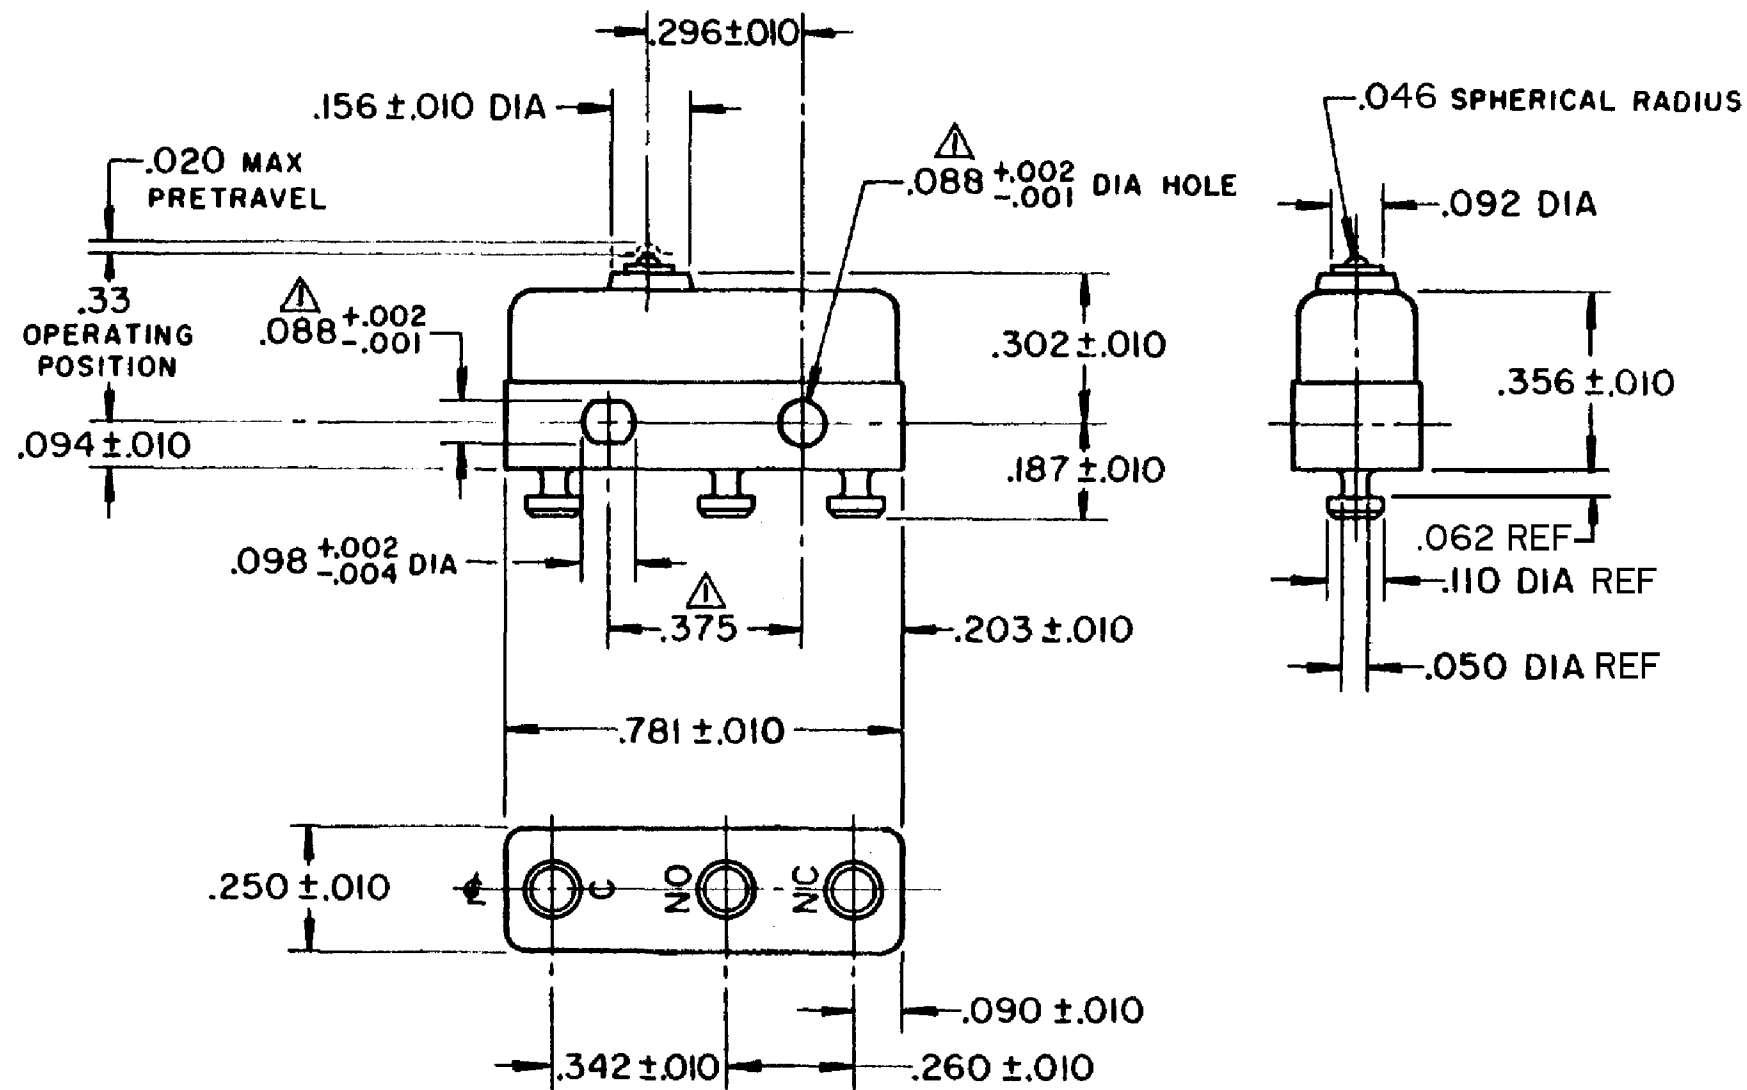


HONEYWELL PART NUMBER
11SM401-T
PRODUCT CODE TWY0160

REV	DOCUMENT	CHANGED BY	CHECK
8	0038104	PK 23APR08	ASD

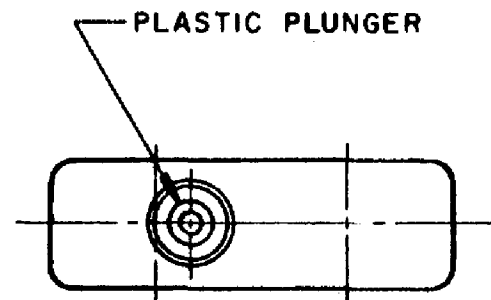

NOTES

- ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
- 2-TERMINALS ARE PLATED FOR SOLDERING
- 3-DEAD BREAK CONDITIONS:
- A-MAX AMOUNT PERMISSIBLE— —.0002 IN

RELEASE NO.	SR - 9889
REPLACES	-

CHARACTERISTICS

OPERATING FORCE — — — 3 1/2 OZ MAX

RELEASE FORCE — — — — 1 OZ MIN

DIFFERENTIAL TRAVEL — — — .001 MAX

OVERTRAVEL — — — — — .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS

KEMA, CE	5A, 250V ~ T85 1E4	CE
UL, CSA	5A, 250 VAC	UL BRAND L4

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±	
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	
ANGLES		±	

THIRD ANGLE PROJECTION

DRAWN	VK	27 NOV 07
CHECK	RJ	27 NOV 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell

TITLE: SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	11SM401-T	8
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1