

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH-BASIC

CATALOG LISTING


V7-1A17D8-048

CW-B0262

CATALOG LISTING
V7-1A17D8-048
PAGE 1 OF 1
RELEASE NO. PR-20343
REPLACES
ISSUE
2

REVISIONS
A CO 78754
DCS
15 JUL 94


DDM/CAD
DRAWN
D H D 9 OCT 92
CHECK
JAL
16 OCT 92
CHECK

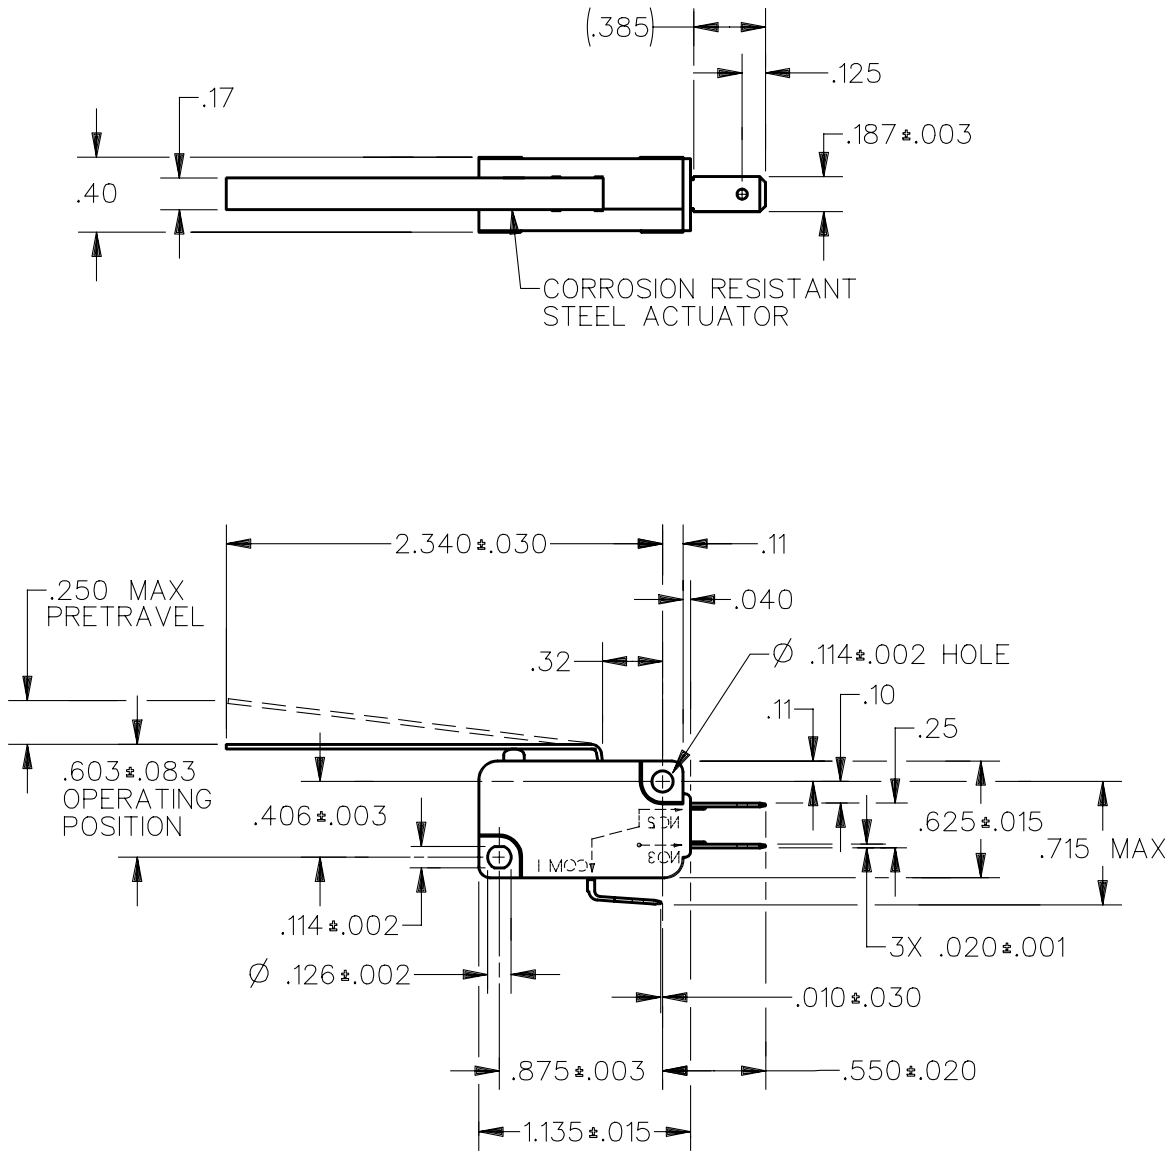

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 46 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± WEIGHT	
RELEASE FORCE — — — 4 GRAMS MIN	L162 5A 125, 250, 277 VAC 1/10HP 250 VAC		
DIFFERENTIAL TRAVEL — — — .054 MAX			
OVERTRAVEL — — — — .124 MIN			
RELEASE TRAVEL — — — — .030 MIN			