MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V7–1B17D8–048

CW–B4715

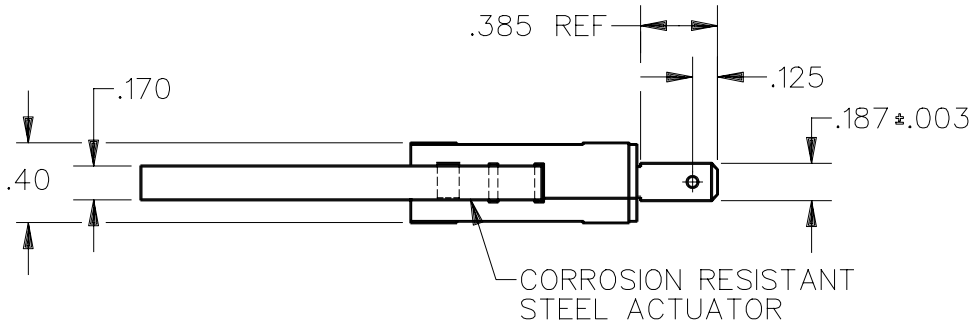

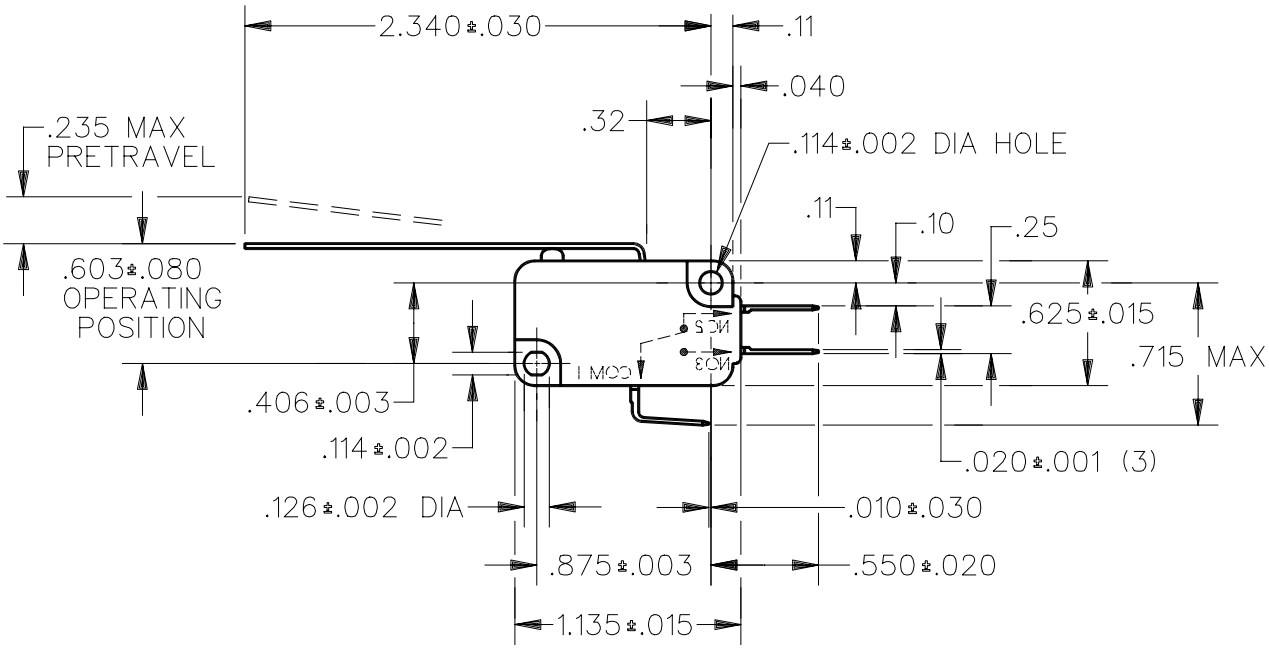

NOTES
1 – CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING 5 LBS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	
OPERATING FORCE	50 GRAMS MAX
RELEASE FORCE	4 GRAMS MIN
DIFFERENTIAL TRAVEL	.050 MAX
OVERTRAVEL	.115 MIN
RELEASE TRAVEL	.030 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L156 11A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

CATALOG LISTING V7–1B17D8–048
ISSUE 4 M
REPLACES
RELEASE NO. PR–18877

REVISIONS

A	REL DWG PR18877	WJC 7 DEC 90
B	CO–70577	BAB 25 JUL 91
C	CO–76109	JWB 8 NOV 93

CHECK
CHECK
10 DEC 90 JAP
CHECK
7 DEC 90 WJC
DRAWN
DDM/CAD