


HONEYWELL  
PART NUMBER

REV	DOCUMENT	CHANGED BY	CHECK
6	0041135	VS 26JUN08	BLR

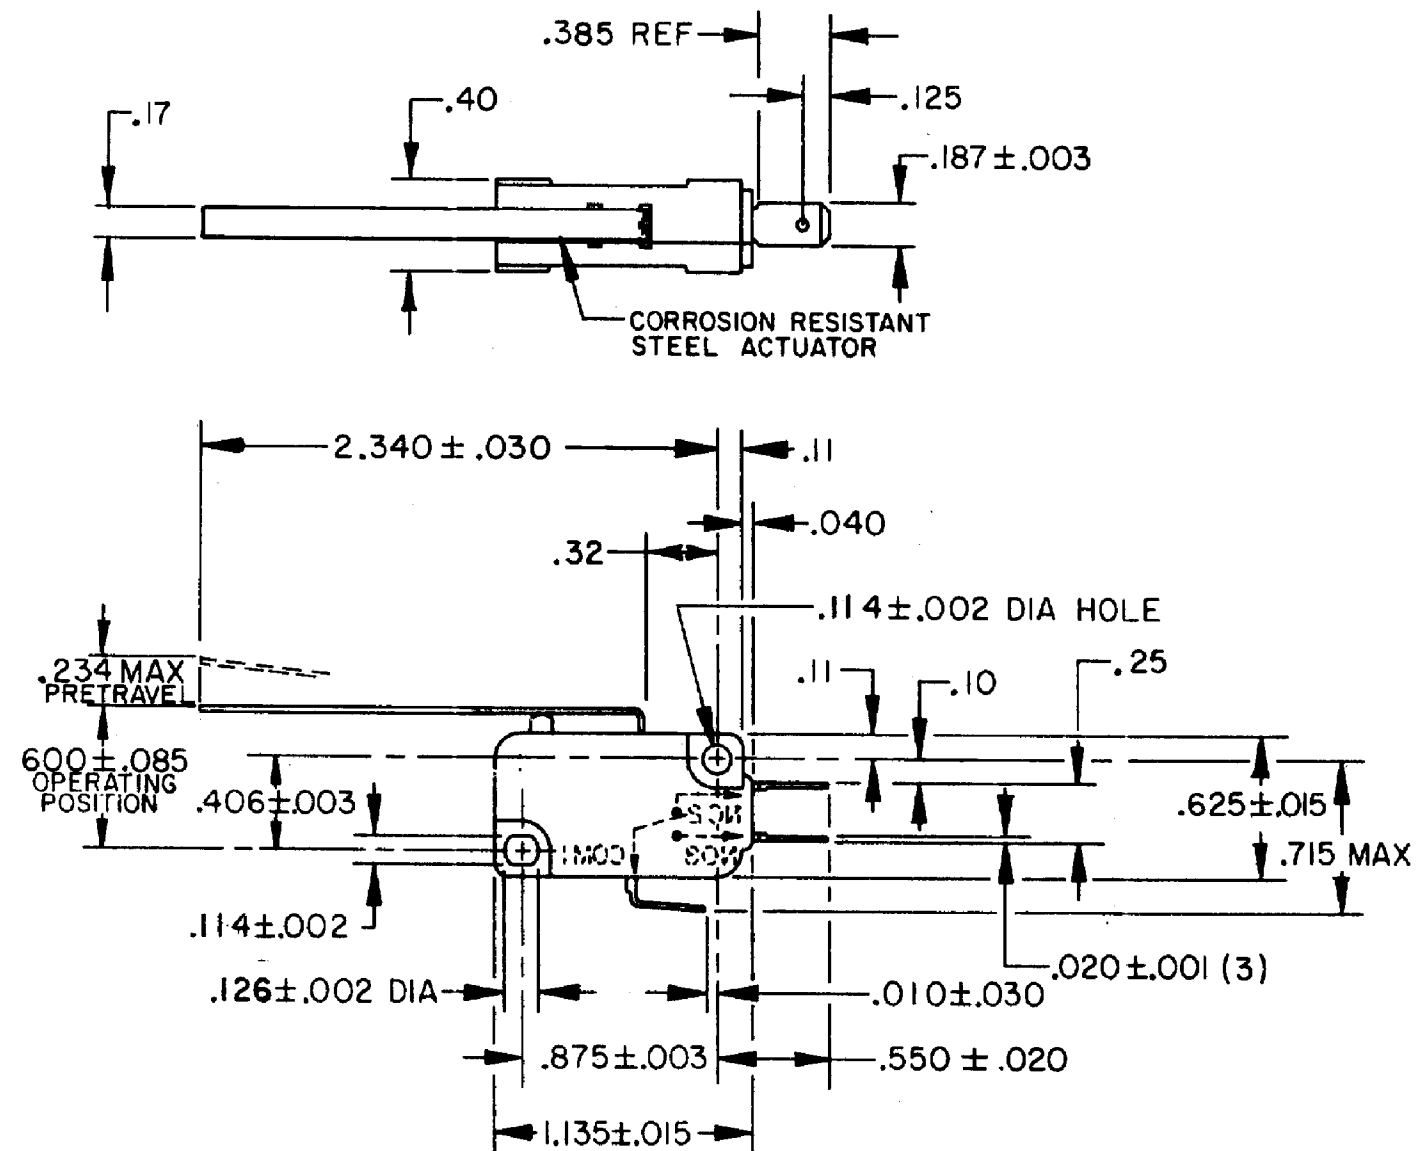

RELEASE NO	CATALOG LISTING
PR-16322	V7-1C17D8-048
	CW-B1620

CHARACTERISTICS	
OPERATING FORCE-----	45 GRAMS MAX
RELEASE FORCE-----	5 GRAMS MIN
DIFFERENTIAL TRAVEL-----	.060 MAX
OVERTRAVEL-----	.165 MIN
RELEASE TRAVEL-----	.030 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT	
S P D T	
L215	
15.1A 1/2HP 125, 250, 277 VAC	
1/2A 125 VDC	
1/4A 250 VDC; 5A 125 VAC "L"	

DESIGN UNITS: INCH  
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	.030
TWO PLACE	.XX	±	.015
THREE PLACE	.XXX	±	.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-

THIRD ANGLE PROJECTION

DRAWN	JAP	28MAR88
CHECK	DCS	28SEP89
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

<b>Honeywell</b>			
TITLE <b>SWITCH, BASIC</b>			
SIZE	DWG TYPE	DRAWING NAME	REV
<b>B</b>	<b>I</b>	<b>V7-1C17D8-048</b>	<b>6</b>
SCALE	WEIGHT	SHEET	OF
-		1	1