


HONEYWELL  
PART NUMBER

-

REV	DOCUMENT	CHANGED BY	CHECK
4	0041135	VS 26JUN08	BLR

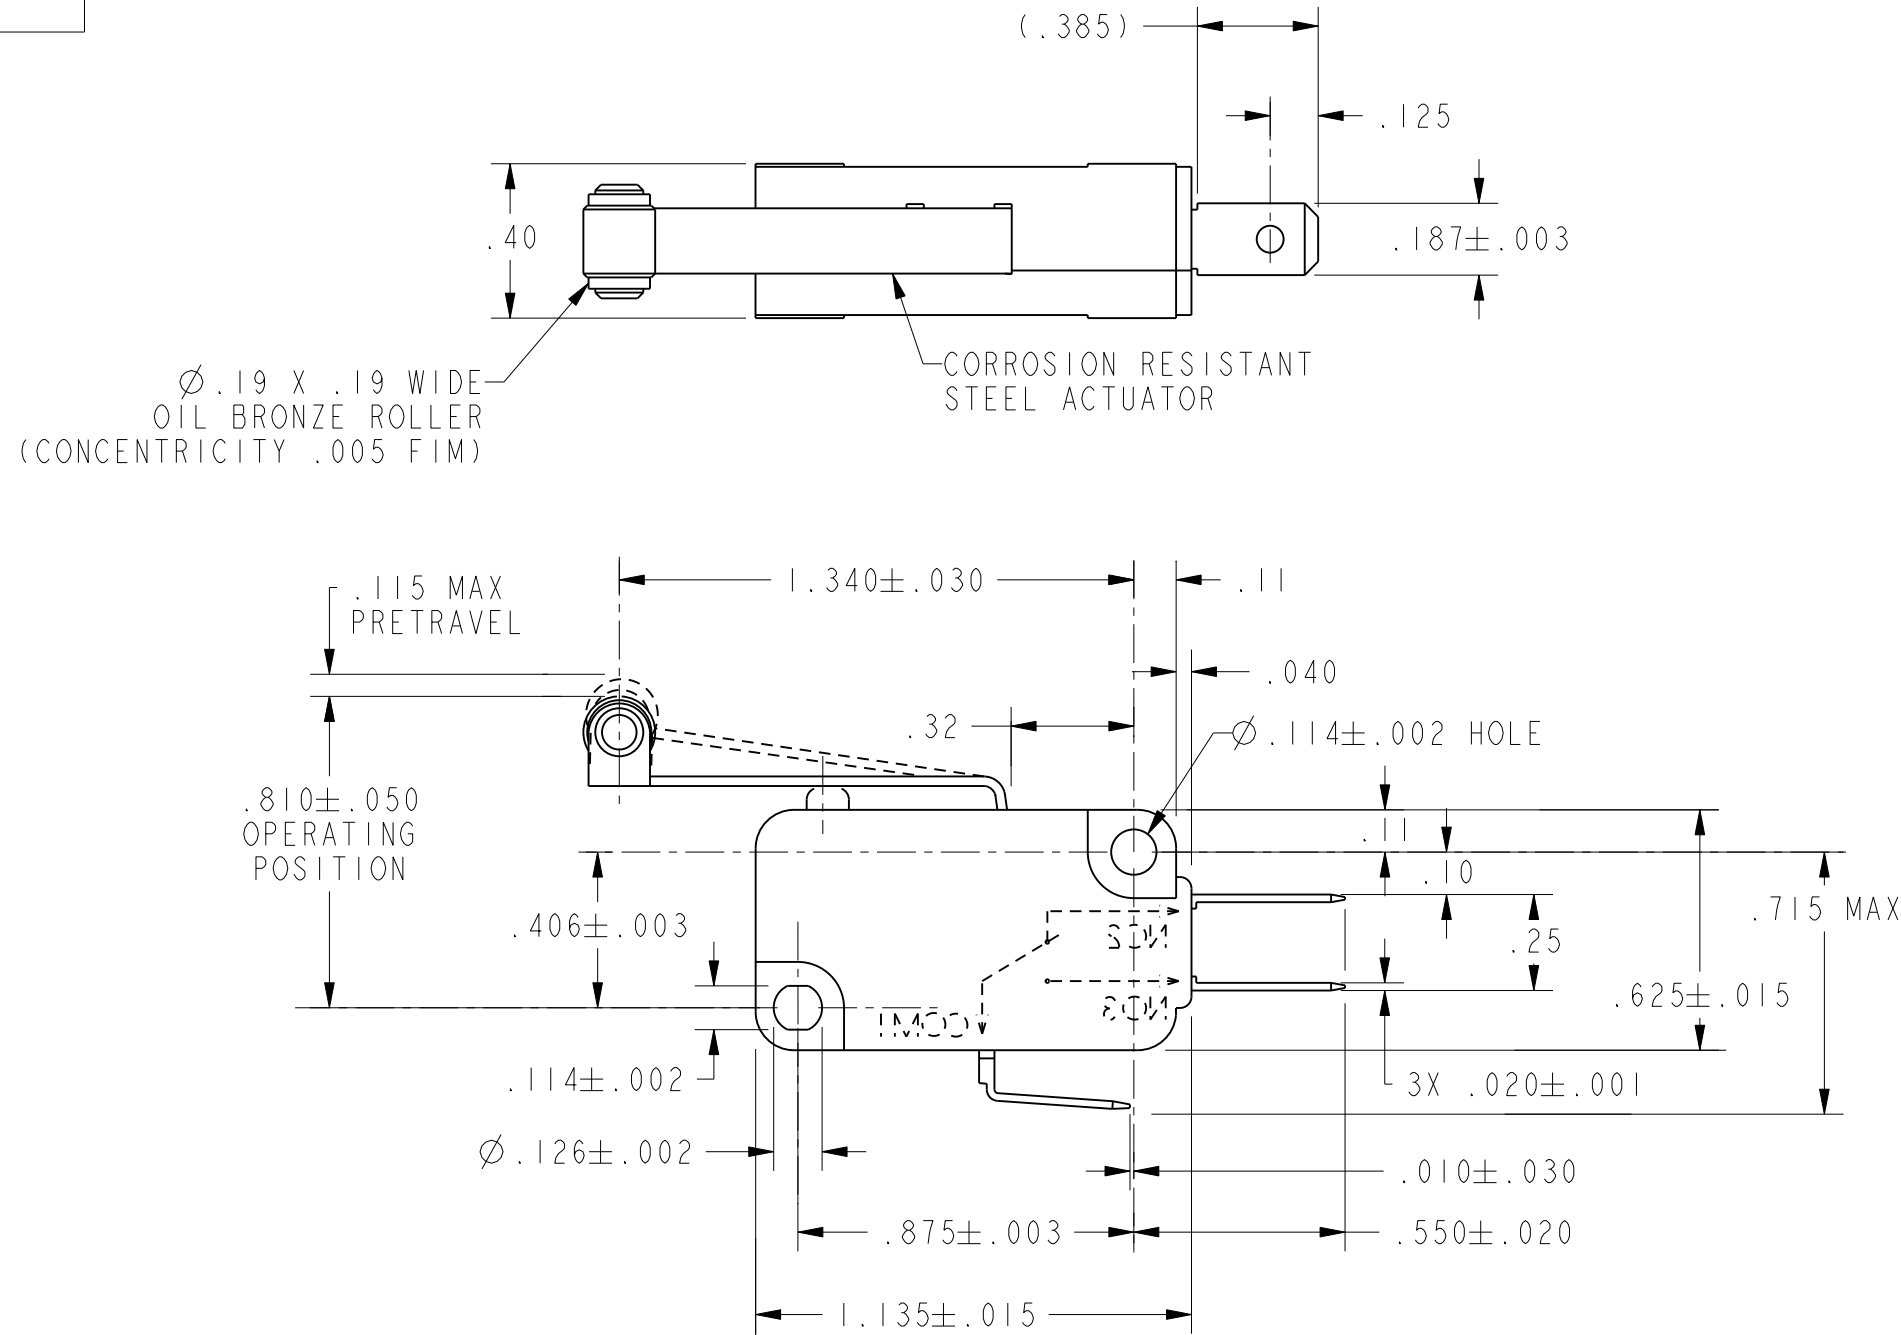

RELEASE NO	CATALOG LISTING
PR-18883	V7-1C17D8-207
	CW-B5419

<p>CHARACTERISTICS</p> <p>OPERATING FORCE-----90 GRAMS MAX</p> <p>RELEASE FORCE ----- 9 GRAMS MIN</p> <p>DIFFERENTIAL TRAVEL-----.025 MAX</p> <p>OVERTRAVEL-----.060 MIN</p> <p>RELEASE TRAVEL-----.016 MIN</p>		<p>ELECTRICAL DATA</p> <p>CONTACT ARRANGEMENT S P D T</p> <p>L215</p> <p>15.1A 1/2HP 125, 250 OR 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 5A 125 VAC "L"</p>		<p>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:</p> <table border="0"> <tr> <td>NO PLACE</td> <td>X</td> <td>±.040</td> <td>±1</td> </tr> <tr> <td>ONE PLACE</td> <td>.X</td> <td>±.030</td> <td>±0,4</td> </tr> <tr> <td>TWO PLACE</td> <td>.XX</td> <td>±.015</td> <td>±0,15</td> </tr> <tr> <td>THREE PLACE</td> <td>.XXX</td> <td>±.005</td> <td>±</td> </tr> <tr> <td>ANGLES</td> <td></td> <td>±</td> <td>±</td> </tr> <tr> <td>RAW MATERIAL-COMMERCIAL STANDARD</td> <td></td> <td></td> <td></td> </tr> </table> <p>THIRD ANGLE PROJECTION</p>		NO PLACE	X	±.040	±1	ONE PLACE	.X	±.030	±0,4	TWO PLACE	.XX	±.015	±0,15	THREE PLACE	.XXX	±.005	±	ANGLES		±	±	RAW MATERIAL-COMMERCIAL STANDARD				<p>DRAWN BAB 14DEC90</p> <p>CHECK WJC 31DEC90</p> <p>THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.</p> <p>DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED</p> <p>PTC 2D ASME Y14.5M-1994</p>		<p><b>Honeywell</b></p> <p>TITLE SWITCH, BASIC</p> <p>SIZE B DWG TYPE I DRAWING NAME V7-1C17D8-207 REV 4</p> <p>SCALE NONE WEIGHT SHEET 1 OF 1</p>			
NO PLACE	X	±.040	±1																																
ONE PLACE	.X	±.030	±0,4																																
TWO PLACE	.XX	±.015	±0,15																																
THREE PLACE	.XXX	±.005	±																																
ANGLES		±	±																																
RAW MATERIAL-COMMERCIAL STANDARD																																			