

X88590 - V7

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V7-5F17D8-336

CW-C5007

V7-5F17D8-336

CATALOG LISTING

REPLACES
PAGE 1 OF 1
RELEASE NO. PR-17737



ISSUE
3

REVISIONS

A	CO-94018
	GRT
	27 SEP 99

CHECK

CHECK


27SEP99

SAV

CHECK

27SEP99

GRT

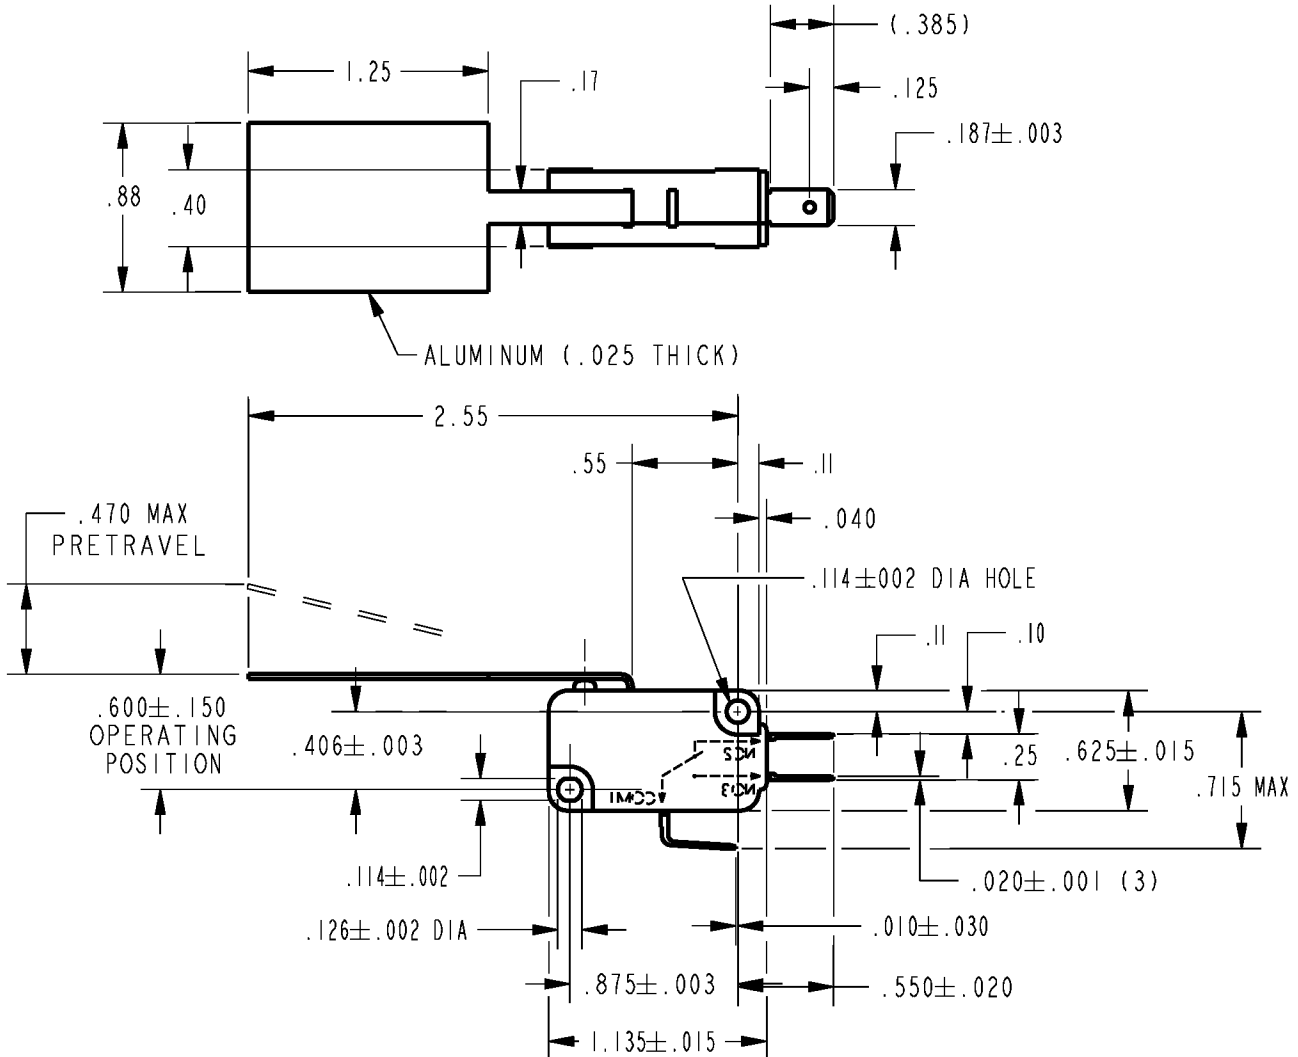


NOTES

- 1 ALL CHARACTERISTICS TAKEN WITH SWITCH MOUNTING SURFACE HORIZONTAL
- 2 - THE MASS OF THE LEVER MAY PREVENT PLUNGER FROM RETURNING THE LEVER TO FREE POSITION
- 3 - CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING ONE OUNCE

~~ANSI Y14.5M 1982 APPLIES~~

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS

OPERATING FORCE	— — 2.3 GRAM MAX
DIFFERENTIAL TRAVEL	— — .100 MAX
OVERTRAVEL	— — .300 MIN
RELEASE TRAVEL	— — .056 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

3A 125, 250, 277 VAC LI63
1/10HP 250 VAC

SCALE FULL DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE (.0)	±.030	
TWO PLACE (.00)	±.015	
THREE PLACE (.000)	±.005	
ANGLES	±	
WEIGHT		



PTC/CAD 2D

DRAWN

GRT