MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BA-2RV22

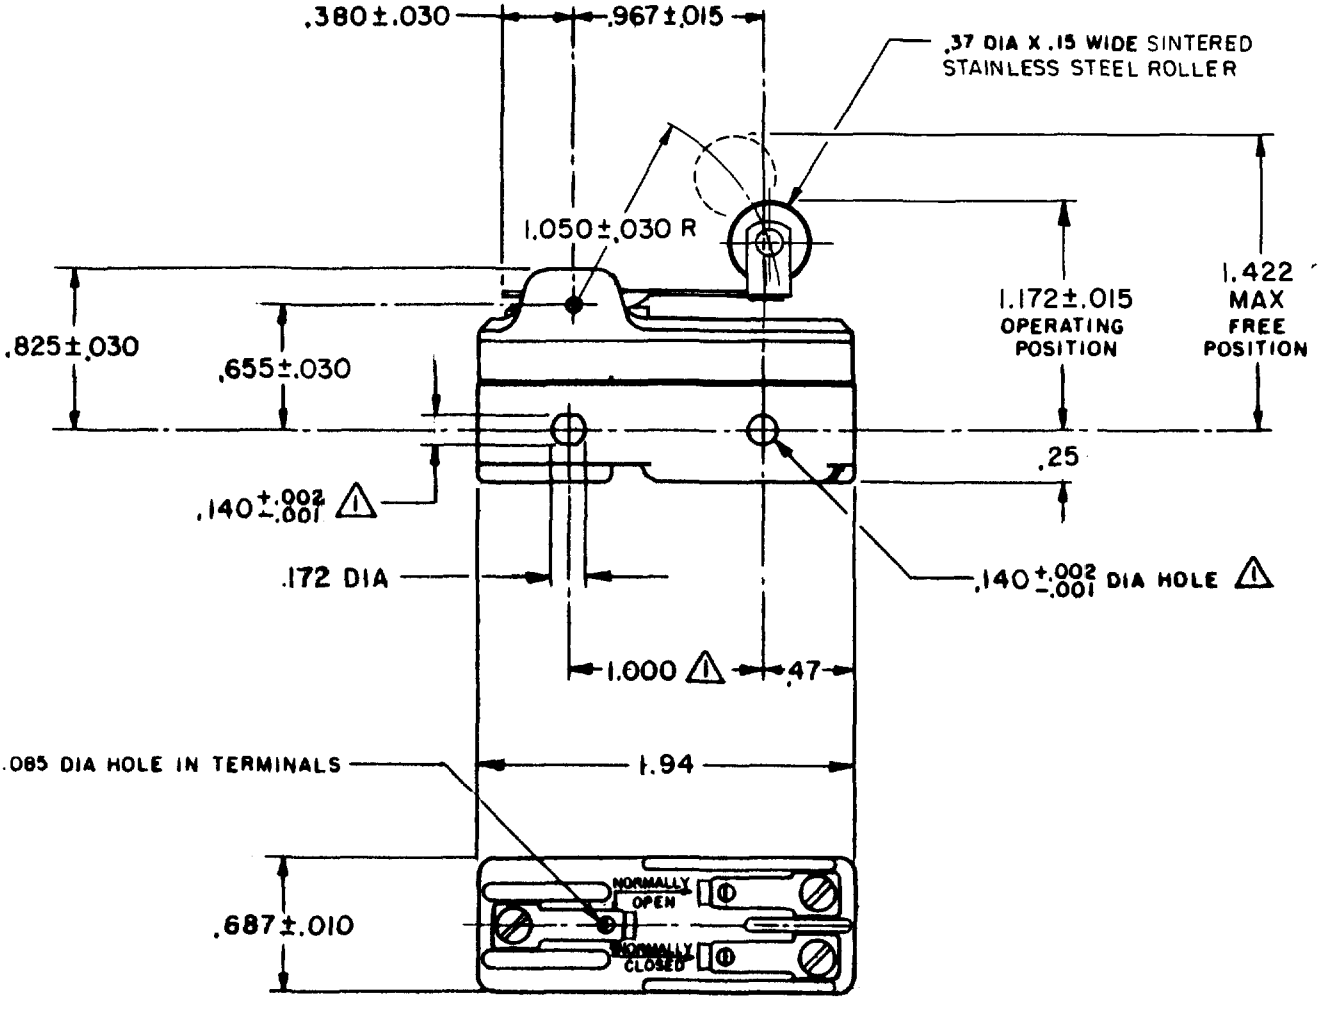

NOTE
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	6 OZ MAX
RELEASE FORCE	1 1/2 OZ MIN
PRETRAVEL	.250 MAX
DIFFERENTIAL TRAVEL	.045 MAX
OVERTRAVEL	.030 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L23 — UNDERWRITERS' LAB. INC. LISTED RATING
20A - 125, 250 OR 480 VAC
10A - 125 VAC "L"
1HP - 125 VAC, 2HP - 250 VAC
1/2A - 125 VDC, 1/4A - 250 VDC

L288
L299
L308

20(3)A 250V ~ T85 5E4

SCALE --- FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .060 LB

BA-2RV22 ISSUE 4

M BA-2RV22 PAGE 1 OF 1

ISSUE 12 | DRAWING NUMBER | RELEASE NO. | REPLACES

REVISIONS

A	CO 15663	G C H 15 DEC 61
B	C034312	D B W 25 APR 75
C	CO - 70184-G	G J W 6 MAR 92
D	CO-72397	JJO 30APR92
E	CO-75204B	JWB 1 FEB 94
F	CO 77590	SAD 10 JUN 94
G	C093346	DLT 26 AUG 98
H	CO-94212-C	DLT 20 SEP 99

CHECK | DRAWN | CHECK

G C H | 15 DEC 61 | FORMTEK

FD-50378