MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

ASSEMBLY—SWITCH

CATALOG LISTING
23AC2

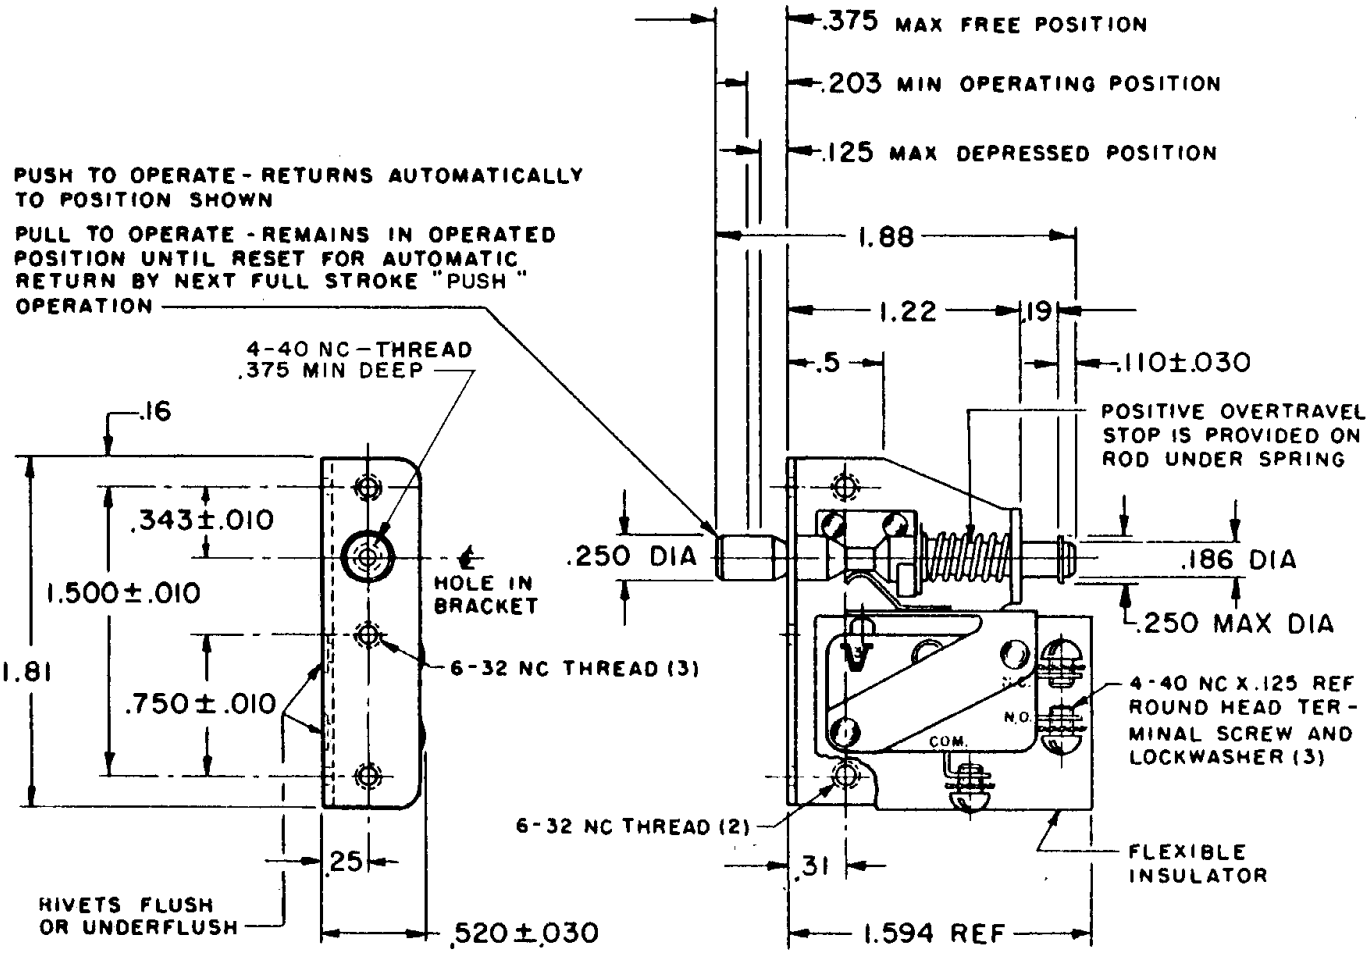

NOTE-
1-UNIT INCLUDES CATALOG LISTING V3-13 BASIC SWITCH (1)
2-NOTCH IN ACTUATOR ROD WILL PERMIT .035 DISPLACEMENT BETWEEN END OF ROD AND HOLE IN BRACKET
3-BASIC SWITCH PLASTIC PARTS ARE MADE OF MINERAL FILLED PHENOLICS
4-ACTUATOR ROD MADE OF HIGH STRENGTH PLASTIC

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

TOTAL TRAVEL
.250 APPROX PUSH DIRECTION
.187 APPROX PULL DIRECTION

FULLY DEPRESSED FORCE 4 LBS MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT	BREAK DISTANCE
S P D T	.040 APPROX

15 A-1/3 HP-125 OR 250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC

Ⓐ

Ⓑ

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

23AC2 | M | DRAWING NUMBER | ISSUE X 3 | RELEASE NO. SR 8861 | REPLACES

REVISIONS
A CORR KLB 22 APR 60
B C017056 LMH 25 JUN 26

DRAWN	MBF	23 MAR 60
CHECK	GCH	4 Apr 60
CHECK	RJS	28 MAR 60
CHECK		

FO-50376