MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH – BASIC

CATALOG LISTING
2DM1

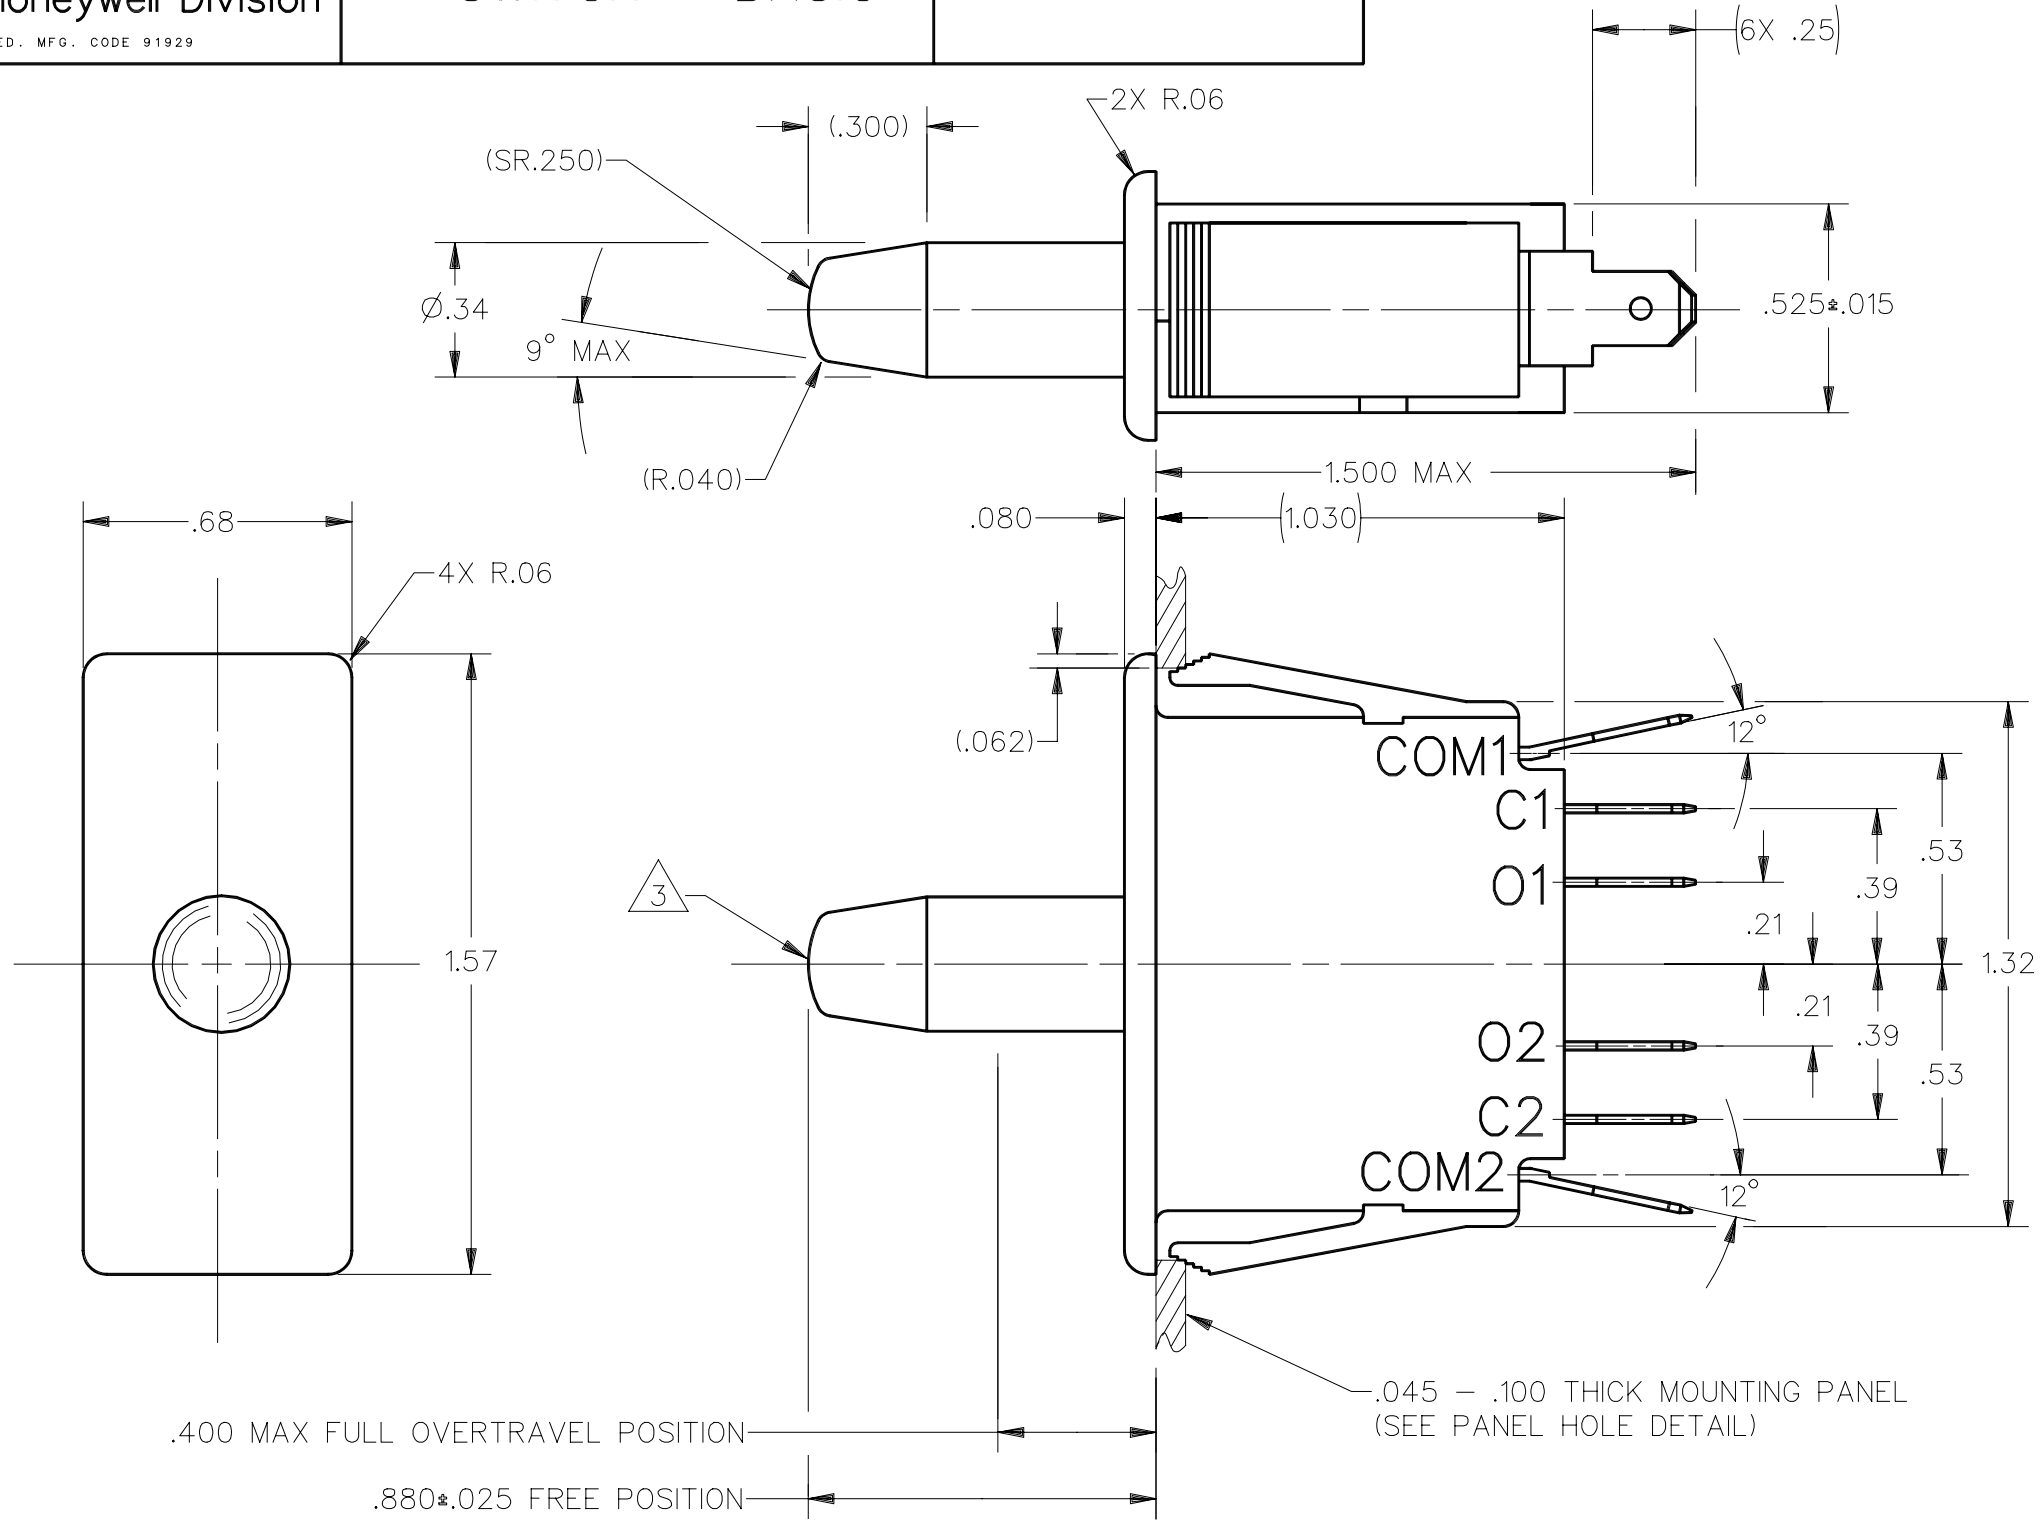

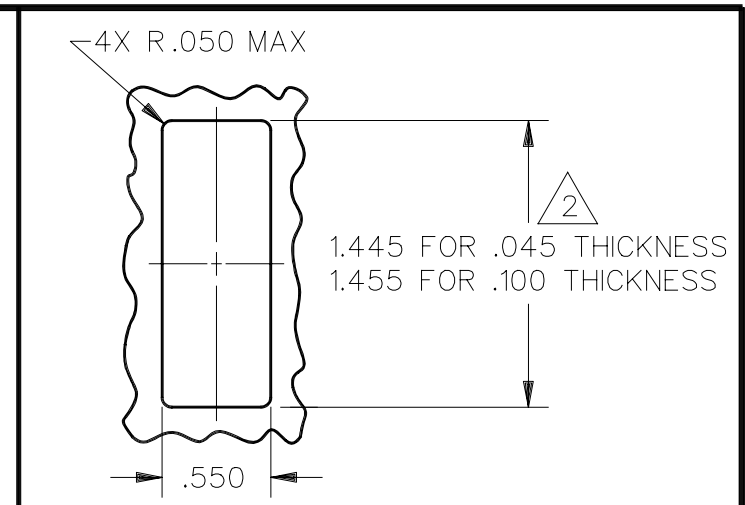

PANEL HOLE DETAIL
SCALE FULL

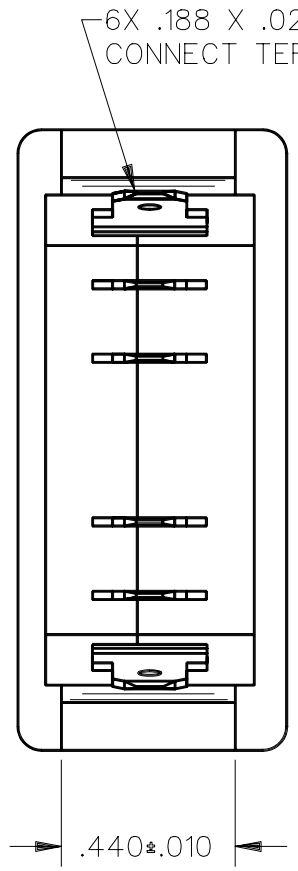

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE– – – – – 24 OZ MAX (TO OPERATE BOTH CIRCUITS)	CONTACT ARRANGEMENT D P D T
RELEASE FORCE– – – – – – – 6 OZ MIN (TO RELEASE BOTH CIRCUITS)	L181 10A 1/2HP 125, 250 OR 277 VAC
DIFFERENTIAL TRAVEL – – .045 APPROX (EACH CIRCUIT)	

THIRD ANGLE PROJECTION

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		± 5°

WEIGHT

NOTES
1 – BLACK PLASTIC CASE AND PLUNGER
2 NOMINAL CUTOUT DIMENSION FOR PANELS BETWEEN .045 AND .100 SHOULD BE INTERPOLATED BETWEEN 1.445 AND 1.455
3 PUSH TO OPERATE – MOMENTARY

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING 2DM1
RELEASE NO. PR–4967
REPLACES
ISSUE 5
CHECK
REVISIONS
A CO–72328 DHD 21 JUL 92
DDM/CAD
DRAWN DHD 21 JUL 92
CHECK