


| |
|--------------------------|
| HONEYWELL PART NUMBER |
| V15H16-CZ100A06-K |
| PRODUCT CODE |
| CFW2049 |

| REV | DOCUMENT | CHANGED BY | CHECK |
|-----|----------|------------|-------|
| A | 0038670 | VS 10APR08 | BLR |

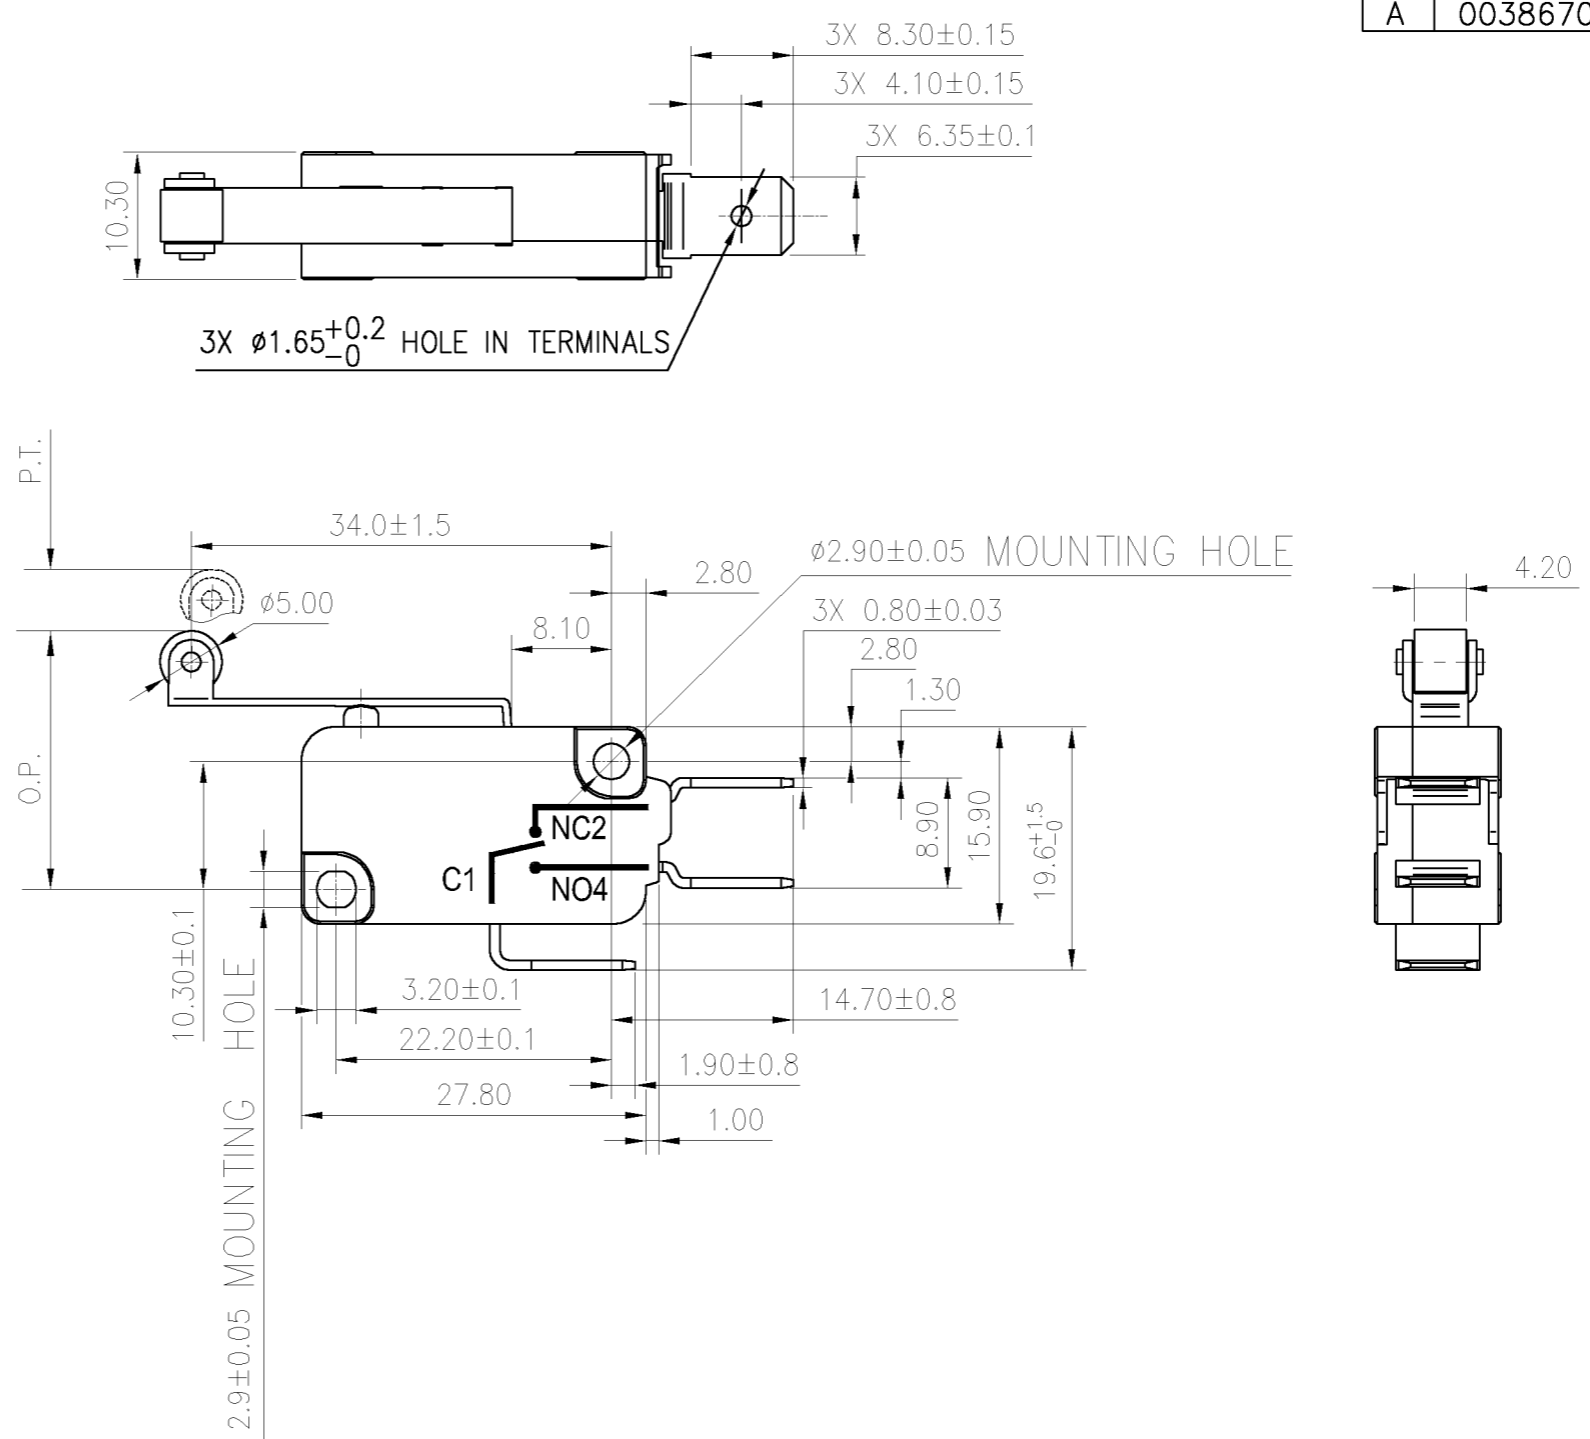

NOTES:
1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

| CHARACTERISTICS | |
|------------------------|-------------|
| OPERATING FORCE: | 60gf MAX. |
| DIFFERENTIAL FORCE: | |
| RELEASE FORCE: | 10gf MIN. |
| FREE POSITION: | |
| OPERATING POSITION: | 20.6±1.6MM. |
| PRE-TRAVEL: | 3.2MM MAX. |
| DIFFERENTIAL TRAVEL: | 1.2MM MAX. |
| OVER-TRAVEL: | 1.3MM MIN. |
| FULL OVERTRAVEL FORCE: | |

| ELECTRICAL DATA | |
|---------------------|------------------------------|
| CONTACT ARRANGEMENT | |
| S.P.D.T | |
| | 16(4)A 250V~ 25T150 μ 5E4 |
| | 16A 1/2HP 125/250VAC |

| DESIGN UNITS: MM | | | |
|--------------------------|------|---|--------|
| TOLERANCES UNLESS NOTED: | | | |
| NO PLACE | X | ± | ± |
| ONE PLACE | .X | ± | ± |
| TWO PLACE | .XX | ± | ± 0.40 |
| THREE PLACE | .XXX | ± | ± |
| ANGLES | X | ± | ± 2° |
| THIRD ANGLE PROJECTION | | | |
| | | | |

| | | |
|--|-----|---------|
| DRAWN | KSR | 01APR08 |
| CHECK | RJ | 01APR08 |
| THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. | | |
| INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY | | |
| AutoCAD | | |

| Honeywell | | | | | |
|----------------|------|-----------|-------------------|-----|------|
| TITLE | | | | | |
| SWITCH - BASIC | | | | | |
| SIZE | TYPE | CAGE CODE | DRAWING NAME | REV | |
| B | I | | V15H16-CZ100A06-K | A | |
| SCALE | NTS | | SHEET | 1 | OF 1 |