


HONEYWELL PART NUMBER
11SM244
PRODUCT CODE TWW4400
JG-80518
FAA-PMA

REV	DOCUMENT	CHANGED BY	CHECK
8	0038223	SSK 17APR08	BLR

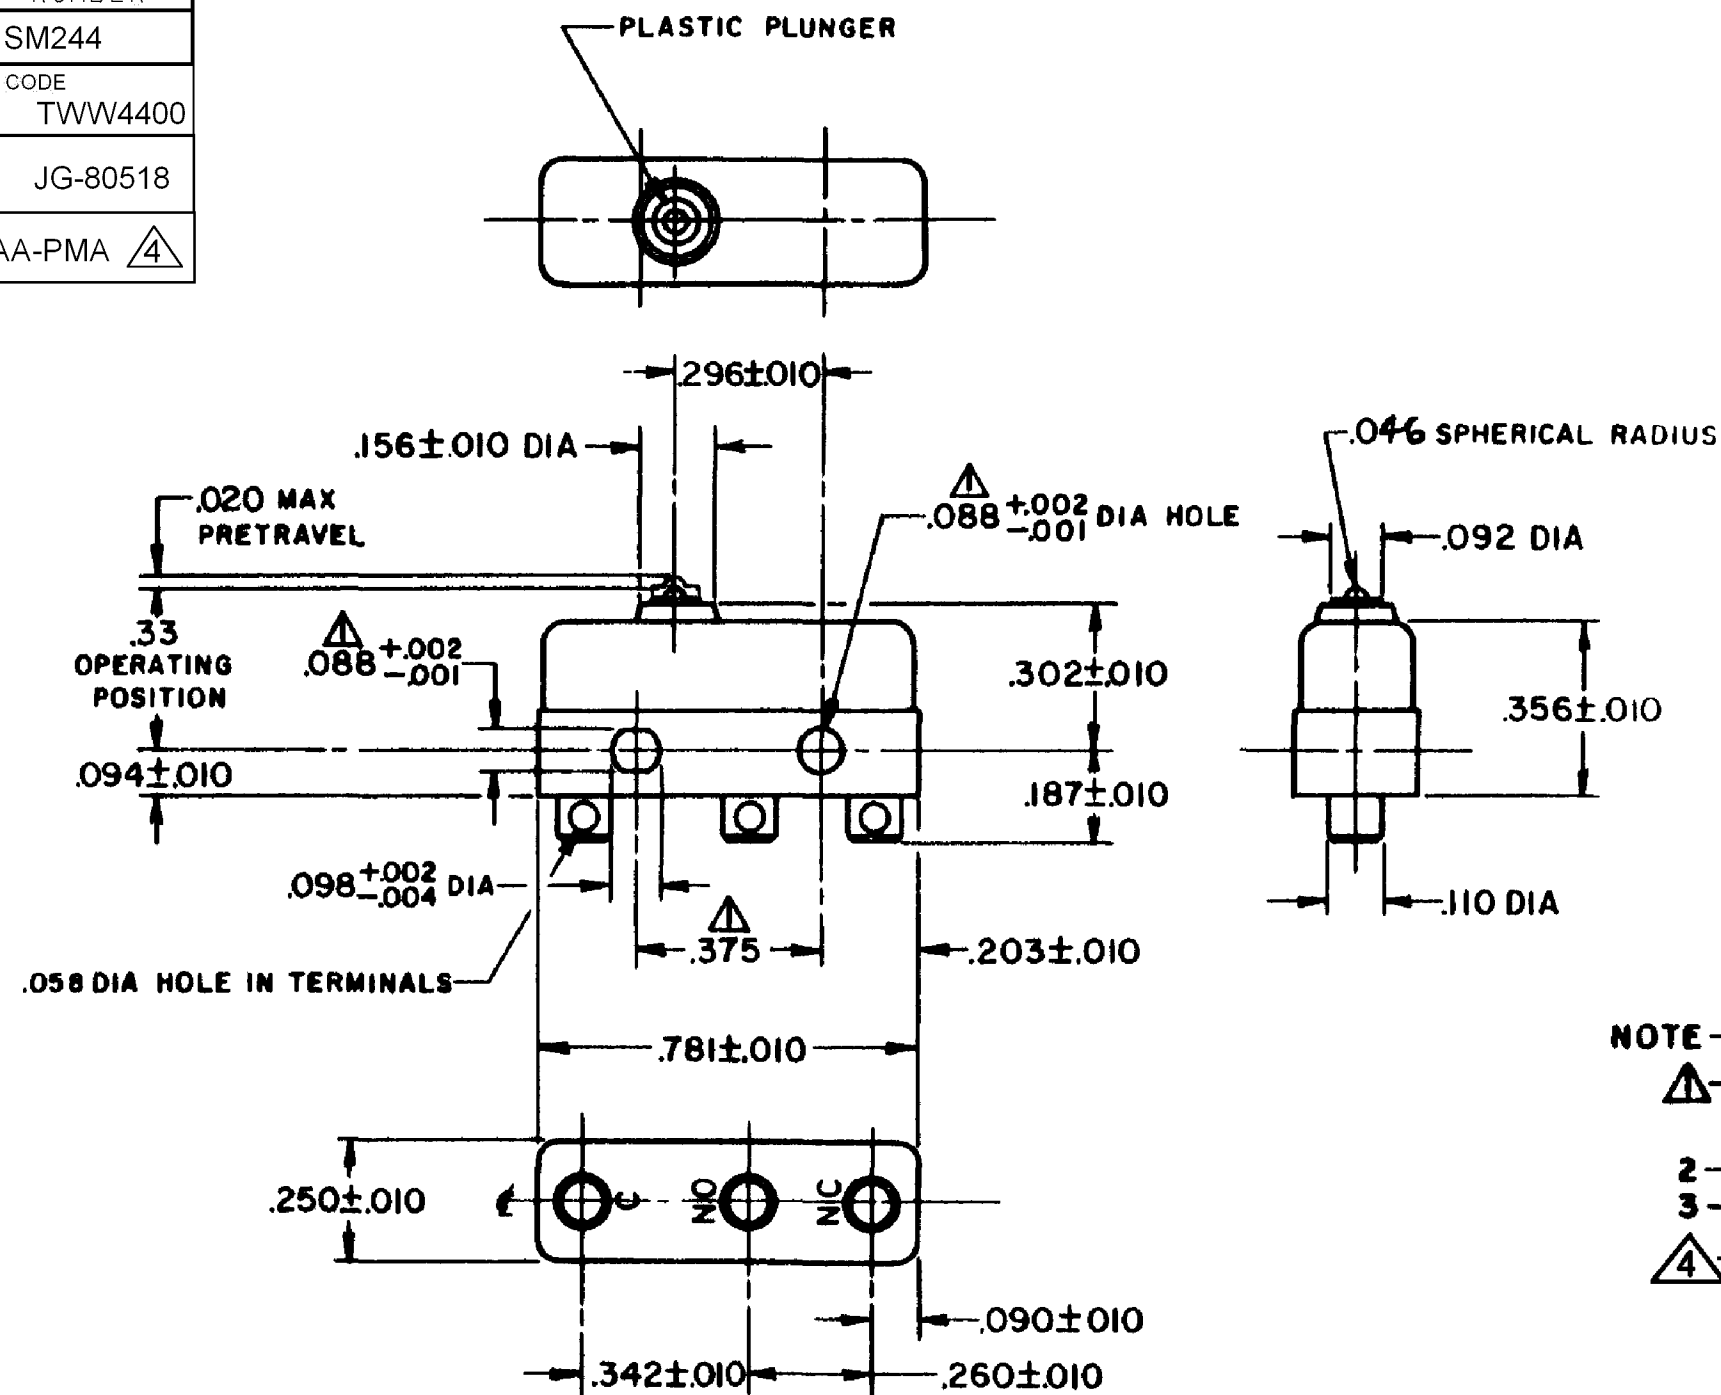

**NOTE -**

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400° F
- FOR MANUFACTURING DETAIL SEE ASSEMBLY DRAWING 11SM244 FOR FAA-PMA

RELEASE NO.	SR - 9842
REPLACES	-

CHARACTERISTICS
OPERATING FORCE - - - - 3 - 5 OZ
RELEASE FORCE - - - - 1 OZ MIN
DIFFERENTIAL TRAVEL - - - .004 MAX
OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA												
<table border="1"> <tr> <td>APPROVALS</td> <td>KEMA, CE</td> <td>5A, 250V ~ T85 1E4</td> <td></td> </tr> <tr> <td></td> <td>UL, CSA</td> <td>5A, 250 VAC 0.3A 125 VDC</td> <td></td> </tr> <tr> <td></td> <td>AVIATION</td> <td>FAA - PMA</td> <td></td> </tr> </table>	APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4			UL, CSA	5A, 250 VAC 0.3A 125 VDC			AVIATION	FAA - PMA	
APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4										
	UL, CSA	5A, 250 VAC 0.3A 125 VDC										
	AVIATION	FAA - PMA										

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	VK	27 NOV 07
CHECK	RJ	27 NOV 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

<b>Honeywell</b>			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
<b>B</b>	<b>I</b>	<b>11SM244</b>	<b>8</b>
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1