



HONEYWELL PART NUMBER
11SM244-T
PRODUCT CODE TWW4460

REV	DOCUMENT	CHANGED BY	CHECK
7	0038223	SSK 17APR08	BLR

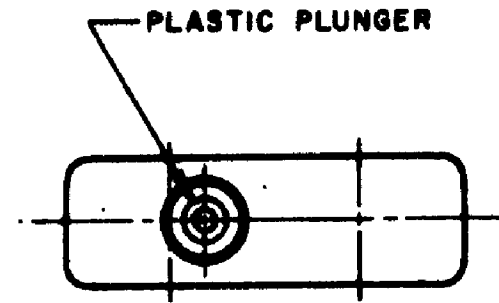

PLASTIC PLUNGER

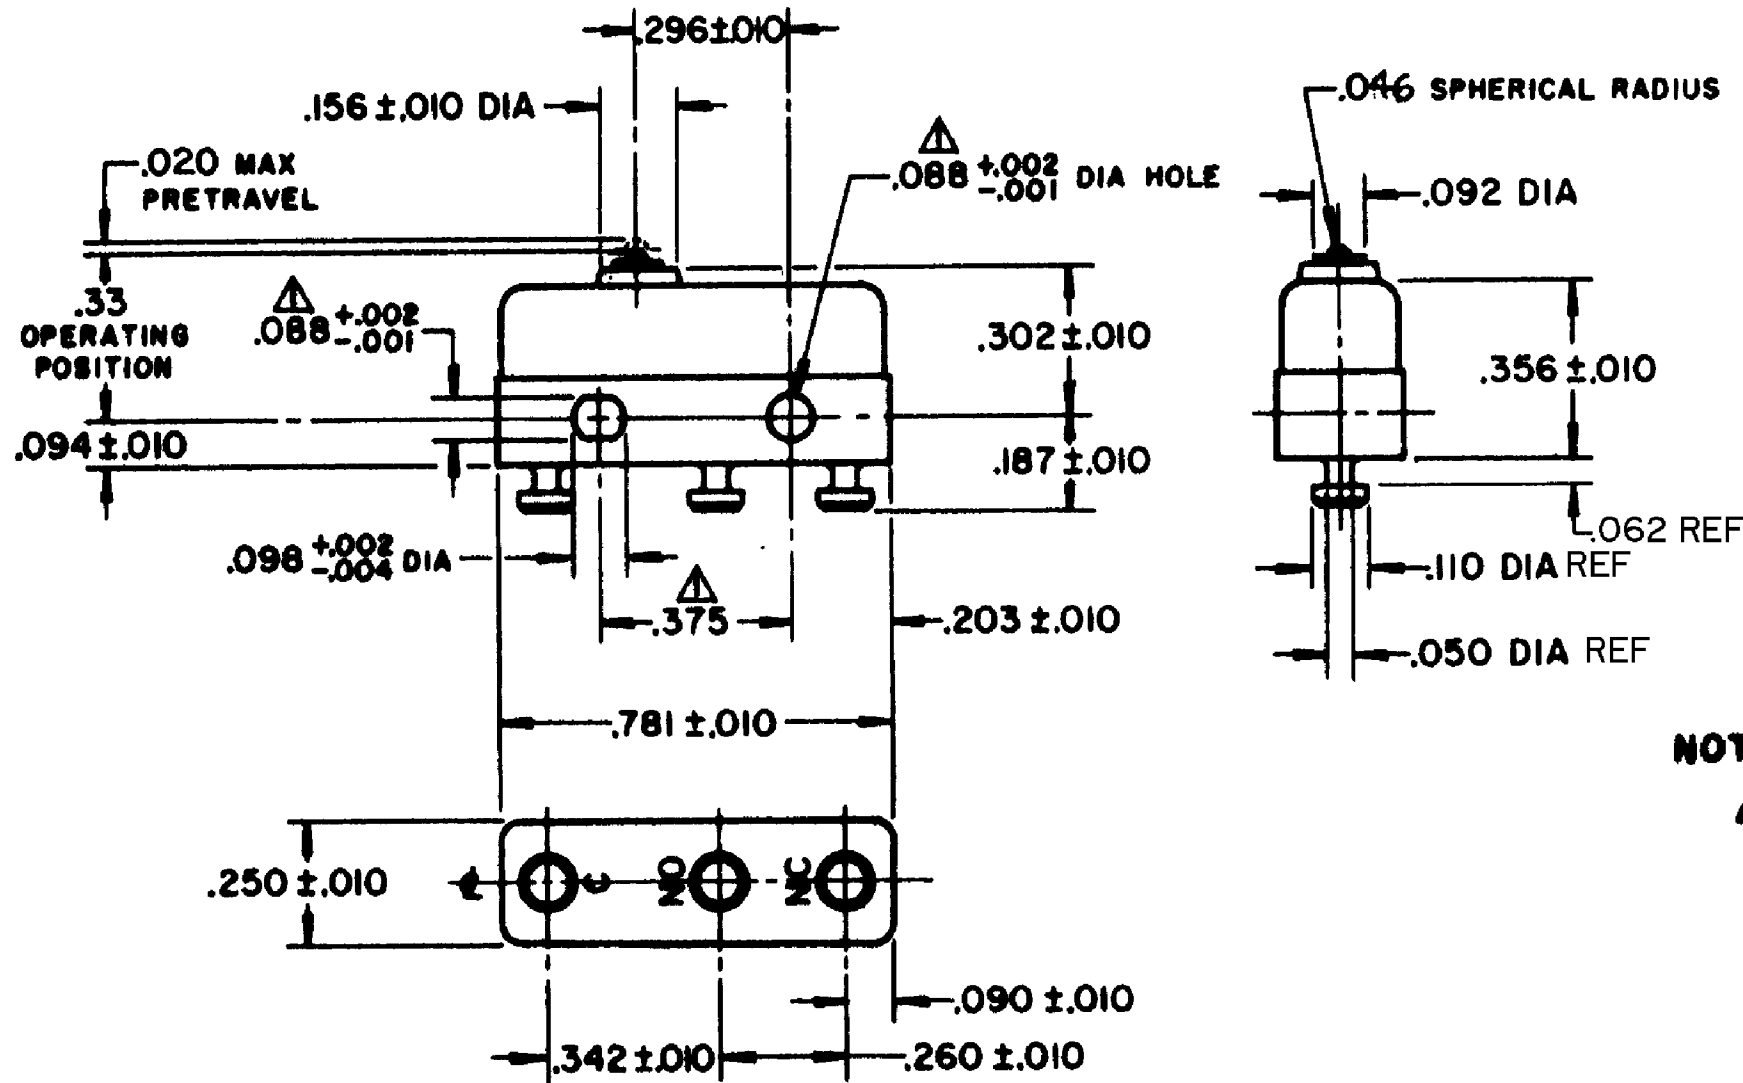

**NOTE -**  
 ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS  
 2-TERMINALS ARE PLATED FOR SOLDERING  
 3-SWITCH WILL WITHSTAND TEMPERATURE OF 400° F

RELEASE NO.	SR - 9651
REPLACES	-

CHARACTERISTICS
OPERATING FORCE - - - - 3 - 5 OZ
RELEASE FORCE - - - - 1 OZ MIN
DIFFERENTIAL TRAVEL - - - .004 MAX
OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA
KEMA, CE 5A, 250V ~ T85 1E4
UL, CSA 5A, 250 VAC 0.3A 125 VDC

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±

DRAWN	VK	27 NOV 07
CHECK	RJ	27 NOV 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

<b>Honeywell</b>			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	11SM244-T	7

APPROVALS	

THIRD ANGLE PROJECTION

RASTER
--------

SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1
-------	---	--------------------	--------------