

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-1A17D8-057

CW-B0261

CATALOG LISTING

V7-1A17D8-057

REPLACES

RELEASE NO. PR-20339

M

ISSUE 4

CHECK

REVISIONS

A	PR-20339	D H D	9 OCT 92
B	CO-74430	D H D	24 FEB 93
C	CO-74566	D H D	30 APR 93

CHECK

16 OCT 92

J A L


CHECK

9 OCT 92

D H D

D D M / CAD


DRAWN

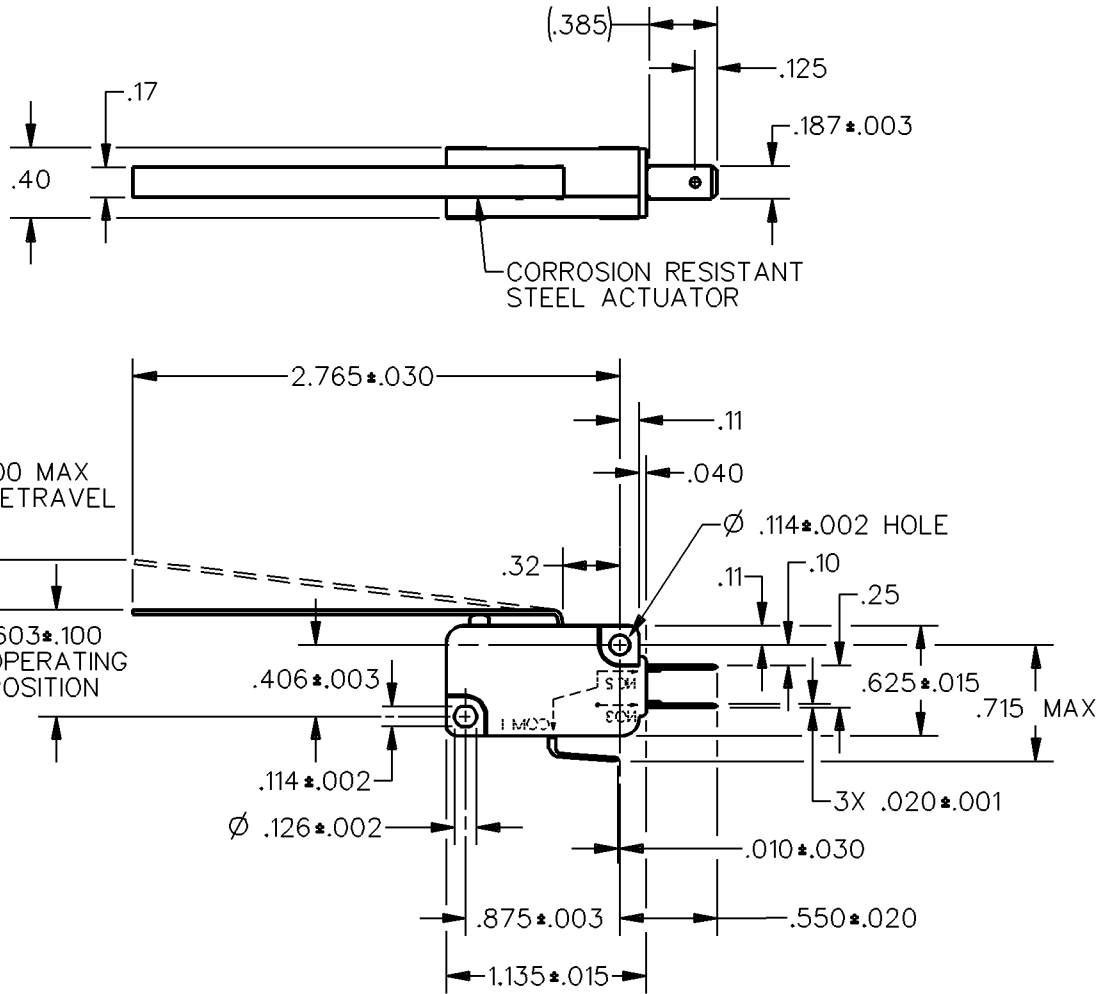

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

ELECTRICAL DATA

SCALE FULL

DO NOT SCALE PRINT

OPERATING FORCE — — — 38 GRAMS MAX
 RELEASE FORCE — — — 3 GRAMS MIN
 DIFFERENTIAL TRAVEL — — — .070 MAX
 OVERTRAVEL — — — — .145 MIN
 RELEASE TRAVEL — — — — .035 MIN

CONTACT ARRANGEMENT
S P D T

L162 5A 125, 250, 277 VAC
1/10HP 250 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) $\pm .030$
 TWO PLACE (.00) $\pm .015$
 THREE PLACE (.000) $\pm .005$

ANGLES \pm

WEIGHT

