FO-50360-L

CW-B8685

REV	DOCUMENT	CHANGED BY	CHECK
6	0000241	CSL 7 MAY 03	SAV

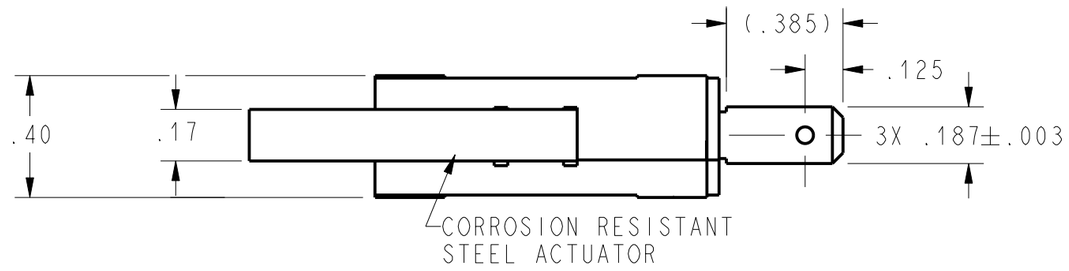

NOTES
1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACT
2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A
RESISTIVE LOAD

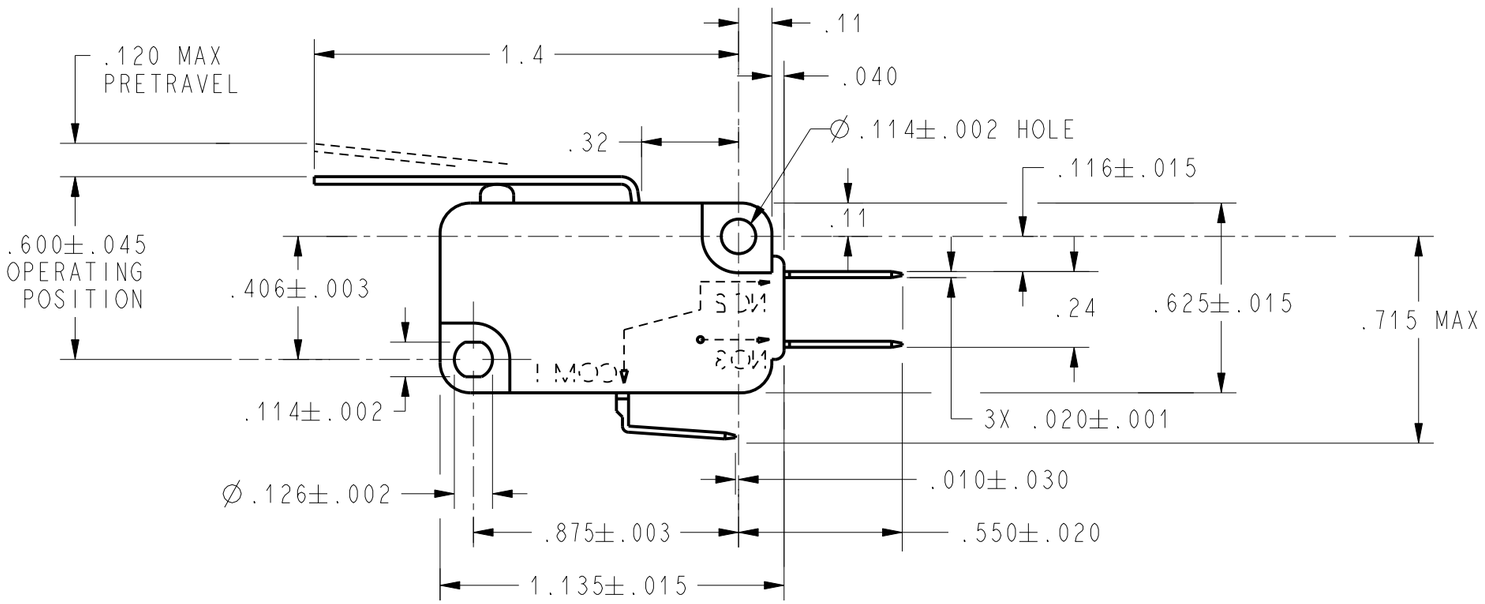

CHARACTERISTICS	
OPERATING FORCE	30 GRAMS MAX
RELEASE FORCE	1 GRAMS MIN
DIFFERENTIAL TRAVEL	.030 MAX
OVERTRAVEL	.085 MIN
RELEASE TRAVEL	.017 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L142
0.1A 125 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	CSL	7 MAY 03
CHECK	SAV	7 MAY 03

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	1	V7-3S17D8-022	6

SCALE 2:1 | WEIGHT | SHEET 1 OF 1