MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BZ-2RN770
AKS7600 & JG07952

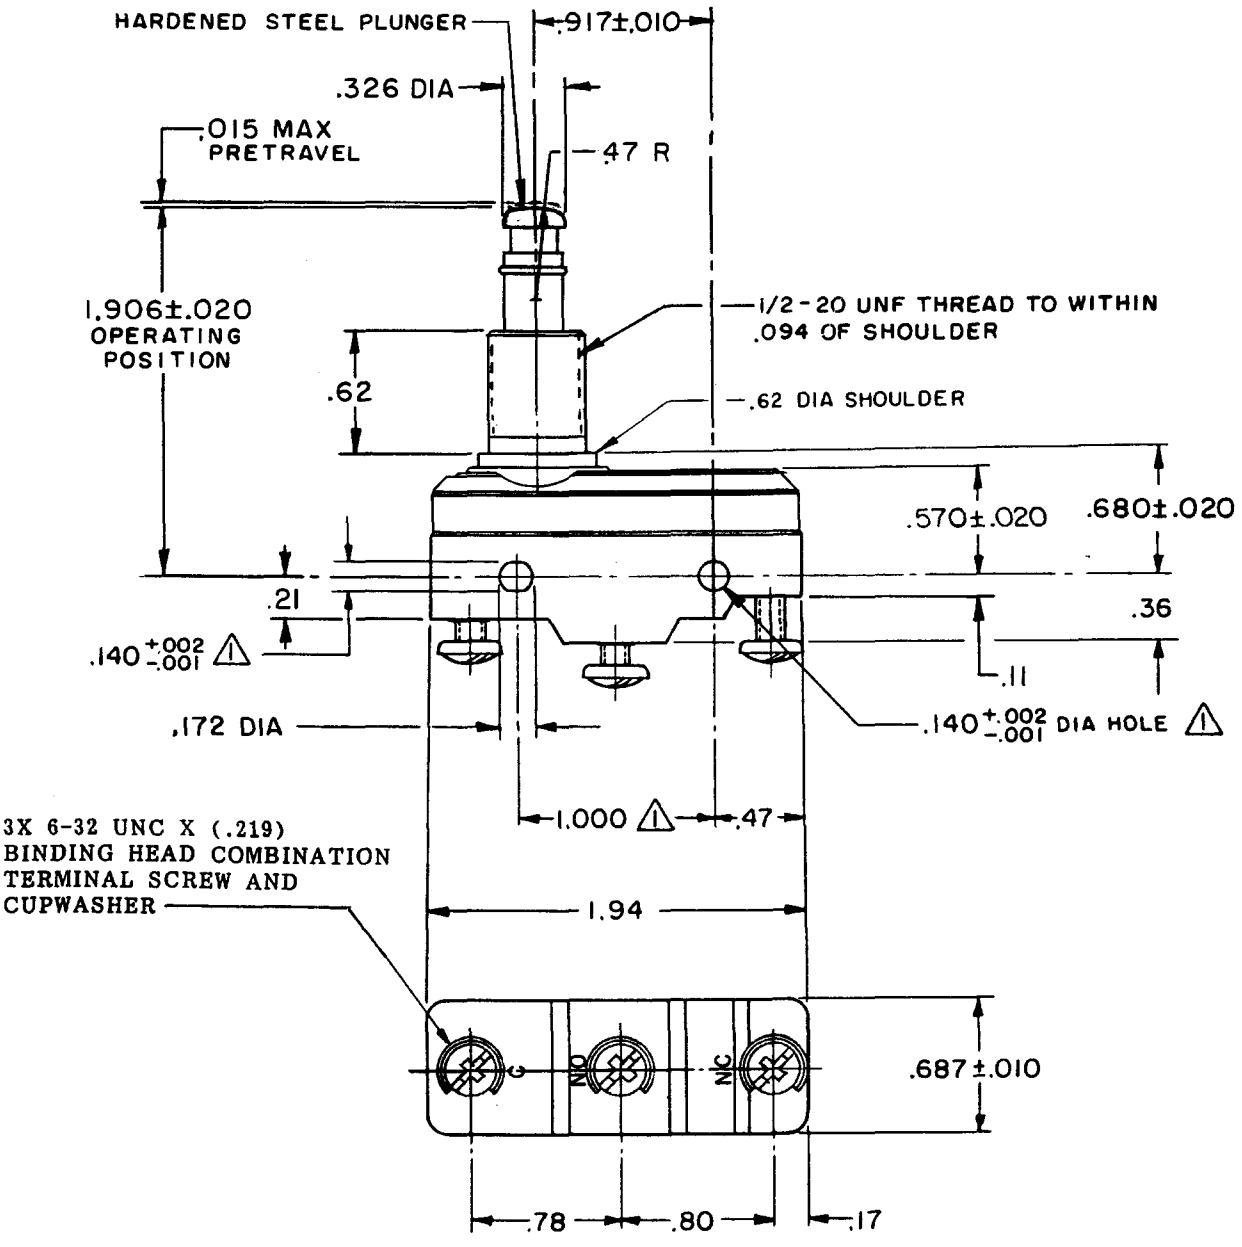

NOTE
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — — — 9-13 OZ
RELEASE FORCE — — — — — — 4 OZ MIN
DIFFERENTIAL TRAVEL — — .0004-.0020
OVERTRAVEL — — — — — — — .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

15A-125, 250 OR 480 VAC, 2A-600 VAC
1/8HP-125 VAC; 1/4HP-250 VAC
CODE L74 1/2A-125 VDC; 1/4A-250 VDC
L288
L315
L306
16A 250V ~ T85 5E4

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

X43454-BZ
REPLACES
BZ-2RN770
PAGE 1 OF 1
M
RELEASE NO. PR-1249
DRAWING NUMBER
18 FEB 06
ISSUE 9
RJ
CHECK
6 JAN '70
EWP
CHECK
6 JAN '70
DAW
CHECK
6 JAN 70
M B S
DRAWN
FORMTEK
0-50378-1A

REVISIONS

A	CO 33706	6L_M 17 JUN 74
B	C035336	K P K 9 MAY 75
C	C036332	R E R 14 JAN 76
D	C036099	K P K 3 JUN 77
E	CO-73287-J	J A L 22 NOV 93
F	CO-77592	DAW 15 AUG 94
G	C093346	D L T 1 SEP 98
H	0018449	DVM 18 FEB 06