MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BZ-2RQ785
ALL3000 & JG08566

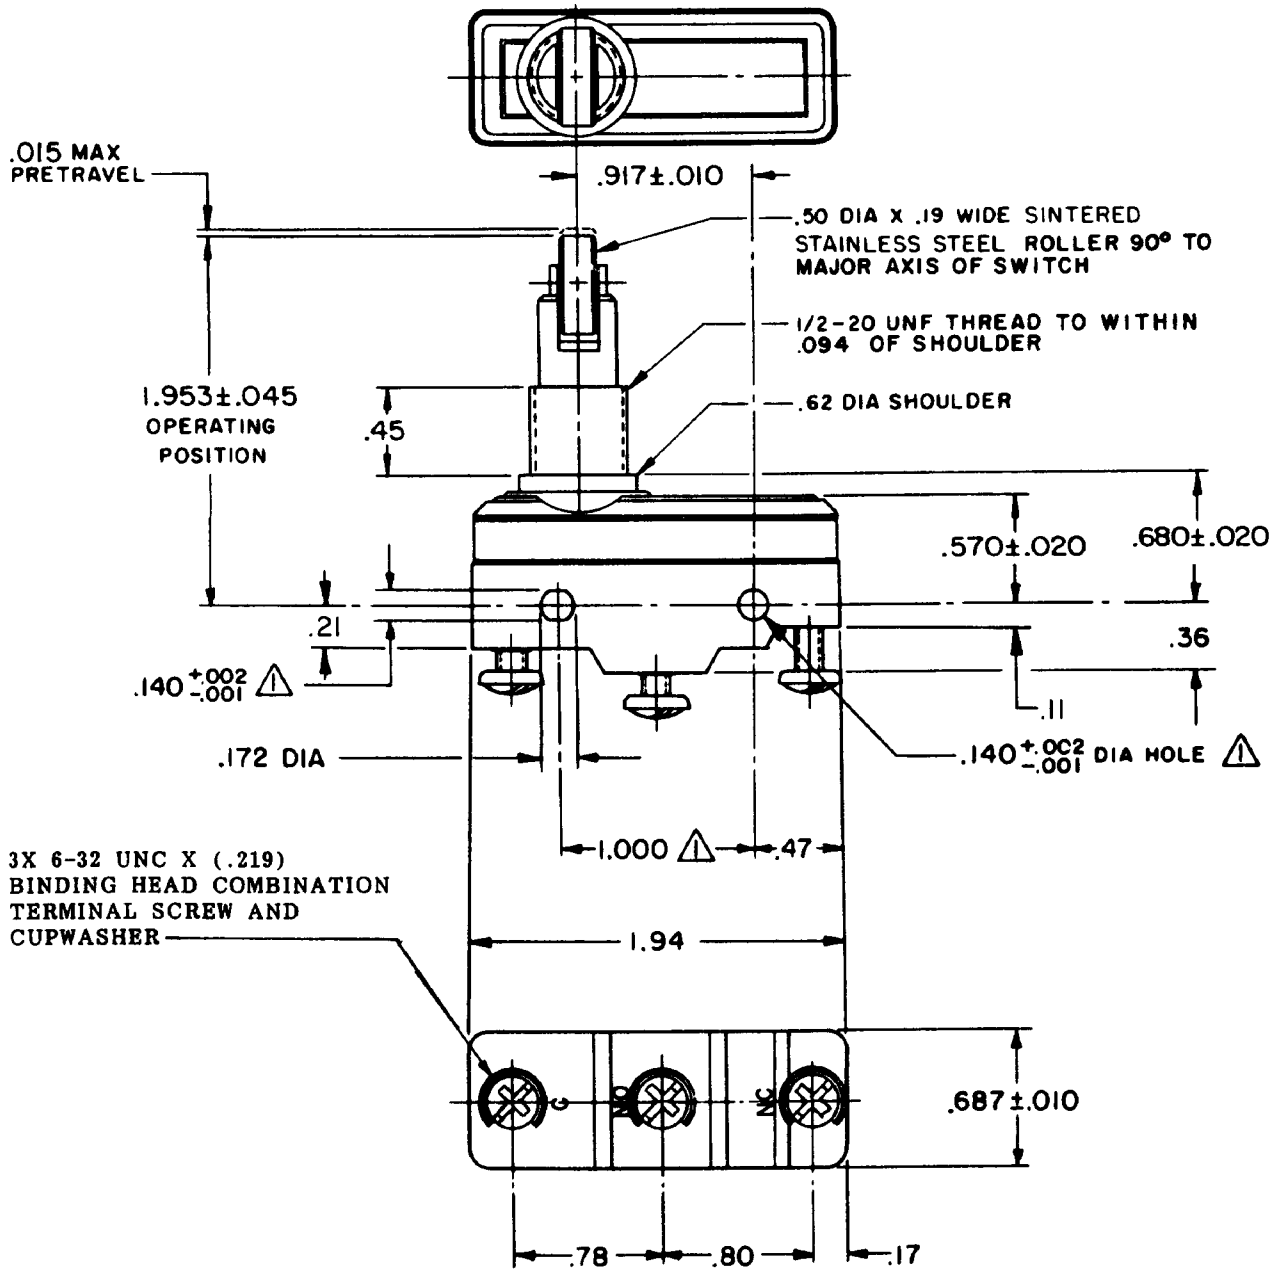

NOTE
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2 - HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - - - - 9-13 OZ
RELEASE FORCE - - - - - - - - 4 OZ MIN
DIFFERENTIAL TRAVEL - - - .0004-.0020
OVERTRAVEL - - - - - - - - - - .141 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

15A-125, 250 OR 480 VAC, 2A-600 VAC
1/8HP-125 VAC, 1/4HP-250 VAC
CODE L74 1/2A-125 VDC; 1/4A-250 VDC
L288
L306
L315 16A 250V ~ T85 5E4

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		± 2°

WEIGHT

BZ-2RQ785 PAGE 1 OF 1
M
DRAWING NUMBER
RELEASE NO.
ISSUE 10
REPLACES

REVISIONS

A	C017410	30 JUL 64	JAN
B	C034383	4 NOV 74	BEN
C	C036099	JUN 77	BK
D	CO-73287-J	22 NOV 93	JAL
E	CO-77426-B	29 JUN 94	DLT
F	CO-77592	15 AUG 94	DAW
G	CO-82497-C	18 MAR 96	DLT
H	C093346	2 SEP 98	DLT
J	0018449	TGP 18 FEB 06	

18 FEB 06 RJ CHECK
11 AUG 64 DAW CHECK
30 JUL 64 JAN DRAWN
FORMTEK
FO-30378