

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PINEBROOK, ILLINOIS

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ - RX

BZ - RX
ISSUE 10

M
BZ - RX

DRAWING NUMBER

ISSUE
13

REVISIONS

A CO
16325
G C H
19 JAN 62

B CO
34307
GLH
19 JAN 76

C CO77590
DLT
9 JUN 94

CHECK

B, JUNE 62

CHECK

DRAWN


G C H

19 JAN 62

CHECK

REPLACES

RELEASE NO.

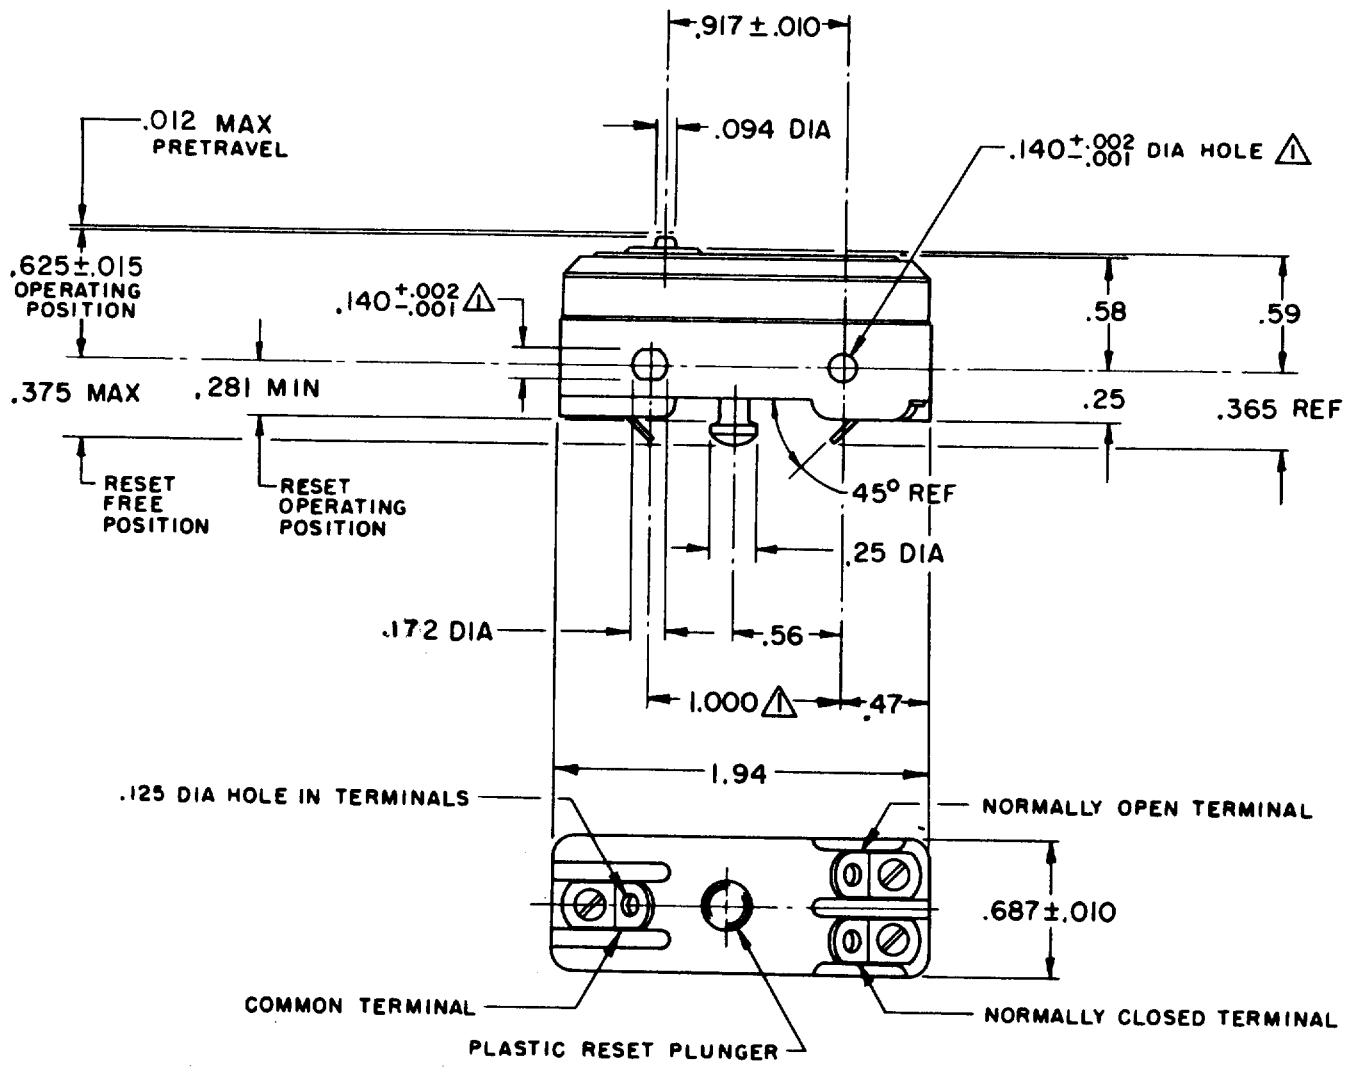

NOTE -

⚠ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 7-9 OZ
OVERTRAVEL ----- .005 MIN

RESET CHARACTERISTICS

OPERATING FORCE ----- 2-10 OZ
OVERTRAVEL ----- .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE DOUBLE THROW
MAINTAINED CONTACT

BREAK DISTANCE

UNDERWRITERS' LAB. INC. LISTED RATING
15 A - 125, 250, OR 480 VAC
-L 67- 1/4 HP - 125 VAC; 1/2 HP - 250 VAC
1/2 A - 125 VDC; 1/4 A - 250 VDC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .055 LB