MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BME6-2RQ

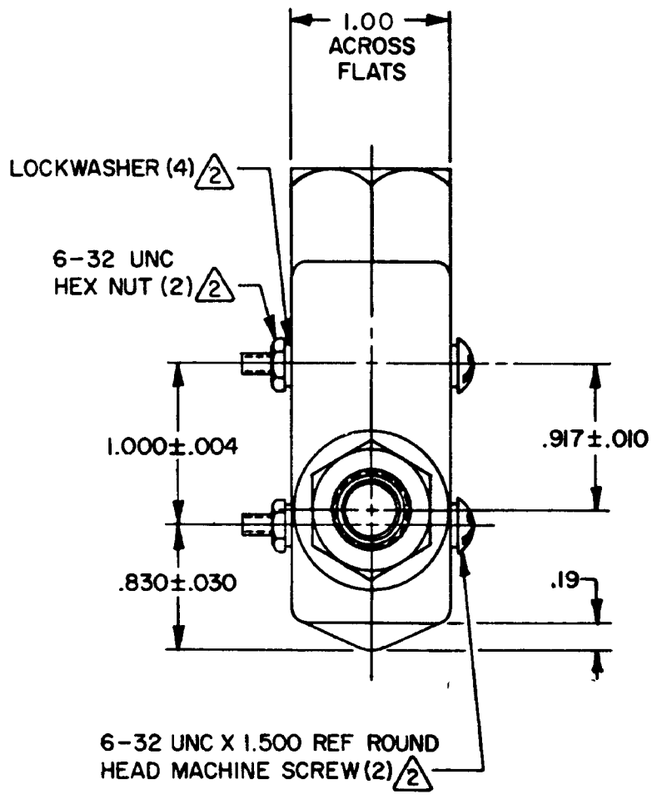

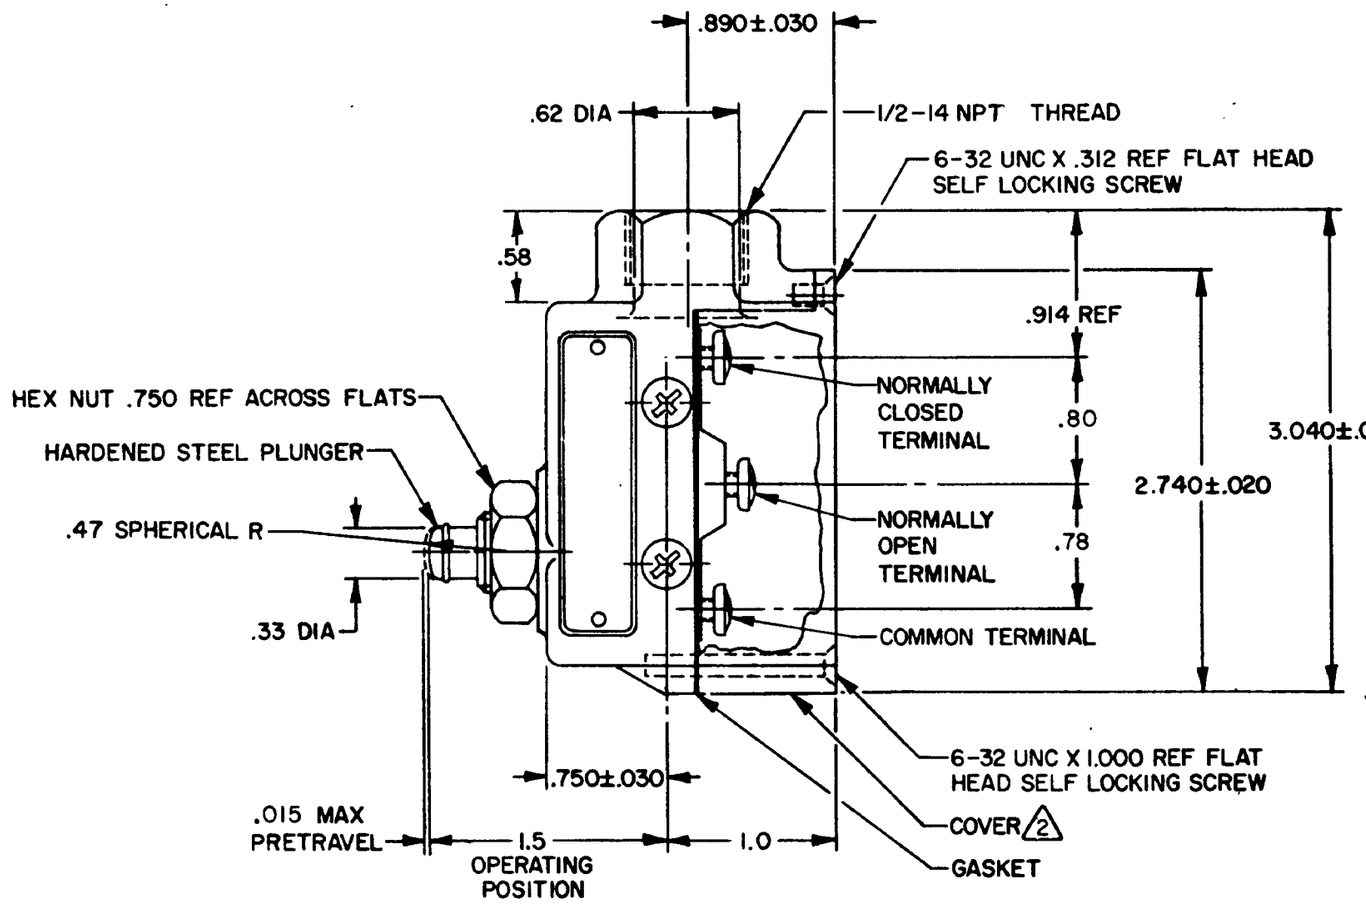

NOTES-

1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3) FURNISHED UNASSEMBLED
2
3 - SEAL RATING: NEMA1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	
OPERATING FORCE	9-13 OZ
RELEASE FORCE	4 OZ MIN
DIFFERENTIAL TRAVEL	.002 MAX
OVERTRAVEL	.219 MIN
BASIC SWITCH REPLACEMENT	BM-2RQ66

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

CODE L101 22A-125, 250 OR 480 VAC
1/4HP-125 VAC; 1/2HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		

WEIGHT .53 LB

BME6-2RQ

ISSUE	DRAWING NUMBER	RELEASE NO	DATE	CHECK
M	7		10 NOV 05	RJ

REVISIONS

A	C038200	J A L 30 AUG 77	
B	C053191-G	2 CJH MAY 84	2 SEP 77
C	C055989	8 J A P NOV 84	ROB
D	C054958	26 TSK FEB 85	CHECK
E	C072476	4 MAW SEP 92	77
F	0016894	KRB 10 NOV 05	SEP
			2
			K P K
			CHECK
			30 AUG 77

REPLACES

DRAWN J A L

FO-9251-A