


P.C. MOUNTING

O.P. (MM)	P.T. (MM)
5.5 ± 0.5	0.5



O.P. = OPERATING POINT  
P.T. = PER-TRAVEL




CIRCUIT: SPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. RATING: 0.1A @ 5VAC
4. OPERATING FORCE: 125gf
5. OPERATING TEMP: -25°C TO 105°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. INSULATION RESISTANCE: 100 MEGA-OHMS
8. DIELECTRIC STRENGTH: 1000VAC-MIN.
9. ▲ DENOTES CRITICAL PARAMETER.
10. 2002/95/EC (ROHS) COMPLIANT

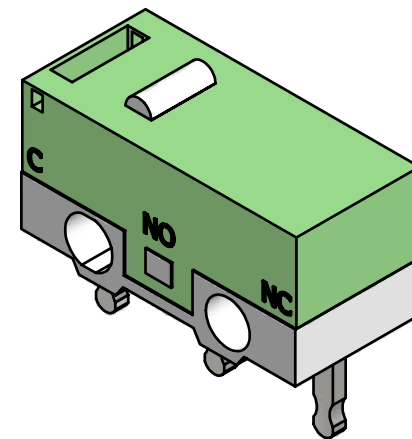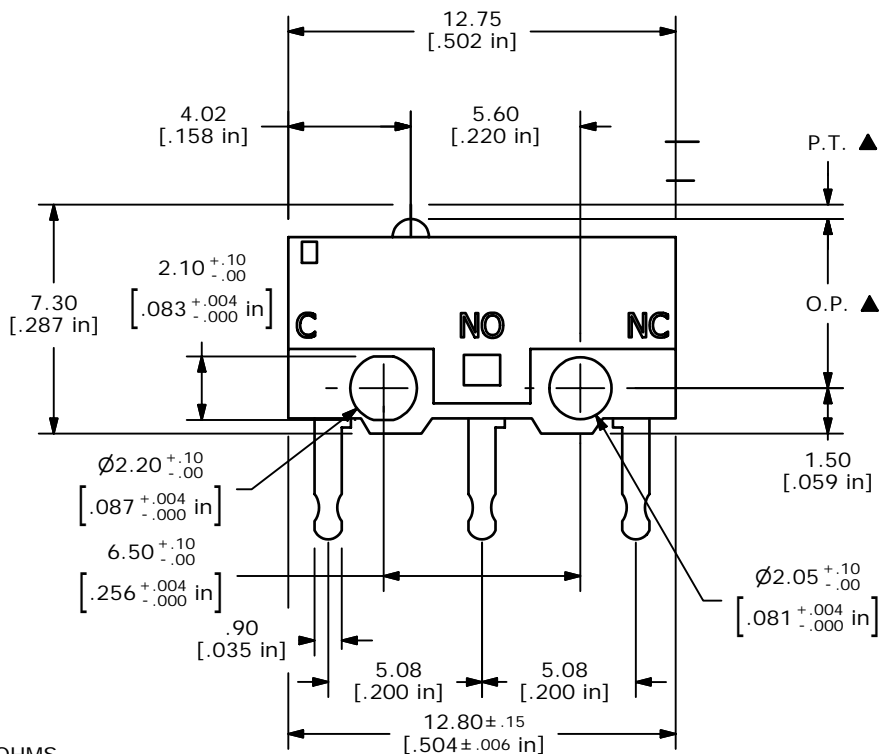

ISOMETRIC

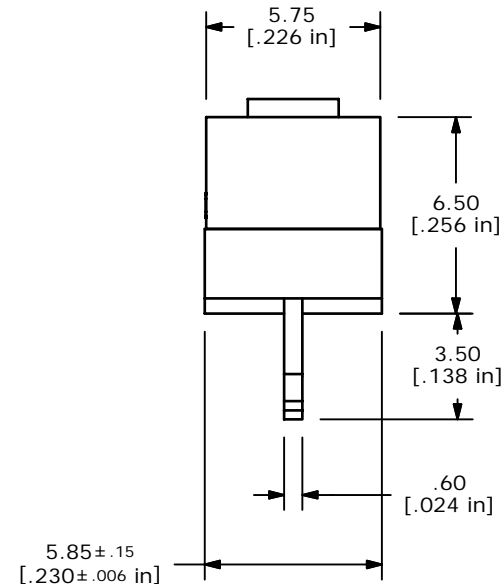

TITLE DM085Q100F125P1A

B	17495	REVISED AND REDRAWN	7/23/07	BF
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
4:1	7/23/2007	BF	P030023	B