



▲ O.P. (MM)	P.T. (MM)
15.5 ± 0.8	4.1 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



CIRCUIT: SPDT

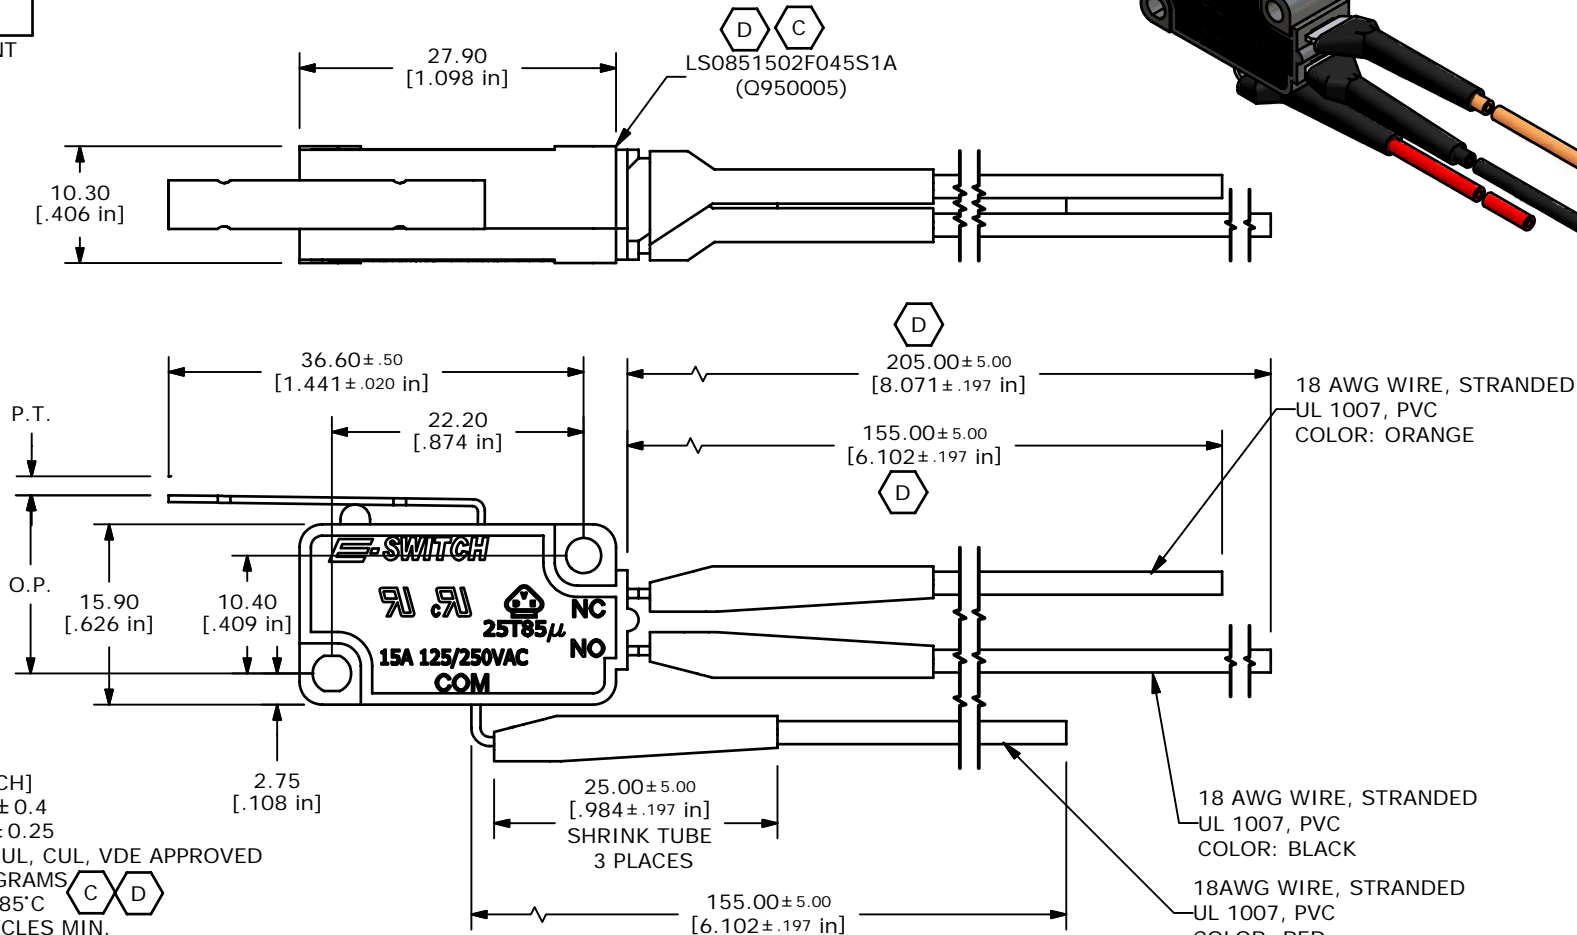

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X ± 0.4
X.XX ± 0.25
 3. RATING: 15A @125/250VAC UL, CUL, VDE APPROVED
 - ▲ 4. OPERATING FORCE: 45 ± 20 GRAMS
 5. OPERATING TEMP: -25°C TO 85°C
 6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
 7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
 8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
 9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
 10. CONTACT RESISTANCE: 100 MILLI -OHMS MAX.
 11. ▲ DENOTES CRITICAL PARAMETER.

F	15648	LEVER DIMENSION FROM 36.20 TO 36.60	1/3/06	PH
E	15594	ADD TOLERANCE TO LEVER, EDIT NOTE 7	12/7/05	PH
D	15058	CORRECTED DIMMENSIO PNS AND NOTE 4	7/5/05	JB
C	14969	CHANGED NOTE #4	6/2/05	JB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE LS0851502F045S1A, RED, BLK, ORG WIRES

SCALE	DATE	DR	DWG	REV
1.5:1	2/25/2005	AR	XQ0006P	F