


RECOMMEND P.C.B. HOLES

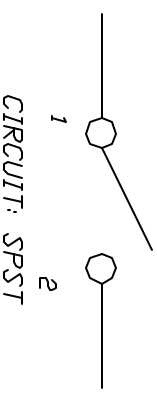

CONTACT CONFIGURATION

CIRCUIT: SPST

1

2

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF ONLY
3. RATING: DC 12V, 50mA
4. TRAVEL: 0.25±0.1mm
5. CONTACT RESISTANCE: 100m Ohms Max.
6. LIFE: 100,000 CYCLES Min.
7. INSULATION RESISTANCE: 100M Ohms Min.
8. DIELECTRIC STRENGTH: 250 V RMS Min.

TOLERANCES		TITLE		SCALE		DATE		DR		DWG		REV	
0.0	±0.4	TL 1105 S F250 Q (STD. BRCKT)		4:1		7/2/98	MM		P021300			A	
0.00	±0.25	E-SWITCH®											
A	RELEASED FOR PRODUCTION	DATE	CHKD										
REV.	DESCRIPTION	THE INFORMATION CONTAINED IN THIS DOCUMENT IS PRELIMINARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED											