



RECOMMENDED MOUNTING PAD



CIRCUIT: SPST

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATINGS: 12VDC, 50mA
 5. CONTACT MATERIAL: Silver
 6. OPERATING FORCE: 160±50gf
 7. TRAVEL: 0.25±0.1mm
 8. CONTACT RESISTANCE: 100 mΩ Max.
 9. ELECTRICAL LIFE: 100,000 CYCLES min.
 10. DESIGNATE MAJOR FEATURE:
 11. BODY & STEM: HIGH TEMP. PLASTIC
 12. PACKAGED: TAPE & REEL, 700 PIECES PER REEL
 13. 2002/95/EC (ROHS) COMPLIANT

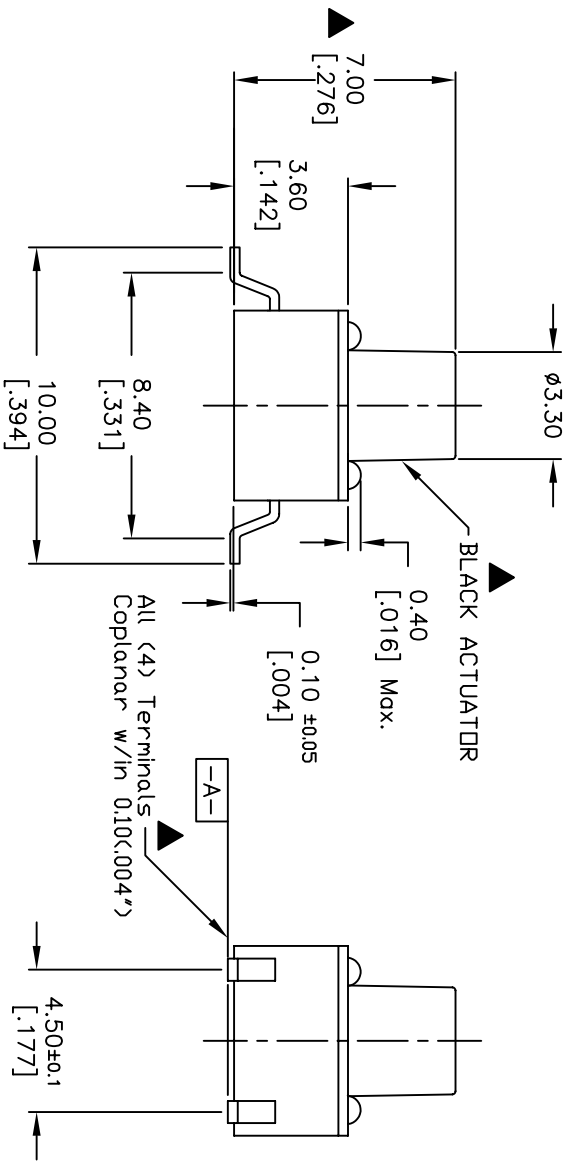

C	16569	UPDATED NOTES	10/24/06	TN					
B	12406	ADD BLACK TO ACTUATOR	9/9/02	CJB	TITLE				
A	11584	RELEASED FOR PRODUCTION	8/28/01	CJB	TL 3301FF1600G				
REV.	ECN NO.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED			4:1	8/28/01	CJB	D310536	C

