




ISOMETRIC

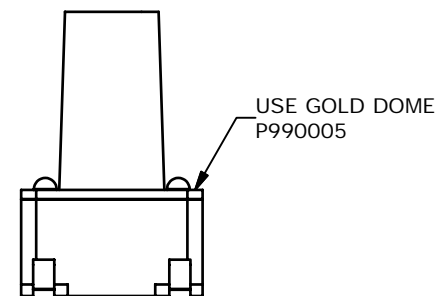

CIRCUIT: SPST

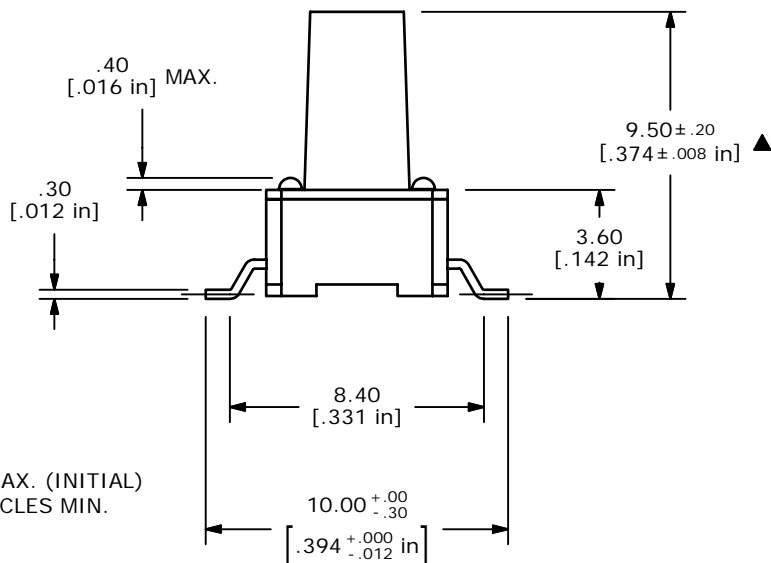

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 160 ± 50 gms
6. TRAVEL: 0.25mm +0.2/-0.1mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
9. GOLD CONTACTS
- ▲ 10. 2002/95/EC (ROHS) COMPLIANT
11. PACKAGING: 90/PCS TUBE
12. ▲ DENOTES CRITICAL PARAMETER

C	15787	ADD GOLD DOME INFO.	2/17/06	PH
B	15395	ADD PACKAGING INFORMATION	10/18/05	PH
A	15373	RELEASED FOR PRODUCTION	10/17/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

**E-SWITCH®**

TITLE TL3301BF160RG

SCALE	DATE	DR	DWG	REV
4:1	10/17/2005	PH	P010619	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED