



RECOMMENDED MOUNTING PAD



CIRCUIT: SPST

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REFERENCE ONLY.
  4. RATINGS: 12VDC, 50mA
  5. CONTACT MATERIAL: GOLD
  6. OPERATING FORCE: 160±50gf
  7. TRAVEL: 0.25±0.1mm
  8. CONTACT RESISTANCE: 100 MILLI Ω Max.
  9. ELECTRICAL LIFE: 100,000 CYCLES min.
  10. DESIGNATE MAJOR FEATURE:
  11. BODY& STEM: HIGH TEMP. PLASTIC -PPS RYTON-R-4
  12. PACKAGED: TAPE & REEL, 250 PER REEL
  13. 2002/95/EC (ROHS) COMPLIANT

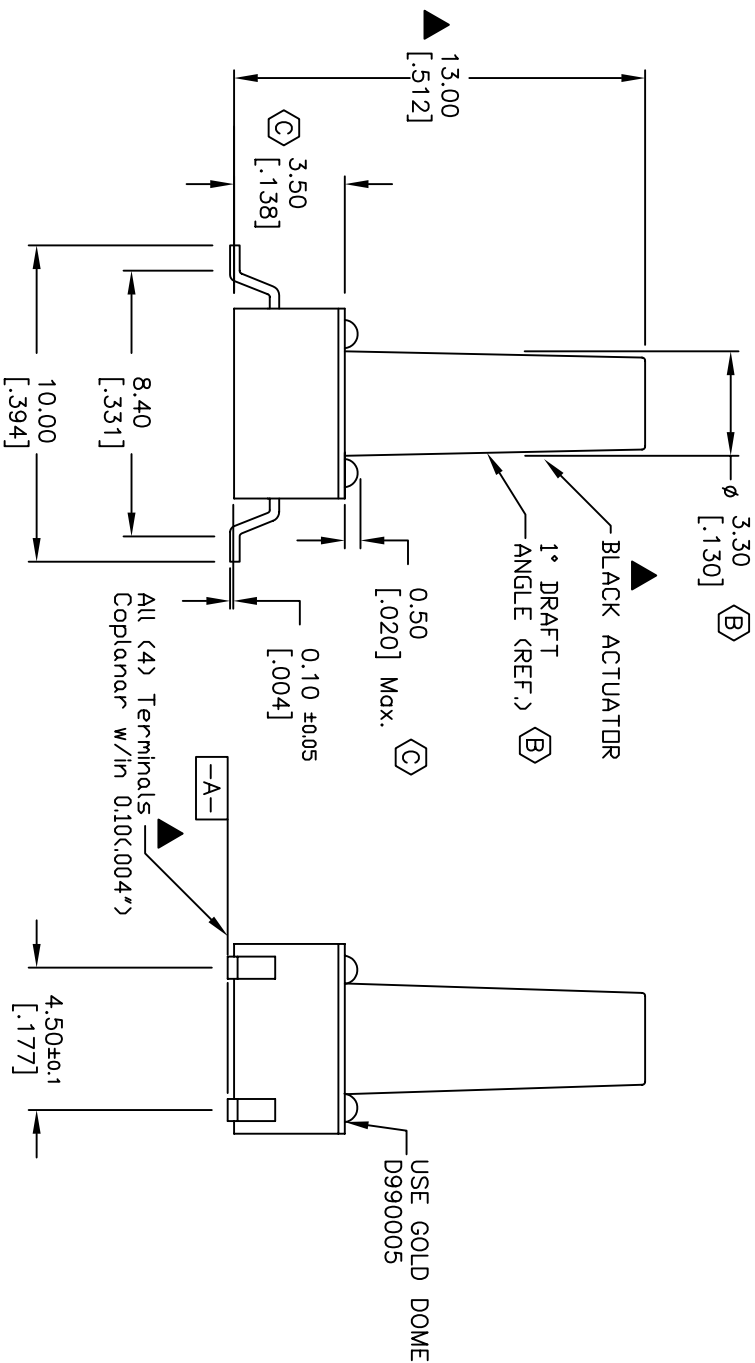

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
E	16575	UPDATED NOTES	10/24/06	TN
D	15729	ADD RDHS, GOLD DOME NOTE	2/2/06	PH
C	13341	3.50 WAS 3.60, .50 WAS .40	8/4/03	AR
B	13335	ACTUATOR TAPER	7/31/03	AR
A	11584	RELEASED FOR PRODUCTION	11/25/02	CJB



TL 3301DF160RG

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
E	16575	UPDATED NOTES	10/24/06	TN
D	15729	ADD RDHS, GOLD DOME NOTE	2/2/06	PH
C	13341	3.50 WAS 3.60, .50 WAS .40	8/4/03	AR
B	13335	ACTUATOR TAPER	7/31/03	AR
A	11584	RELEASED FOR PRODUCTION	11/25/02	CJB

SCALE	DATE	DR	DWG	REV
4:1	11/25/02	CJB	D310612	E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED