



RECOMMENDED MOUNTING PAD



CIRCUIT: SPST

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X:X=±0.4  
X:XX=±0.25
  3. TERM. NOS. FOR REFERENCE ONLY.
  4. RATINGS: 12VDC, 50ma (GOLD CONTACTS)
  5. CONTACT MATERIAL: Gold
  6. OPERATING TEMPERATURE: -40°C to +80°C
  7. OPERATING FORCE: 160±50gf
  8. TRAVEL: 0.25±0.1mm
  9. BODY & STEM: HIGH TEMP PLASTIC PPS (UL94V0) VALOX
  10. CONTACT RESISTANCE: 100 MILLI-OHMS Max.
  11. ELECTRICAL LIFE: 100,000 CYCLES min.
  12. ▲ DESIGNATE MAJOR FEATURE:
  13. PACKAGED: TAPE&REEL (1200/REEL)
  14. ACTUATOR COLOR: BLACK
  15. 2002/95/EC (ROHS) COMPLIANT

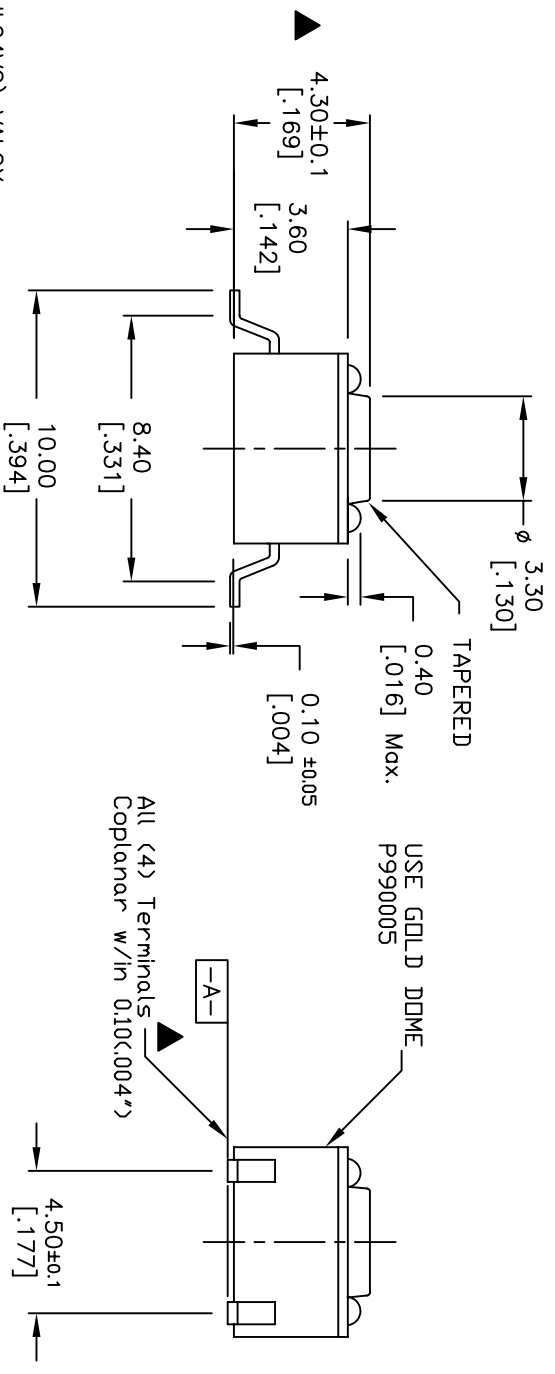

**E-SWITCH®**

B	16124	ADD GOLD DOME CALLOUT	6/9/06	CT
A	11874	RELEASED	9/11/02	CJB
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

TITLE		SCALE	DATE	DR	DWG	REV
TL3301N F160 R G (TAPE & REEL)		4:1	9/11/02	CJB	P010531	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED