



ALL TERMINALS TO BE COPLANAR WITHIN 0.1mm

FLUSH WITH SURFACE -A- TO BELOW.

DETAIL A  
SCALE 6:1

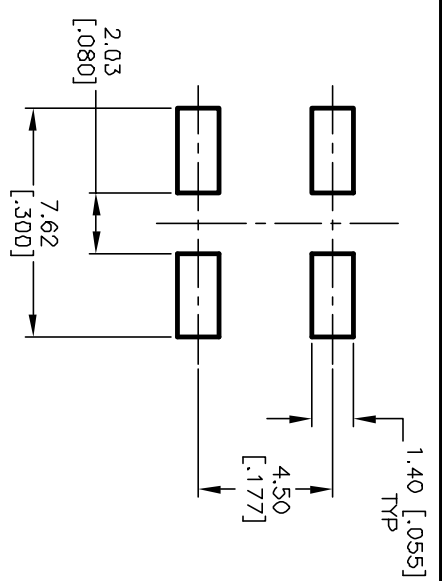

RECOMMENDED MOUNTING PAD  
SCALE: 4:1



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
5. BODY & STEM: PPS RYTON R-4
6. OPERATING FORCE: 160gf +50/-30grams
7. TRAVEL: 0.25 +0.2/-0.1mm
8. CONTACT RESISTANCE: 100 ohms max.
9. PACKAGED: TAPE & REEL (QTY1300)
- ▲ 10. DESIGNATE MAJOR FEATURE:



|   |   |         |       |             |                         |      |         |       |    |
|---|---|---------|-------|-------------|-------------------------|------|---------|-------|----|
| REV.  | A | ECN No. | 11586 | DESCRIPTION | RELEASED FOR PRODUCTION | DATE | 7/30/01 | CHK'D | CB |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED. |   |         |       |             |                         |      |         |       |    |

|       |                                   |      |         |    |    |     |         |     |   |
|-------|-----------------------------------|------|---------|----|----|-----|---------|-----|---|
| TITLE | TL 3301 SP F160 Q J (TAPE & REEL) |      |         |    |    |     |         |     |   |
| SCALE | 3:1                               | DATE | 7/30/01 | DR | CB | DWG | D310674 | REV | A |