



P.C.B. MOUNTING HOLES

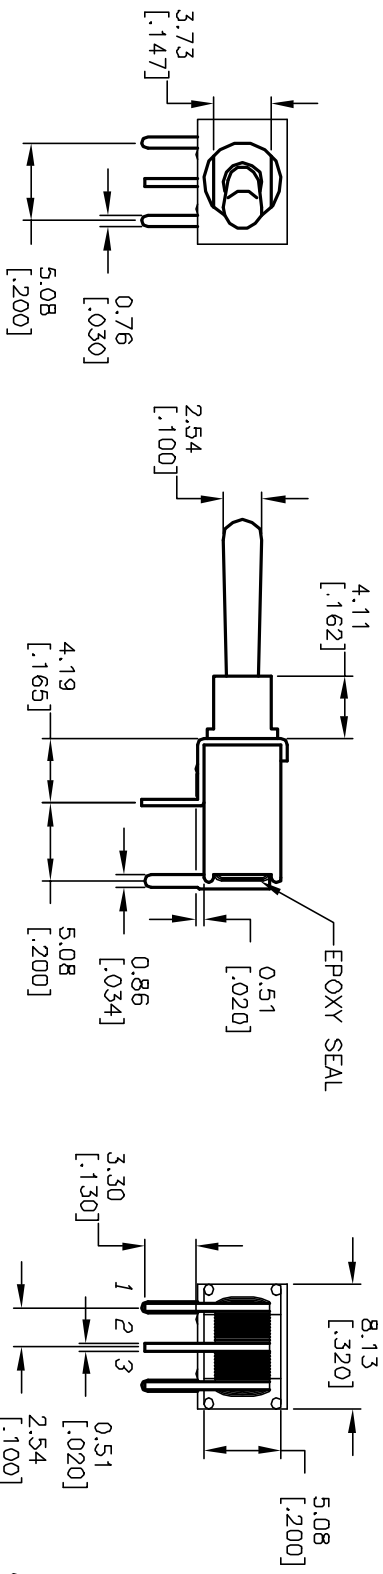

CONTACT CONFIGURATION



SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
DN	NONE	DN	
2-3	OPEN	2-1	

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 0.4(VA) max. @20V max. (AC or DC)
 5. FIXED TERM. & MOVING CONTACT: Copper alloy w/Gold plate over Nickel plate
 6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
 7. INSULATION RESISTANCE: 1000M ohm min.
 8. DIELECTRIC STRENGTH: 1000V RMS min. @sea level.
 9. OPERATING TEMP.: -30°C to 85°C
 10. ▲ DENOTES CRITICAL PARAMETER

E-SWITCH®

2004W/MSP11A1M6RE

REV. A		RELEASED FOR PRODUCTION		TITLE	
ECN No.	12924	DESCRIPTION	3/19/03	DATE	2004W/MSP11A1M6RE
DATE	3/19/03	CHKD	AR	SCALE	2:1
DATE	3/19/03	DR	AR	DATE	3/19/03
DATE	3/19/03	DWG	T201114	REV	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED