



RECOMMENDED PCB LAYOUT




CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 3A @120VAC or 28VDC;
1A @250VAC
5. FIXED TERM. & MOVING CONTACT:
COPPER Alloy w/SILVER PLATE.
6. ELECTRIC LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @seg level.
9. OPERATING TEMP.: -30°C to +85°C

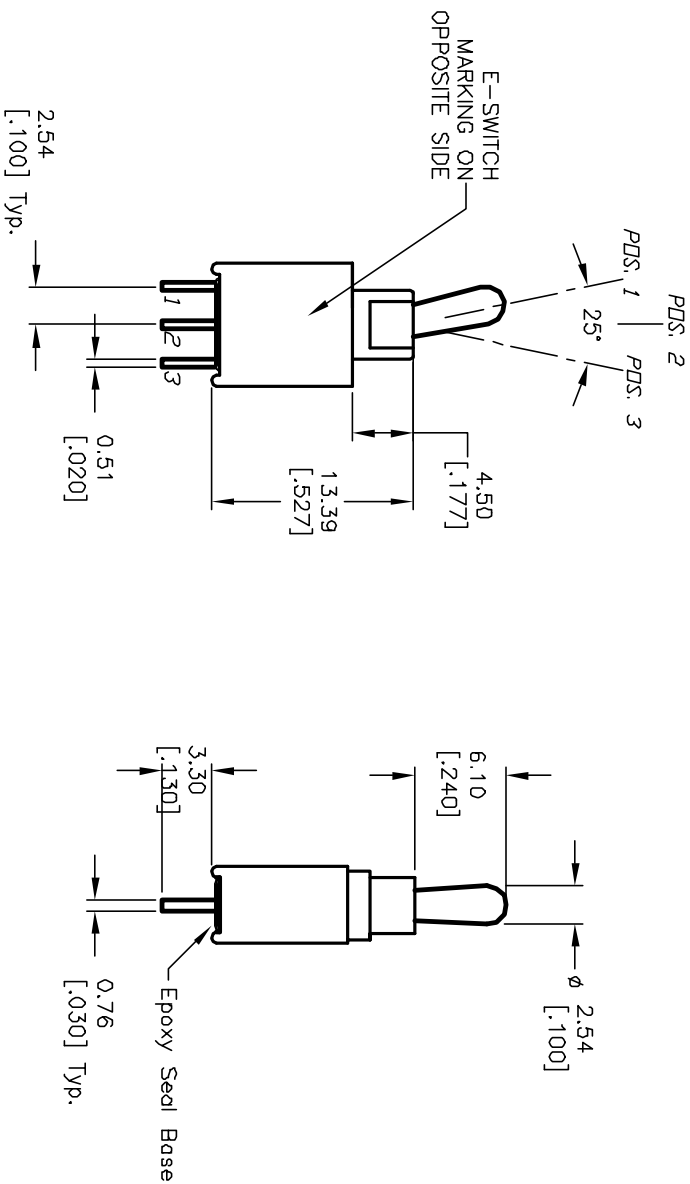

					E-SWITCH®							
TITLE					2004 W/MSP-1 T2 A1 M2 Q E							
SCALE					DATE		DR		DWG		REV	
2:1					3/6/02		CB		T201102		B	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED												
REV.		ECN NO.		DESCRIPTION		DATE		CHKD				
B		11468		REVISED AND REDRAWN		3/6/02		CB				
8. DIELECTRIC STRENGTH: 1,000 V RMS @sed level.												
9. OPERATING TEMP.: -30°C to +85°C												