

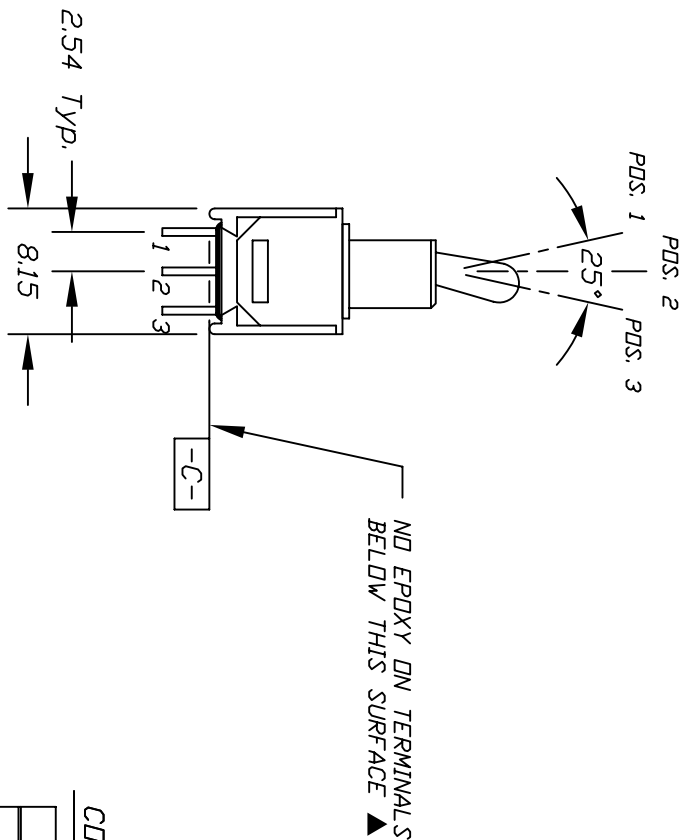


RECOMMEND P.C.B. LAYOUT

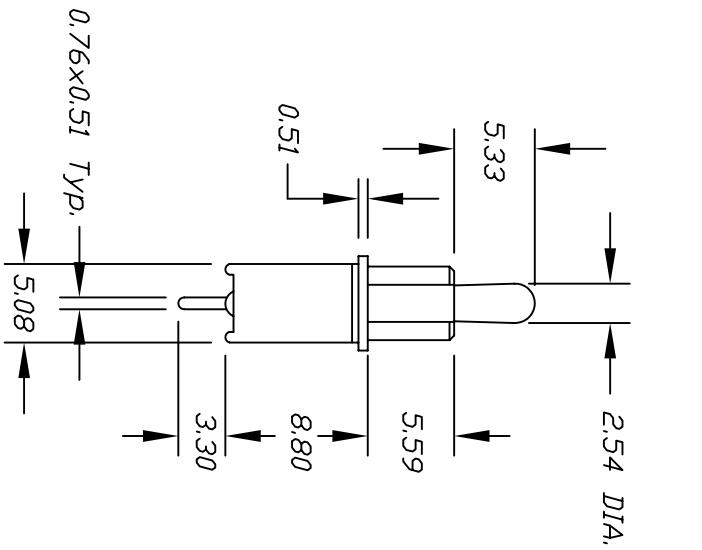

CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
DN	NONE	DN	
2-3	OPEN	2-1	

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF ONLY
3. RATING: 3 Amps @120 VAC or 28VDC, 1 Amps @250VAC.

E-SWITCH			
TITLE			
200 MSP-1 T2 B2 M2 Q E			
REV			
A			
DR			
MM			
DWG			
T211008			
DATE			
5/28/98			
SCALE			
2:1			
TOLERANCES			
0.0		±0.4	
0.00		±0.25	
CHKD	DATE	DESCRIPTION	
		RELEASED FOR PRODUCTION	
REV.	A		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
3. RATING: 3 Amps @120 VAC or 28VDC, 1 Amps @250VAC.			
C. IERW, NDS, FOR REF UNIT			