

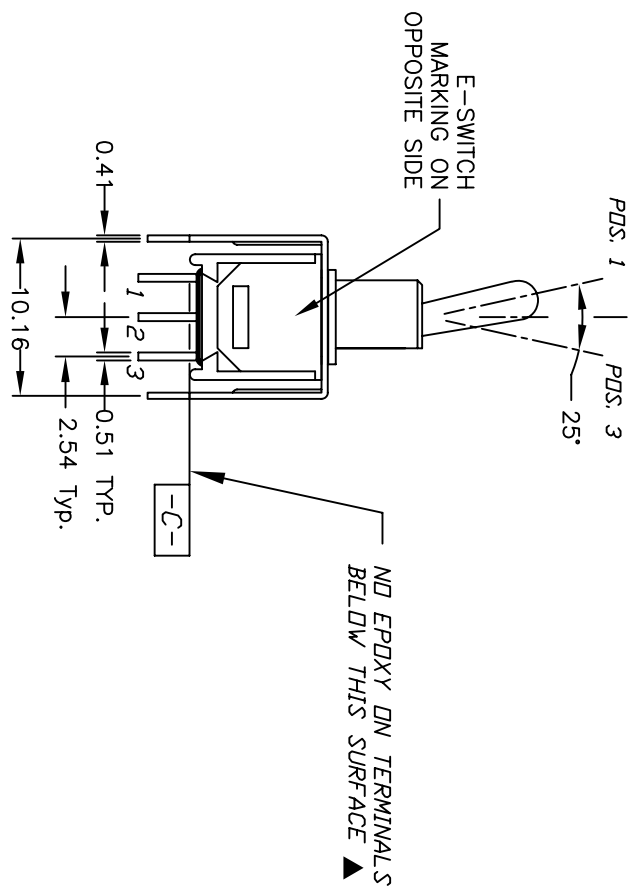


RECOMMENDED P.C.B. LAYOUT

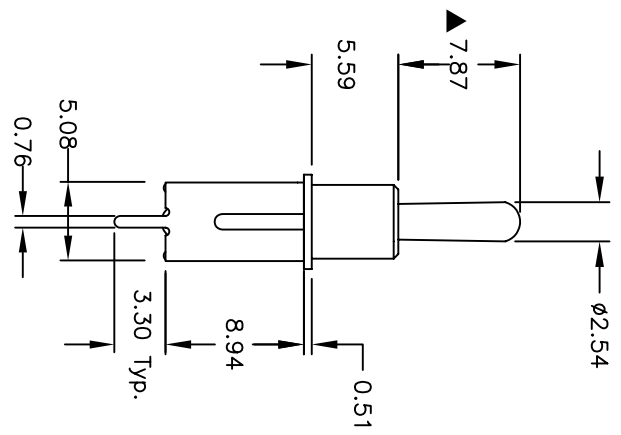

CIRCUIT: SPDT CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	NONE	DN	
2-3	OPEN	2-1	

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. CONTACT RATING: 0.4 (VA) max. @20 VAC or DC max.
 5. CONTACT MATERIAL: GOLD
 6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
 7. INSULATION RESISTANCE: 1,000 M ohm min.
 8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 9. OPERATING TEMP.: -30°C to 85°C
 10. 2002/95/EC (ROHS) COMPLIANT
 11. ▲DENOTES CRITICAL PARAMETER.

C	16700	FIXED ACTUATOR UPDATE NOTES	11/27/06	TN
B	11538	REVISED ACTUATOR	6/11/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
200MSP1TSB2V52RE				
SCALE	DATE	DR	DWG	REV
2:1	11/27/2006	TN	T211060	C



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED